
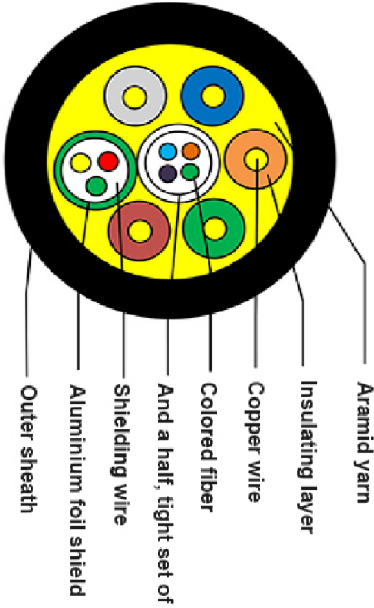
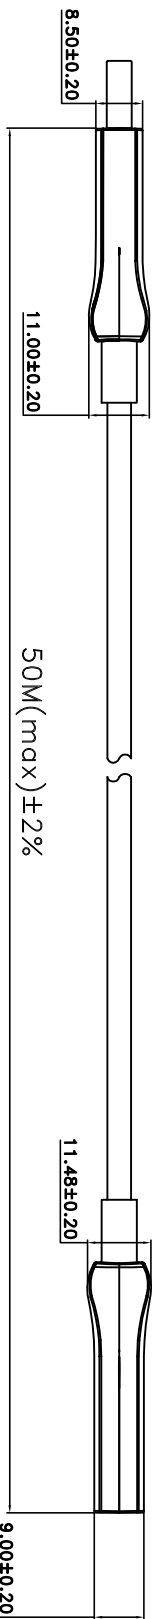
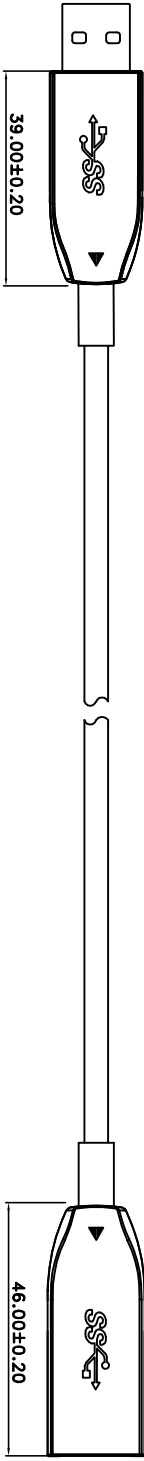

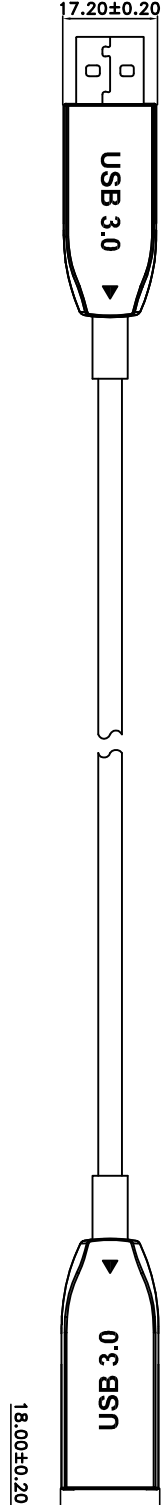


MARK	DATE	ECON NO.	DESCRIPTION	REV.	DESIGN
△1					



- NOTE:
- Compatible with USB Gen1 Spec 5 Gbps standard.
  - No loss of signal
  - Hybrid optical cable with fiber and copper wire
  - PIN gold plated, shell Nickel plating
  - Environmental Specifications: For Indoor use only;
  - Operating temperature: -40°C to 70°C
  - Minimum bending radius 20mm
  - Max. tension force: 100N
  - 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
  - Round cable Black PVC jacket
  - RoHS 2.0 & REACH compliant
  - Packing: package 1pc reel

赤壁市高清光电科技有限公司  
Chibi HD photoelectric technology co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCE				UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL	ANG	TOL	DIM	TOL
.X	±3.0'	.X	±0.10	.X	±2.0'	.XX	±0.05
.XX	±2.0'	.XX	±0.05	.XXX	±1.0'	.XXX	±0.03

图号	日期	品名	USB 3.0 A Male to A Female AOC
制图	CLH	产品编号	
审核		单位	mm
核准		比例	1:1
		页码	1/1
		版本	1