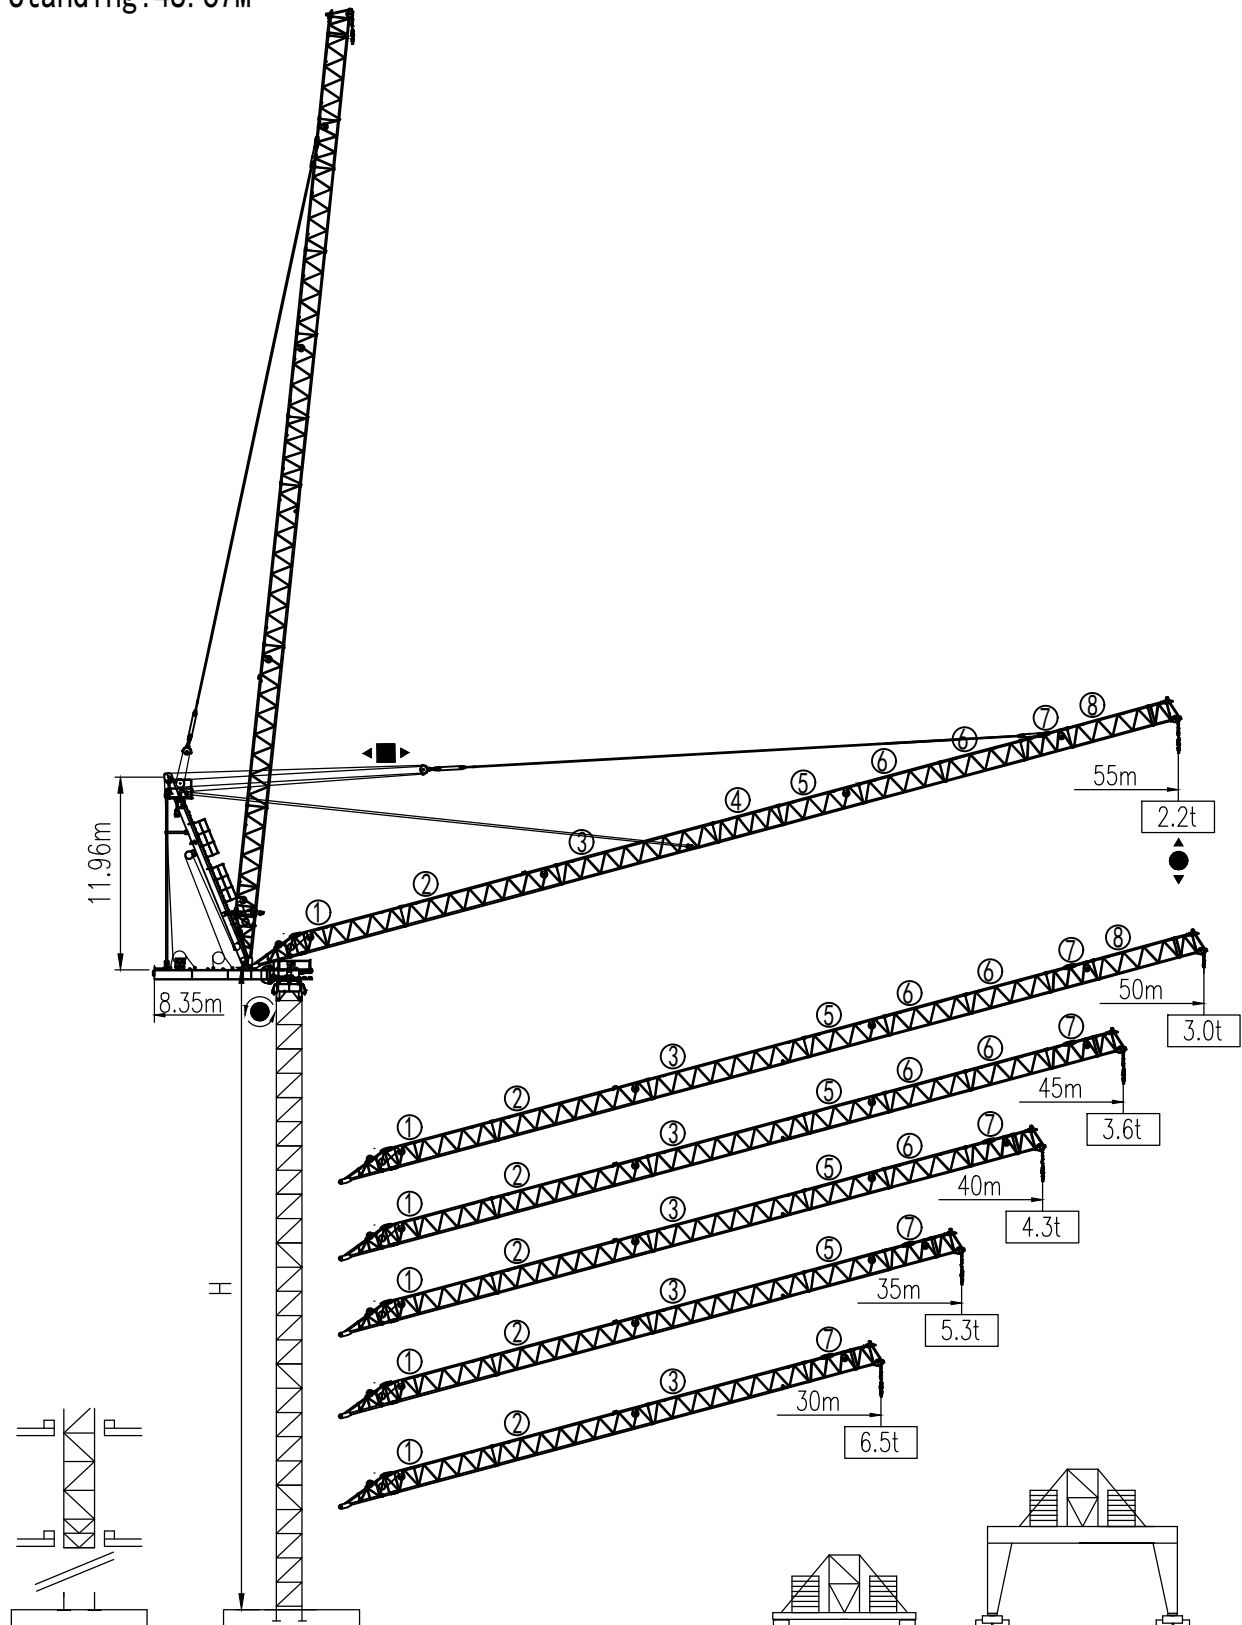




沈阳三洋建筑机械有限公司
SHENYANG SANYO BUILDING MACHINERY CO., LTD

Max Load:10Ton
Jib:55M
Tip Load:2.2Ton
Free Standing:48.67M

TOWER CRANE QTD 160t · m
(GL25/22)



塔身截面L68B1 Mast 12mx2m

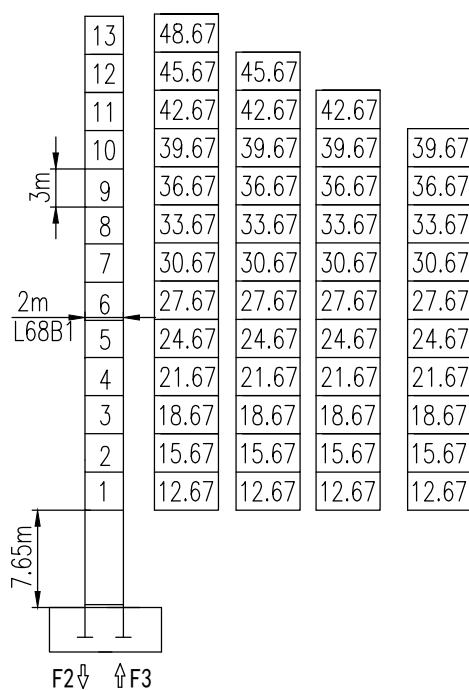
30-55m

30-35m

40-45m

50m

55m

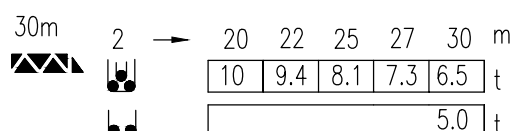
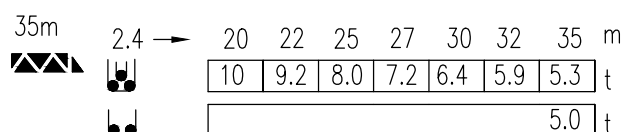
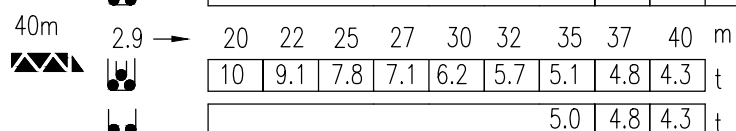
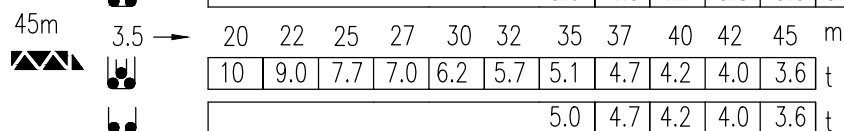
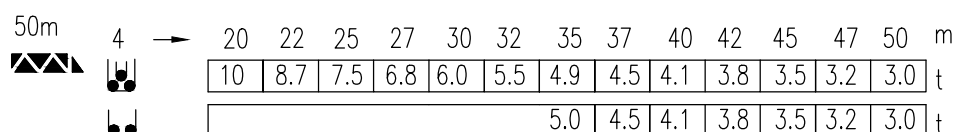



F2 • 176t ■ 208t

F3 • 130t ■ 158t

73t

载荷特性 Load diagrams



固定式附着高度 Anchoring height of stationary crane

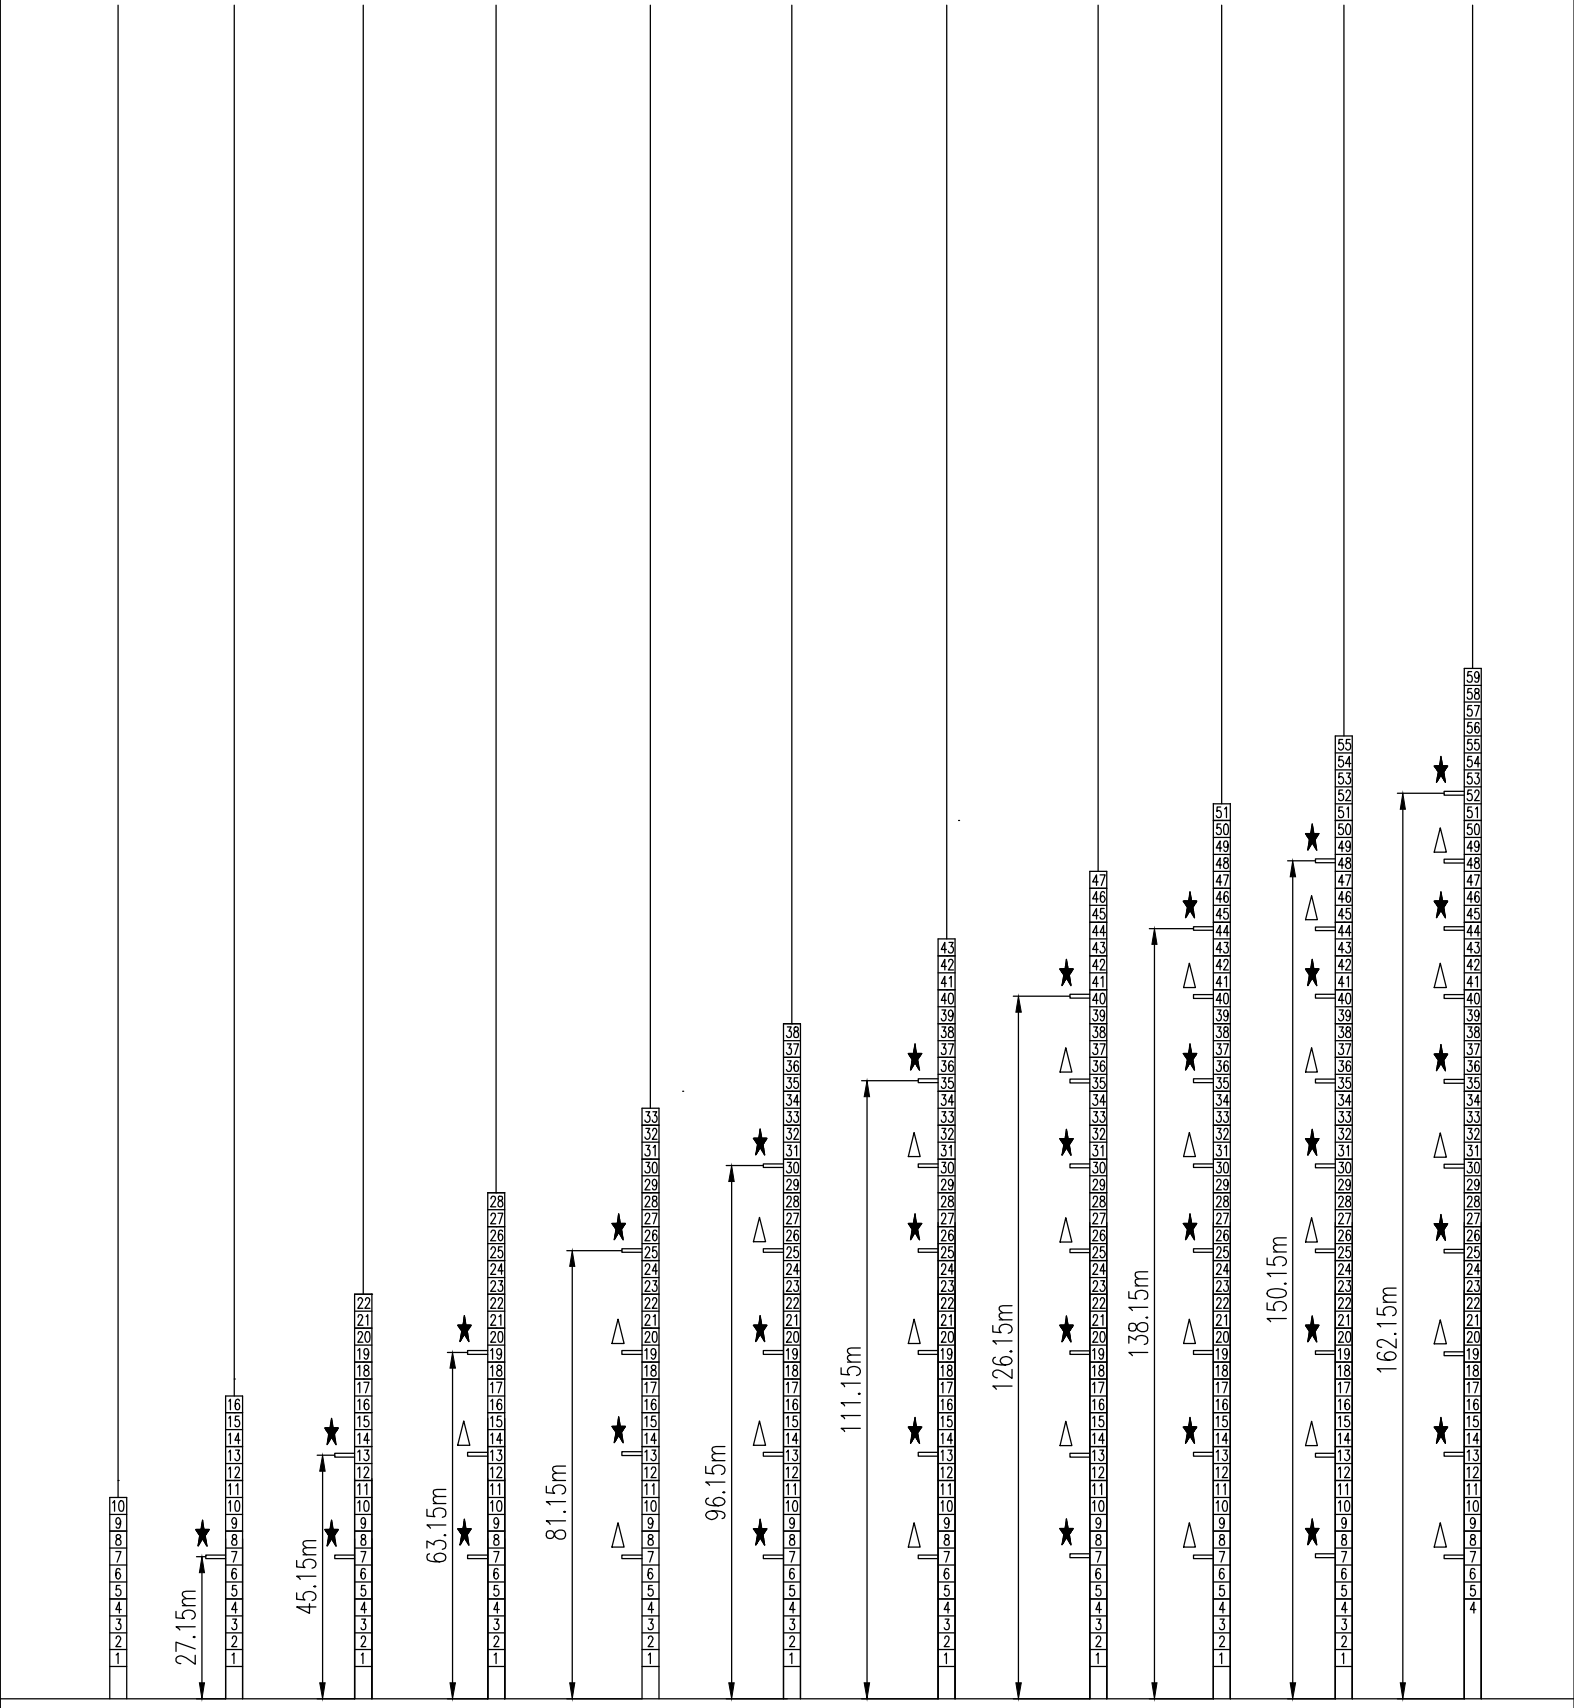
★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released

如需达到更高的高度，请与我们联系。For greater heights,consult us.

55m臂长附着排布

39.67m 57.67m 75.67m 93.67m 108.67m 123.67m 138.67m 150.67m 162.67m 174.67m 186.67m



固定式附着高度 Anchoring height of stationary crane

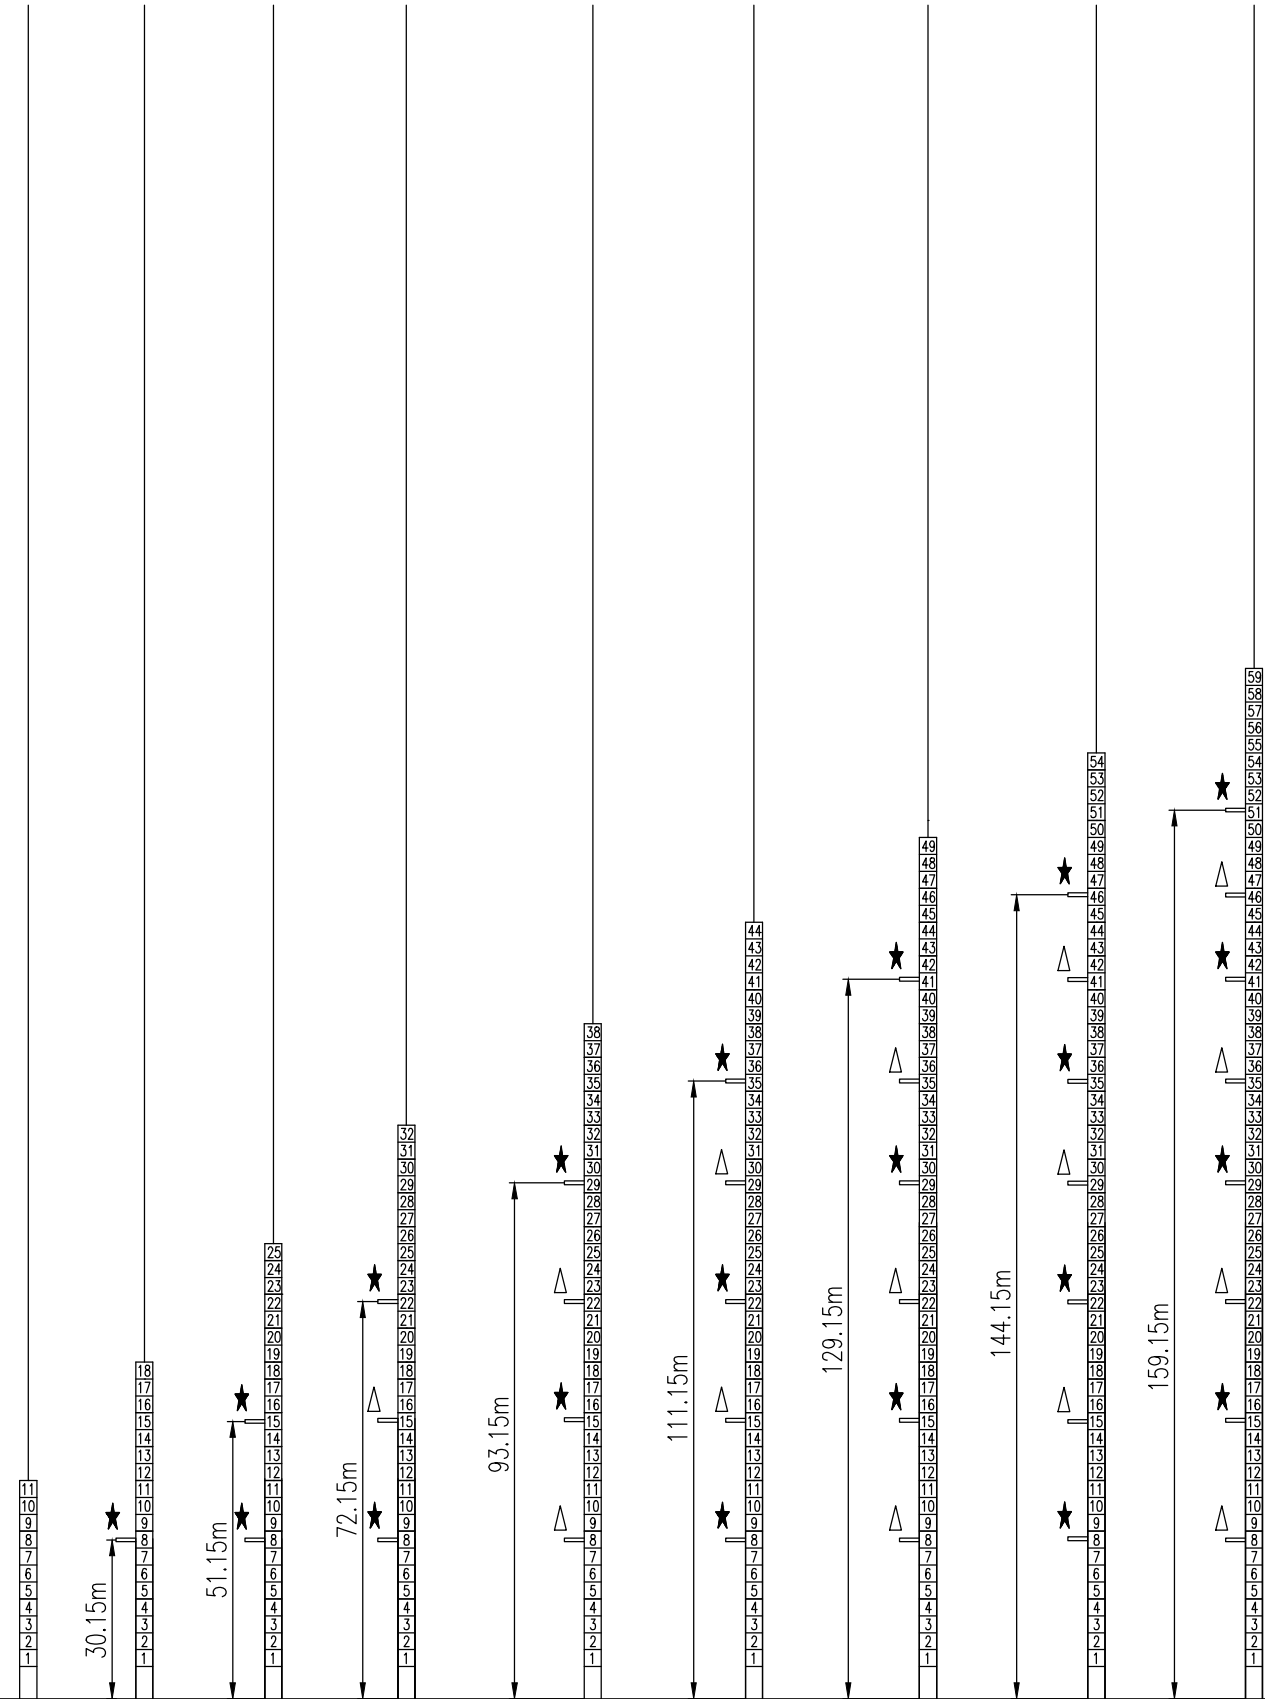
★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released

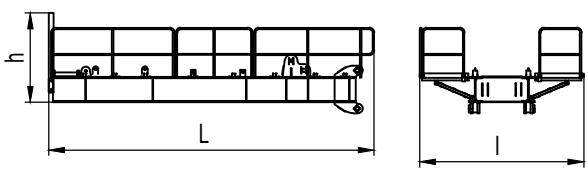
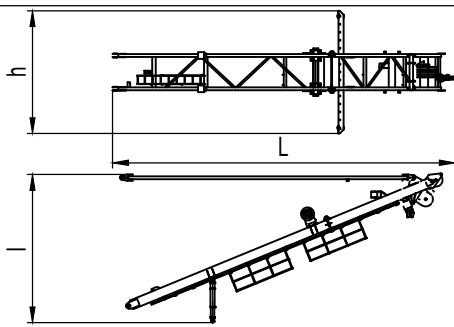
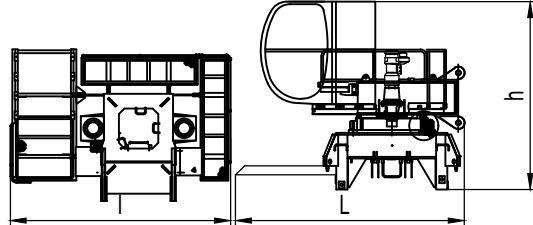

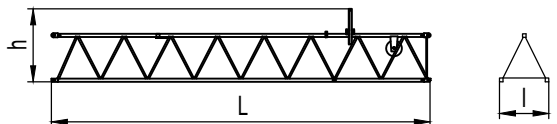


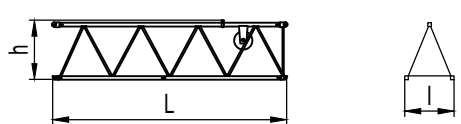

如需达到更高的高度，请与我们联系。For greater heights,consult us.

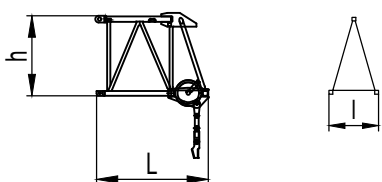
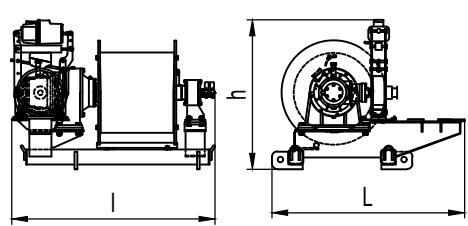
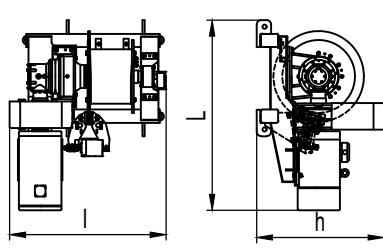
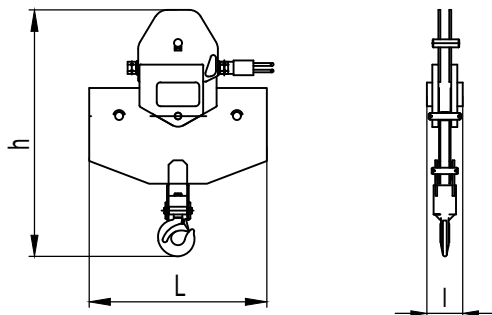
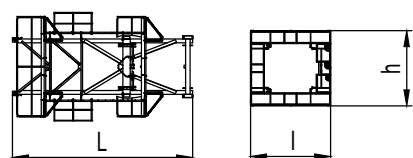
50m臂长附着排布

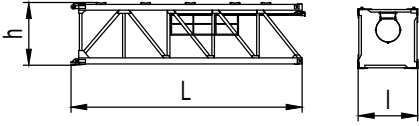




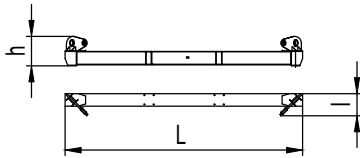


42.67m 63.67m 84.67m 105.67m 123.67m 141.67m 156.67m 171.67m 186.67m



外形尺寸重量表 Dimensions weights

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
平衡臂 Counter-jib		7.83	3.86	2.41	6874
塔 头 Cat-head		12.89	6.01	4.62	6755
回转总成 Pivot		4.04	3.99	2.83	10331
起重臂节 Jib section	 1	10.2	1.41	1.44	1627
起重臂节 Jib section	 2	10.13	1.35	1.95	1214
起重臂节 Jib section	 3	10.11	1.39	1.34	881
起重臂节 Jib section	 4	4.34	1.35	1.34	407
起重臂节 Jib section		5	5.28	1.33	500
		6	5.28	1.33	405
		8	5.28	1.33	437
起重臂节 Jib section	 7	3.14	1.33	1.36	357

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg	
起重臂节 Jib section		9	1.81	1.33	1.67	495
起升机构 Hoisting mechanism		1.88	1.92	1.85	2000	
变幅机构 Luffing mechanism		1.31	1.81	1.46	2280	
吊钩滑轮组 Hook assembly		1.57	0.25	1.67	321	
顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg	
顶升套架 Telescopic cage		7.26	4.3	4.05	4863	

塔身部分 Mast		L(m)	l(m)	h(m)	Kg
基础节 Basic mast		7.76	2.0	2.1	4320
标准节 Standard mast		3.26	2.2	2.2	1820
底部 Base		L(m)	l(m)	h(m)	Kg
固定支脚 Fixing angles		1.2	0.6	0.6	295
底架塔节 Chassis mast		3.82	2.48	2.48	3260
底架纵梁 Side member		7.14	2.51	0.52	2009
底架横梁 Traverse		6.38	0.58	0.8	1410
底架撑杆 Brace rod		4.45	0.35	0.32	710
底架水平杆 Horizontal member		2.44	0.22	0.24	151

机构特性 Mechanisms specification														 m	Kw
起 升 Hoisting		45JLF25A	m/min	0-4.8	0-20	0-40	0-60	0-80	0-2.4	0-10	0-20	0-30	0-40	500	45
			t	5	5	5	2.5	1.25	10	10	10	5	2.5	>500*	
变 幅 Trolleying		37JDF40BY	min	0-2.8											37
回 转 Slewing		9SVF	r/min	0-0.8										9x2	
		145SVT		145Nm ^x 2											
行 走 Travelling		4TRVF	m/min	0-12										4x4	



 电源	Power Supply	380V 50Hz /440V 60Hz
KVA 供电容量	Necessary Electric Power	200KVA

* 同我们协商, Consult us
★ 标准配置, Standard configuration

平衡臂配重
Counter-jib ballast

		 (t)
55m	8.35m	13
50m	8.35m	12
45m	8.35m	11
40m	8.35m	10
35m	8.35m	8
30m	8.35m	6

可变换的其它安装方式
Mounting possibilities



同我们协商
Consult us

F 反力 Reactions	● 工作状态 In service ■ 非工作状态 Out of service	自重 Self-load	不带载荷及配重, 最大臂长及标准高度时的自重. Without load and counter-weight with longest jib and standard height
-------------------	---	-----------------	---