



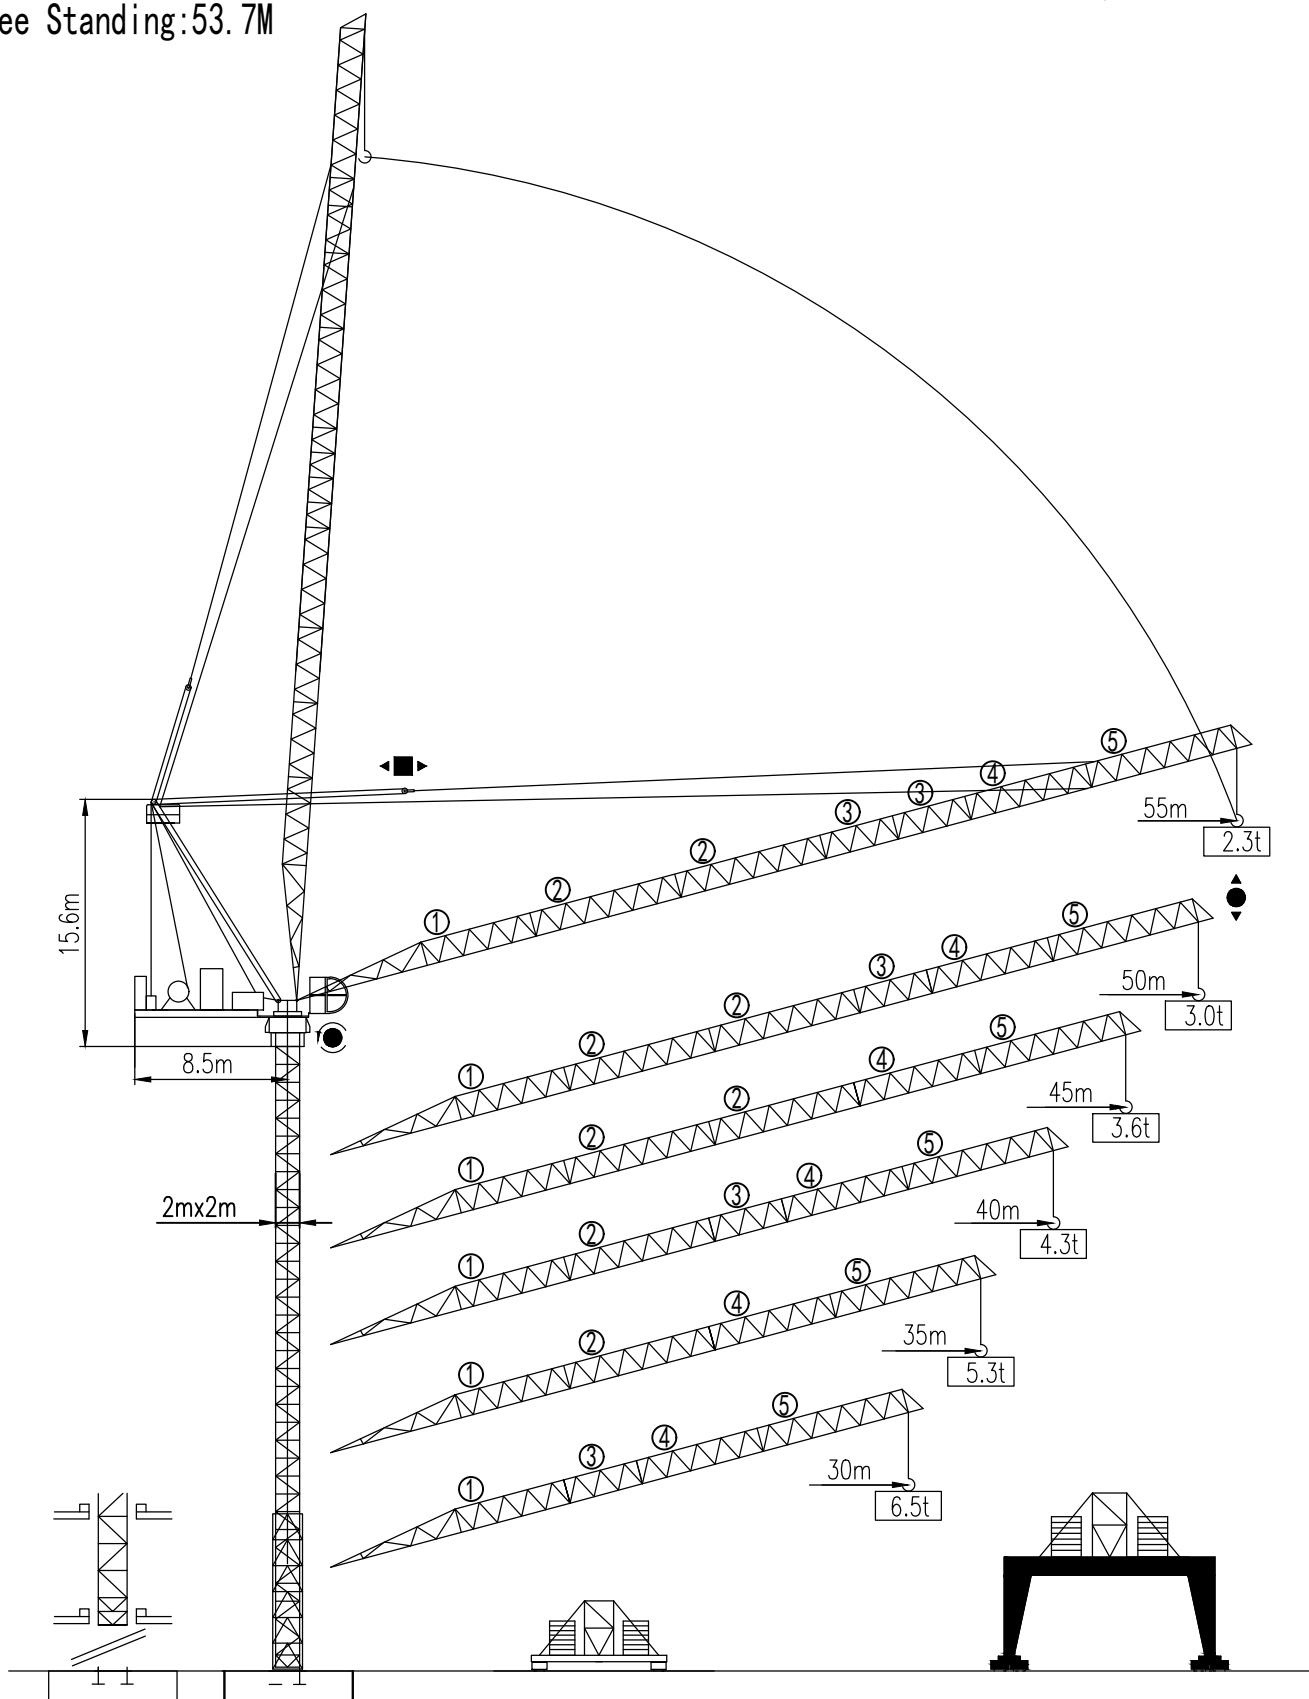
沈阳三洋建筑机械有限公司
SHENYANG SANYO BUILDING MACHINERY CO., LTD

Max Load:10Ton
Jib:55M
Tip Load:2.3Ton
Free Standing:53.7M

TOWER CRANE

QTD 160t · m

GL25/23





塔身截面L69R Mast □ 2mx2m

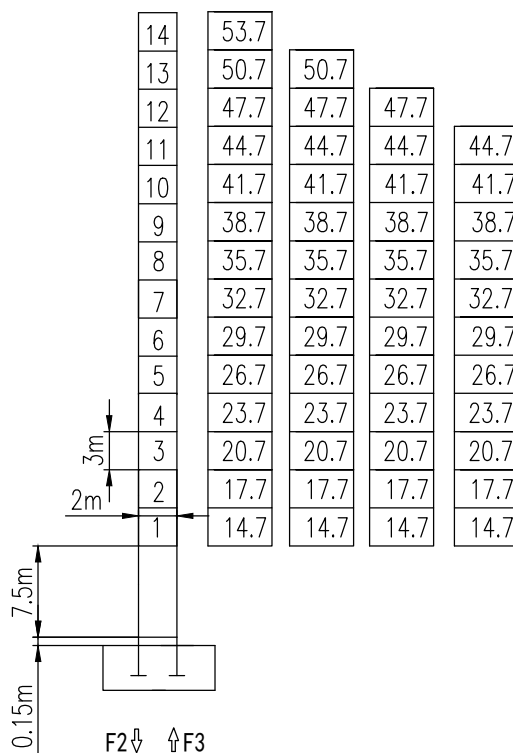
30-55m

30-35m

40-45m


50m

55m



F2	• 233t	▪ 286t
F3	• 175	▪ 229t
⊕	85t	

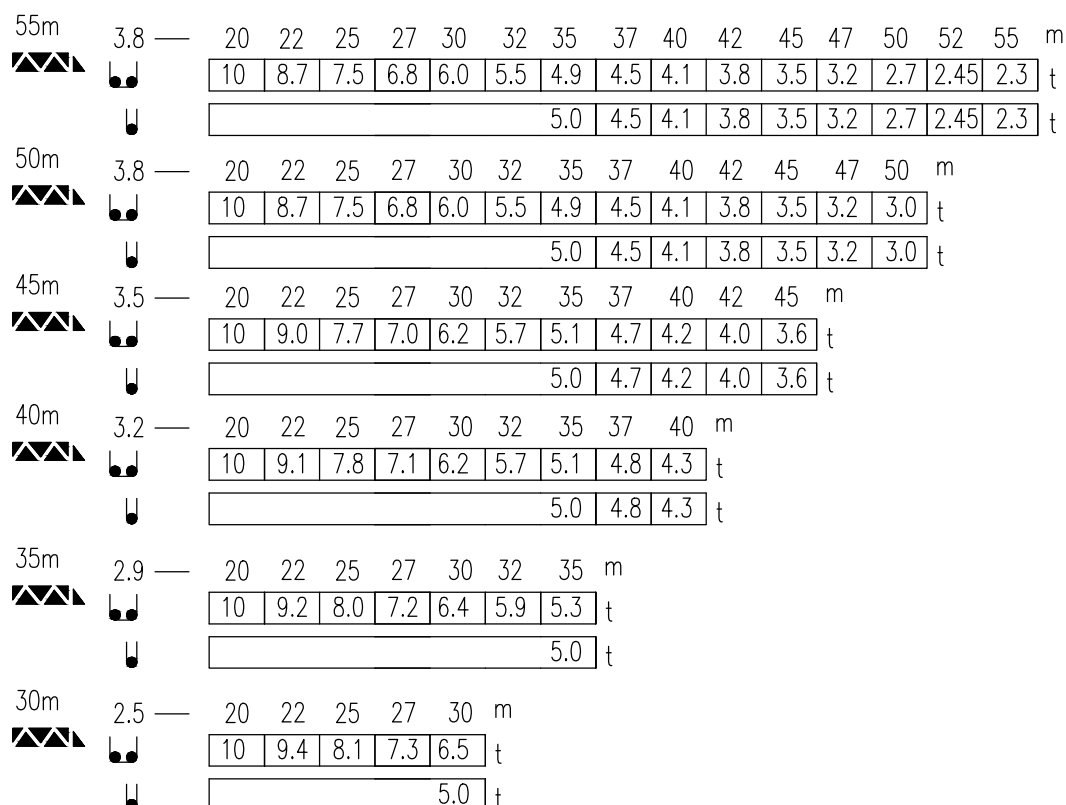载荷特性 Load diagrams






固定式附着高度 Anchoring height of stationary crane



★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released

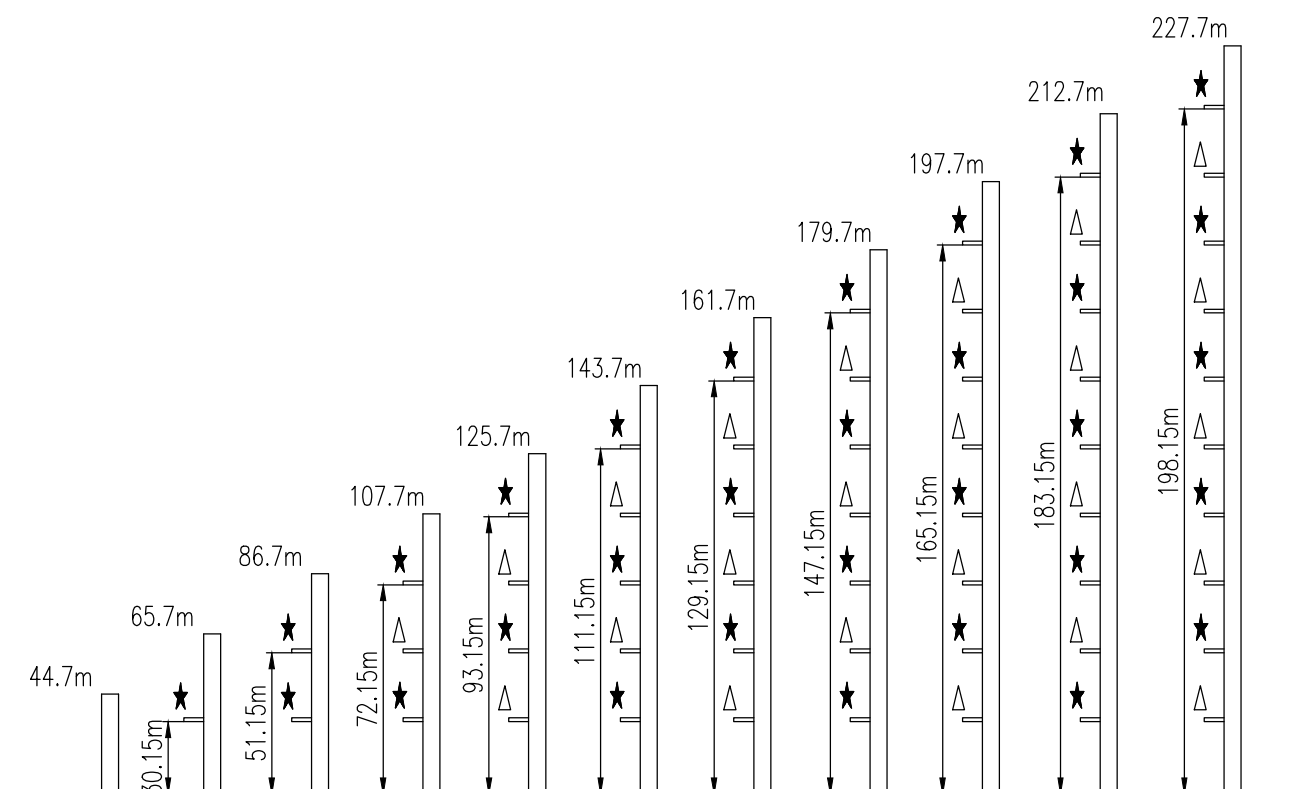如需达到更高的高度，请与我们联系。For greater heights,consult us.




塔身截面L69R Mast 2mx2m

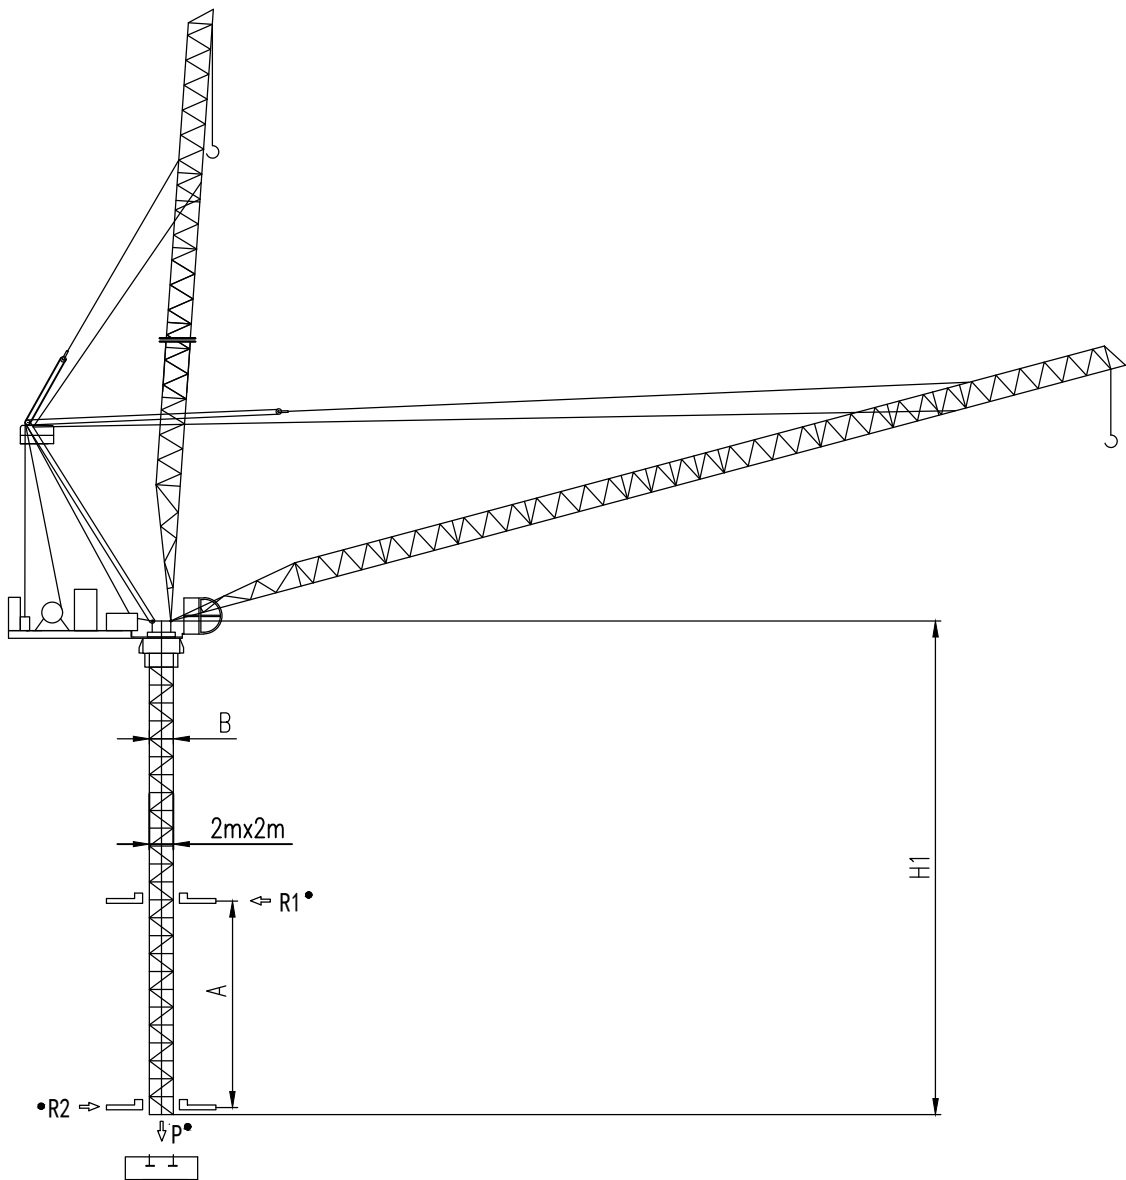

	L69B1
A	12m-15m
B	2.0m
C	3.0m
D	2.2m
H1	37m
R1	41t
R2	37t
P	141t

● 工作状态无系数
In service without coefficient









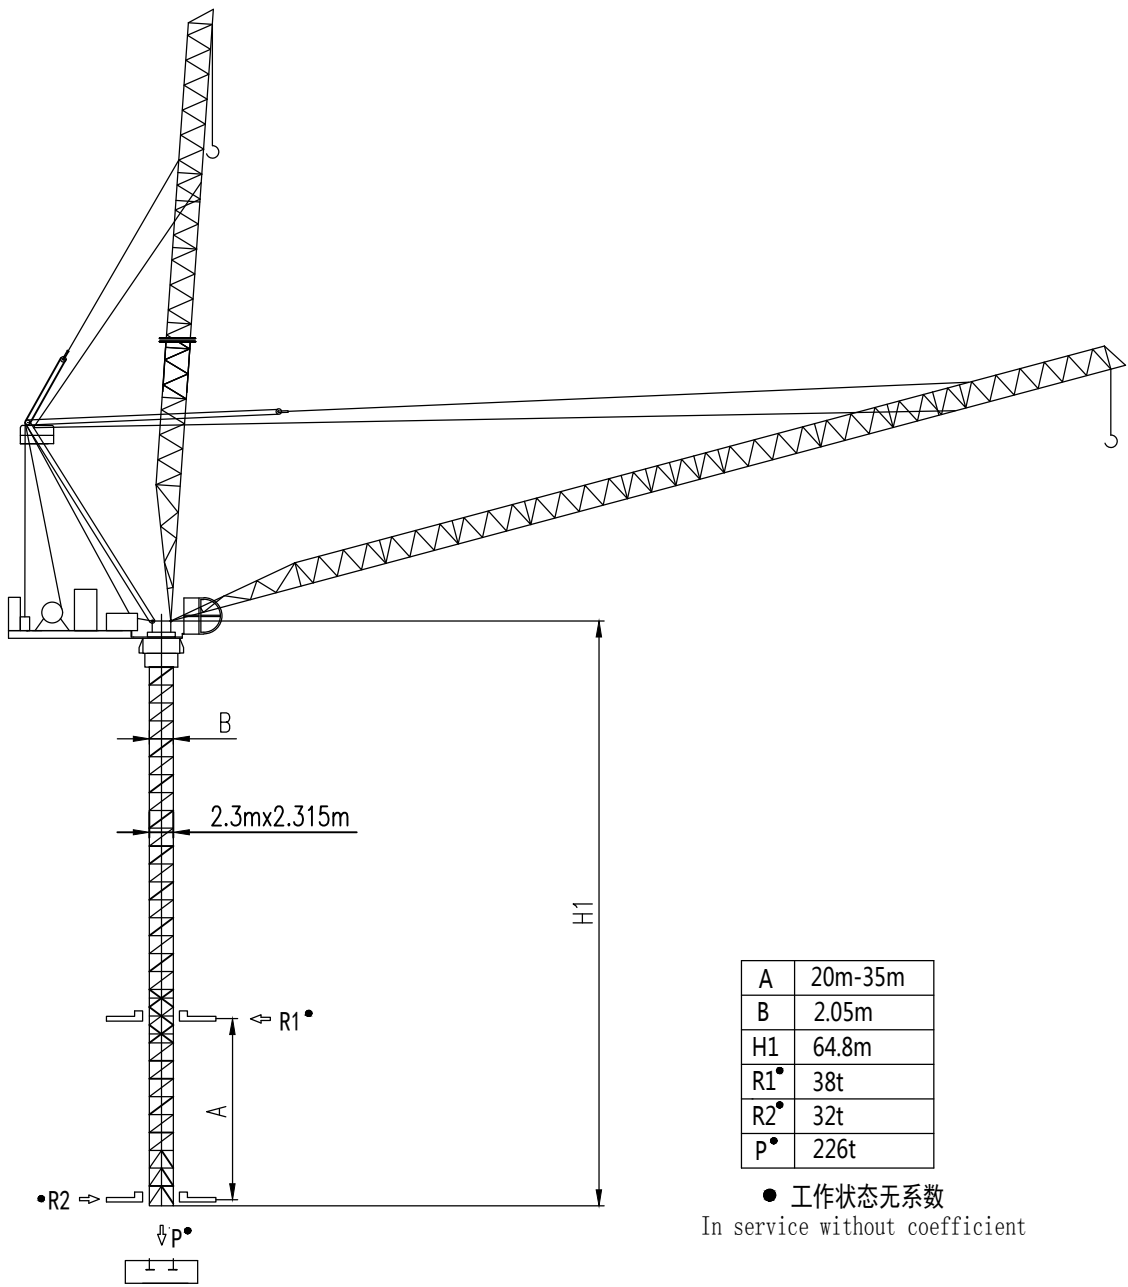
塔身截面 Mast $\square 2.3\text{m} \times 2.315\text{m}$











A	20m-35m
B	2.05m
H1	64.8m
$R1^\bullet$	38t
$R2^\bullet$	32t
$P^\bullet$	226t

● 工作状态无系数
In service without coefficient

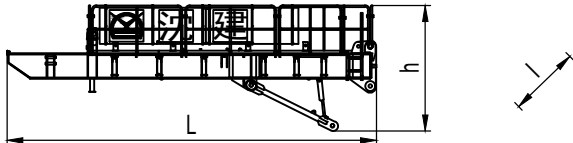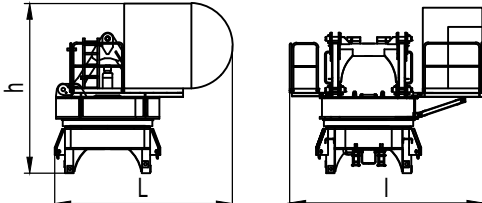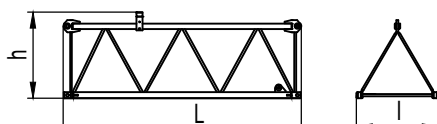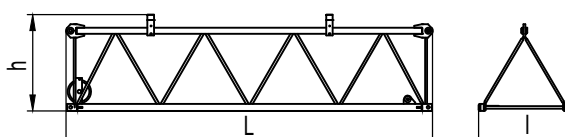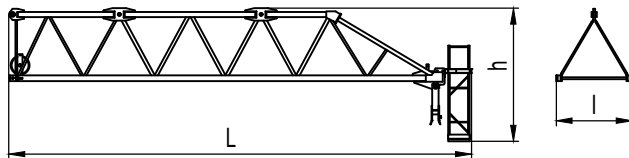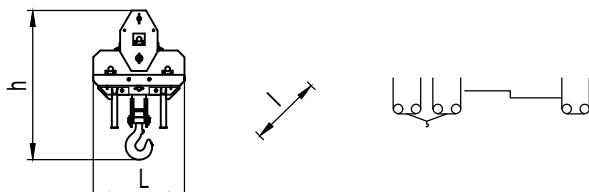外形尺寸重量表 Dimensions weights

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
平衡臂 Counter-jib		8.7	4	2.95	7846
塔 头 Cat-head		7.1	2.48	11.8	5776
回转机构 Slewing mechanism		3.8	4.6	4	11251
起重臂节 Jib section		10.23	1.79	1.87	1708
起重臂节 Jib section		10.2	1.79	1.95	1460
起重臂节 Jib section		5.2	1.79	1.89	760
起重臂节 Jib section		7.2	1.79	1.89	995
起重臂节 Jib section		10.9	1.82	3.15	2025
吊钩滑轮组 Hook assembly		1.34	0.83	2.2	909

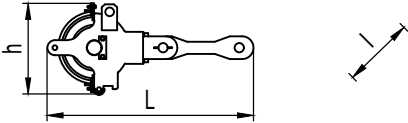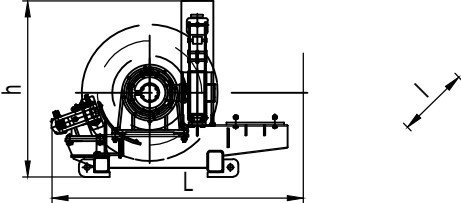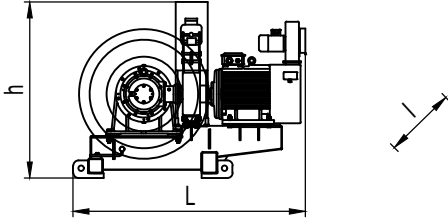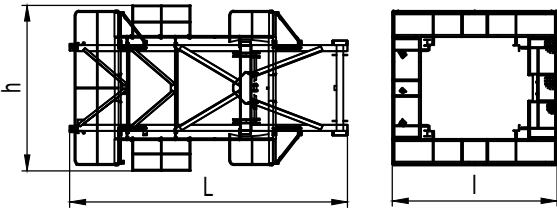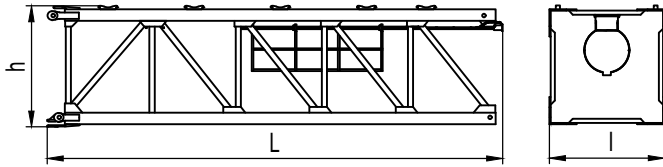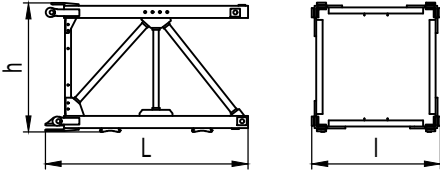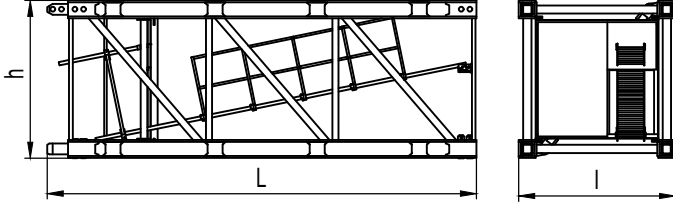塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
变幅滑轮组 Luffing pulley block		1.4	0.5	0.6	230
变幅机构 Luffing mechanism		2.5	1.9	1.7	3190
起升机构 Hoisting mechanism		2.2	2.2	1.8	2965
顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg
顶升套架 Telescopic cage		7.26	4.3	4.4	5810
塔身部分 Mast		L(m)	l(m)	h(m)	Kg
基础节 Basic mast		7.95	2.1	2.11	5120
标准节 Standard mast		3.31	2.1	2.11	2260
标准节 H 标准节		6.305	2.3	2.315	6270
固定支脚 Fixing angles		1.37	0.8	0.8	470

机 构 特 性 Mechanisms specification															Kw
起 升 Hoisting		55JLF25Y	m/min	0—5	0—21	0—42	0—63	0—84	0—2.5	0—10.5	0—21	0—31.5	0—42	720	55
			t	5	5	5	2.5	1.25	10	10	10	5	2.5	>720*	
变 幅 Luffing		55JLF40A	min	0—3											55
回 转 Slewing		9SVF	r/min	0—0.8											9x2
		145SVT													145Nmx2
行 走 Travelling															



 电 源	Power Supply	380V 50Hz /440V 60Hz
KVA 供电容量	Necessary Electric Power	200KVA

* 同我们协商, Consult us
 ★ 标准配置, Standard configuration

平衡臂配重
Counter-jib ballast

		 (t)
55m	8.5m	23
50m	8.5m	19
45m	8.5m	17
40m	8.5m	14
35m	8.5m	12
30m	8.5m	12

可变换的其它安装方式
Mounting possibilities



同我们协商
Consult us

F 反力 Reactions	● 工作状态 In service ■ 非工作状态 Out of service	 自 重 Self-load	不带载荷及配重, 最大臂长及标准高度时的自重. Without load and counter-weight with longest jib and standard height
-------------------	---	--	---