




塔身截面 L69B2 Mast □ 2mx2m

40-75m

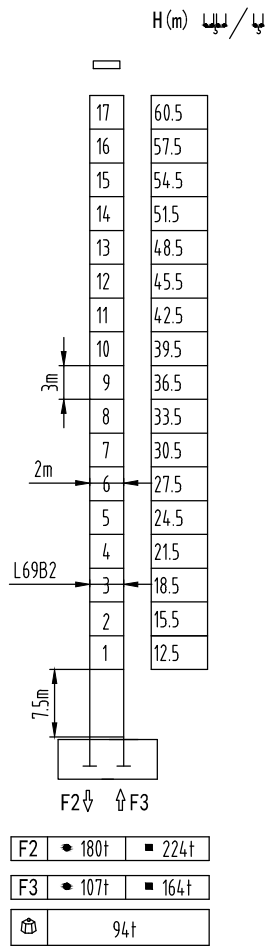


固定式附着高度 Anchoring height of stationary crane

★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released

如需达到更高的高度，请与我们联系。For greater heights, consult us.

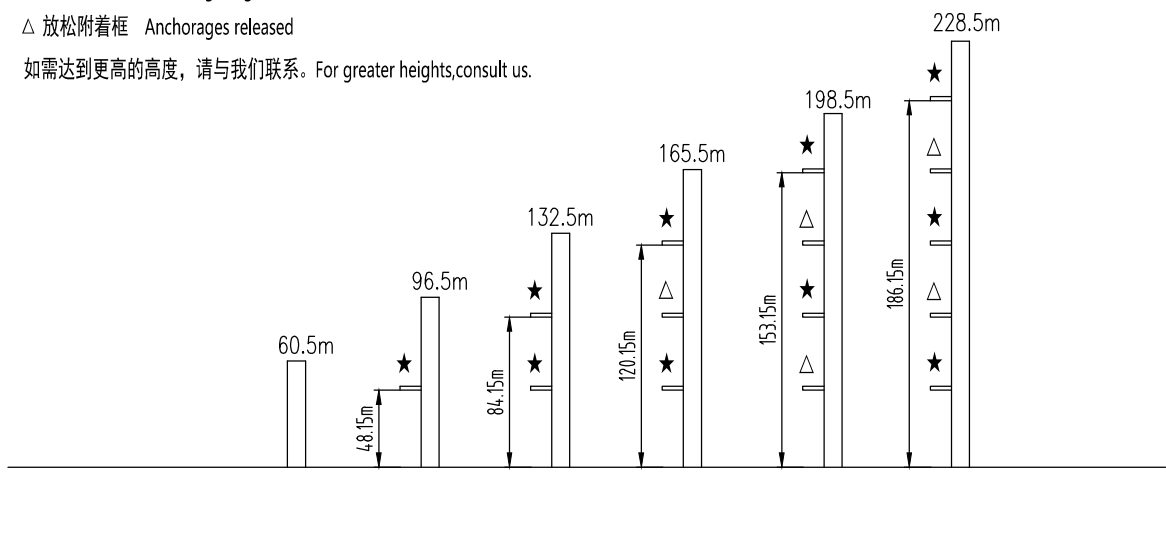

载荷特性 Load diagrams

75m	3.1-	22.28	25	30	35	40	45	50	55	60	65	70	75	m
		12	10.49	8.46	7.02	6.00	5.13	4.48	3.94	3.5	3.13	2.81	2.53	t
3.1-		40.7 45 50 55 60 65 70 75 m												
		6.00 5.30 4.65 4.11 3.67 3.30 2.98 2.7 t												

70m	3.1-	23.96	25	30	35	40	45	50	55	60	65	70	m
		12	11.42	9.23	7.68	6.53	5.64	4.93	4.36	3.88	3.48	3.13	t
3.1-		43.8 45 50 55 60 65 70 m											
		6.00 5.81 5.10 4.53 4.05 3.65 3.30 t											

65m	3.1-	25.18	30	35	40	45	50	55	60	65	m
		12	9.79	8.16	6.95	6.01	5.27	4.66	4.16	3.73	t
3.1-		46.1 50 55 60 65 m									
		6.00 5.44 4.83 4.33 3.90 t									

60m	3.1-	25.96	30	35	40	45	50	55	60	m
		12	10.15	8.46	7.21	6.25	5.48	4.85	4.33	t
3.1-		47.5 50 55 60 m								
		6.00 5.65 5.02 4.50 t								

55m	3.1-	26.69	30	35	40	45	50	55	m
		12	10.48	8.75	7.46	6.47	5.67	5.03	t
3.1-		48.9 50 55 m							
		6.00 5.84 5.20 t							

50m	3.1-	27.89	30	35	40	45	50	m
		12	11.03	9.22	7.87	6.83	6.20	t


45m	3.1-	28.12	30	35	40	45	m
		12	11.14	9.31	7.95	6.90	t

40m	3.1-	28.65	30	35	40	m
		12	10.65	9.52	8.13	t

/ 标准小车可使用 2/4倍率绳 standard trolley 2/4 fall.

使用四倍率时, 应从二倍率的载荷中减去0.17吨

When using subtract 0.17t from the loads

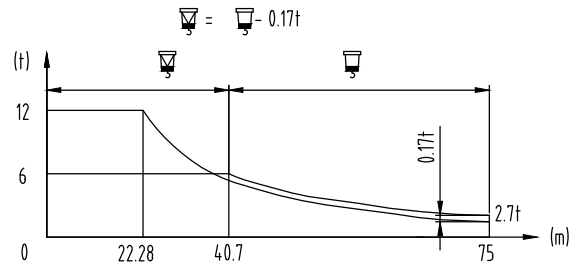



机构特性 Mechanisms specification														Kw	
起升 Hoisting		Y55JLF30PC ★	m/min	0-5.4	0-22.5	0-45	0-67.5	0-90	0-2.7	0-11.25	0-22.5	0-33.5	0-45	650★ >650★	55
			t	6	6	6	3	1.5	12	12	12	6	3		
变幅 Trolleying		6JXF5	m/min	0-64									5.5		
回转 Slewing		9SVF	r/min	0-0.8									9x3		
		145SVT		145Nm x 3											
行走 Travelling		5.2TRVF	m/min	0-15									5.2x4		
电源 Power Supply		380V 50Hz / 440V 60Hz													
KVA 供电容量 Necessary Electric Power		150KVA													

- ★ 同我们协商, Consult us
- ★ 标准配置, Standard configuration

平衡臂配重
Counter-jib ballast

		(t)
75m	21.24m	25.2
70m	21.24m	23.6
65m	21.24m	22.7
60m	21.24m	21.1
55m	21.24m	18.8
50m	17.24m	25.2
45m	17.24m	22.0
40m	17.24m	20.4

可变换的其它安装方式
Mounting possibilities



同我们协商
Consult us

F 反力 Reactions	<ul style="list-style-type: none"> ● 工作状态 In service ■ 非工作状态 Out of service 	自重 Self-load	不带载荷及配重, 最大臂长及标准高度时的自重。 Without load and counter-weight with longest jib and standard height
-------------------	---	-----------------	---