




沈阳三洋建筑机械有限公司
SHENYANG SANYO BUILDING MACHINERY CO., LTD


Max Load: 18Ton
Jib: 60M
Tip Load: 2.8Ton
Free Standing: 47.7M

TOWER CRANE QTD 260t · m
(HL45/28B)

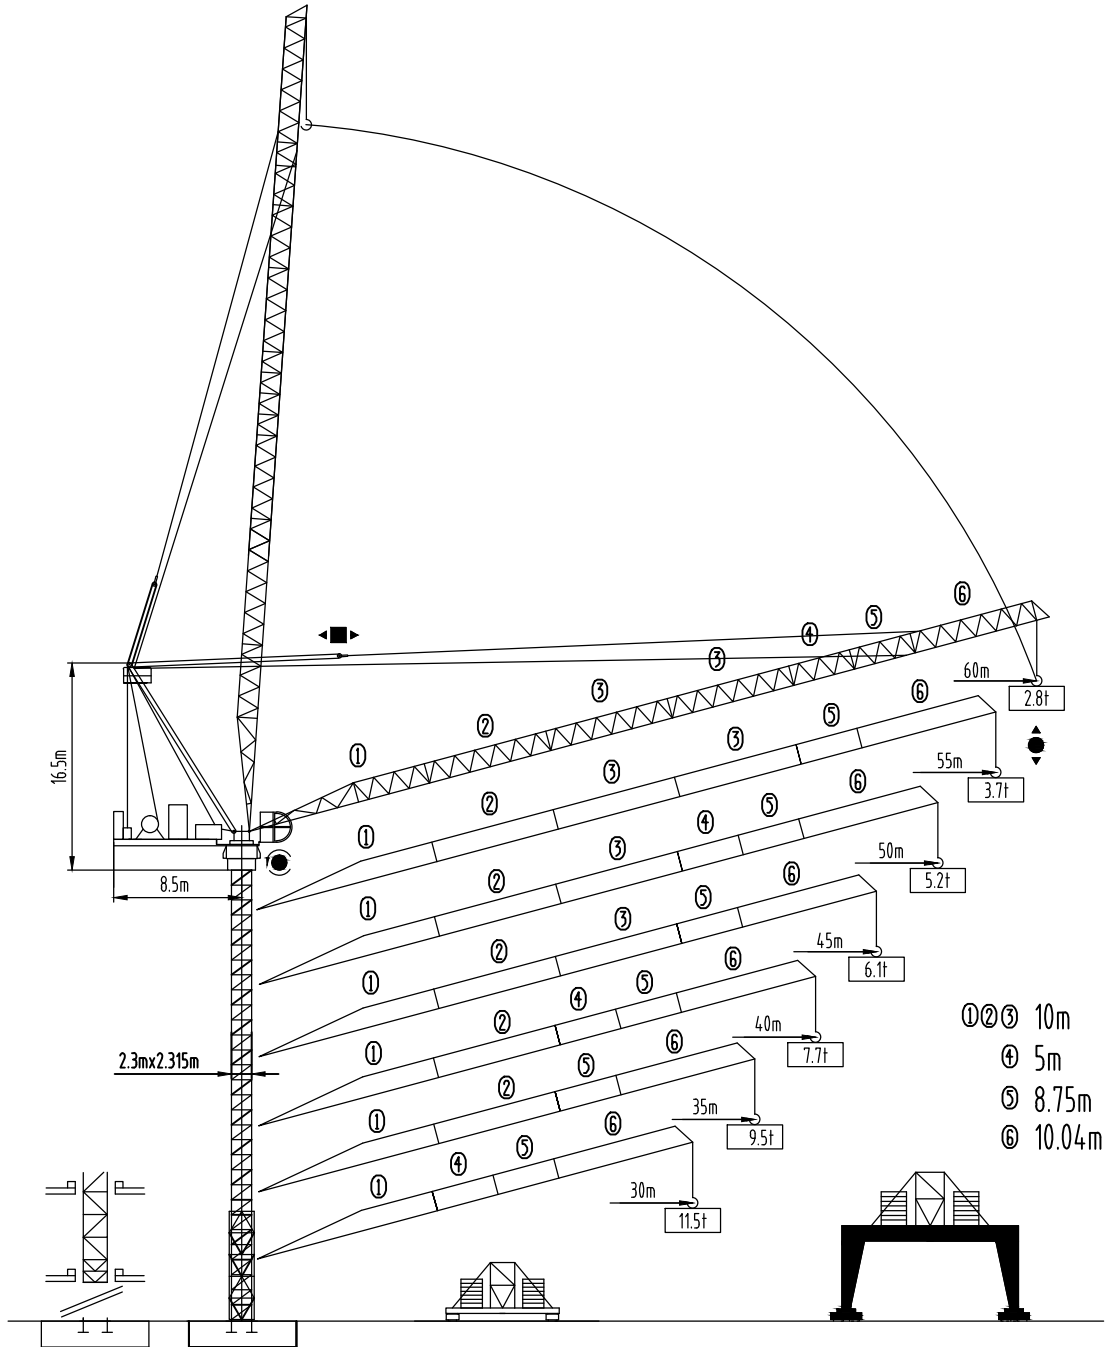



塔身截面 Mast \square 2.3m \times 2.315m H型钢

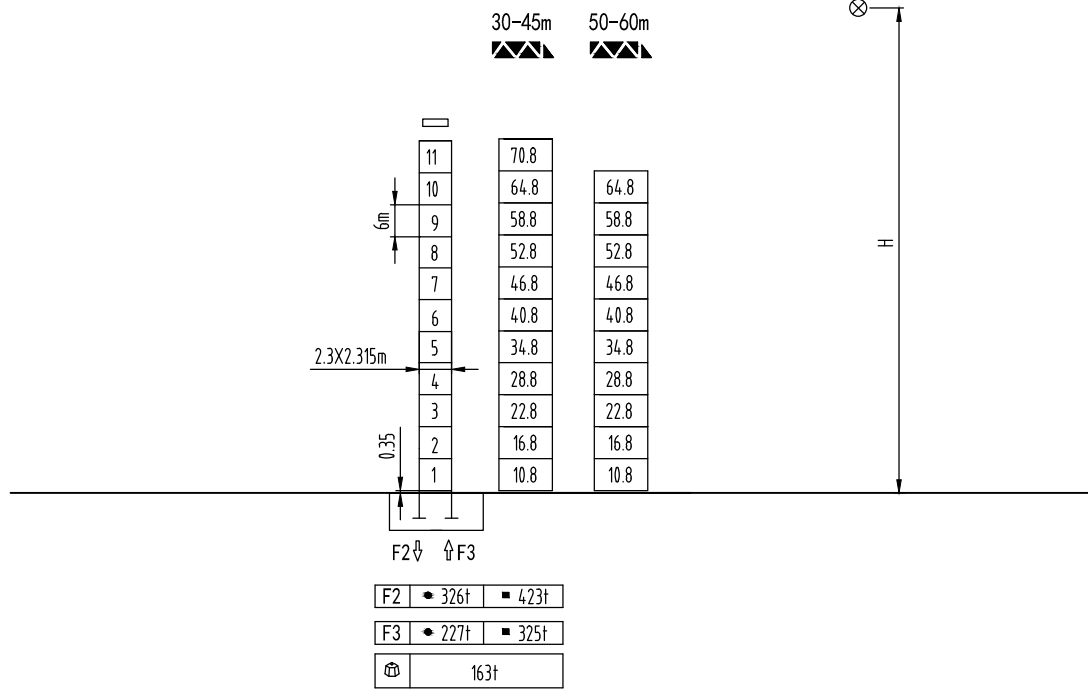


固定式附着高度 Anchoring height of stationary crane

★ 紧固附着框 Anchorages tightened


△ 放松附着框 Anchorages released

如需达到更高的高度, 请与我们联系。For greater heights, consult us.

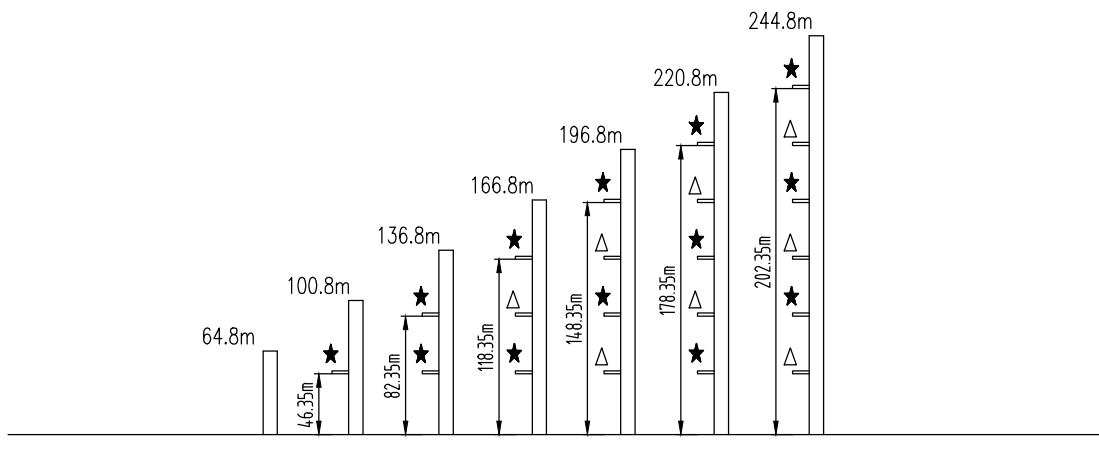


载荷特性 Load diagrams

60m	4.5	35.5	37	40	42	45	47	50	52	55	57	60	m							
	↓	9	8	6.9	6.3	5.5	5	4.3	3.9	3.3	3.1	2.8	t							
55m	4.2	19.5	22.4	25	27	28	30	32	35	35.7	36.5	37.5	40	42	45	47	50	52	55	m
	↓	18	16	13.6	12.1	11.4	10.4	9.6	8.7	8.5	8.1	7.5	6.7	6.1	5.2	4.7	4.3	3.9	3.3	t
50m										9	8.6	8.0	7.2	6.6	5.7	5.2	4.7	4.3	3.7	t
45m	3.8	19.5	22.5	25	27	28	30	32	36	37	38.1	40	42	45	47	50	m			
	↓	18	16	13.7	12.2	11.6	10.6	9.8	8.5	8.0	7.4	6.9	6.3	5.5	5.2	4.8	t			
40m										9	8.5	7.9	7.4	6.8	5.9	5.6	5.2	t		
45m	3.5	19.6	22.7	25	27	28	30	32	35	36.3	38.5	40	42	45	m					
	↓	18	16	13.9	12.3	11.8	10.8	10.1	9.1	8.5	7.5	7.1	6.6	5.7	t					
40m										9	8	7.5	7	6.1	t					
40m	3.1	19.7	22.8	25	27	28	30	32	35	36.7	39.2	40	m							
	↓	18	16	14	12.5	12.1	11.1	10.3	9.3	8.5	7.5	7.2	t							
35m										9	8	7.7	t							
35m	2.8	19.9	23.1	25	27	28	30	32	35	m										
	↓	18	16	14.3	12.8	12.3	11.3	10.5	9.5	t										
30m									9	t										
30m	2.4	20.2	23.4	25	27	28	30	m												
	↓	18	16	14.6	13	12.5	11.5	t												
30m								9	t											

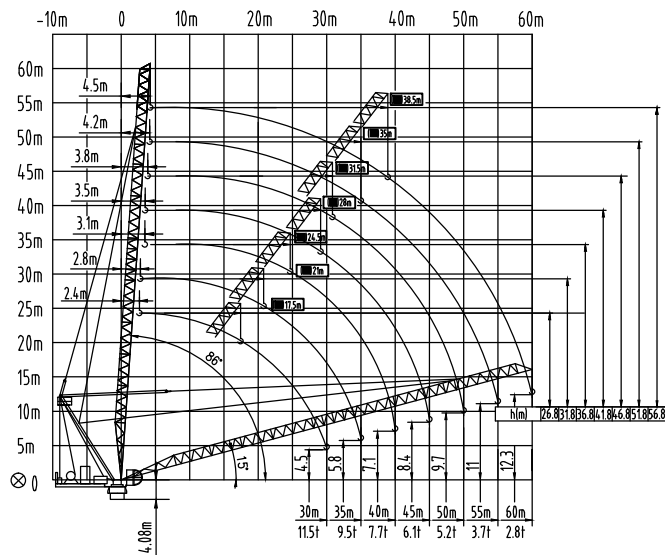

(■) Weather vaning position 风向标位置
 (⊗) Jib hinge shaft 臂杆铰点










外挂塔机 External climbing crane







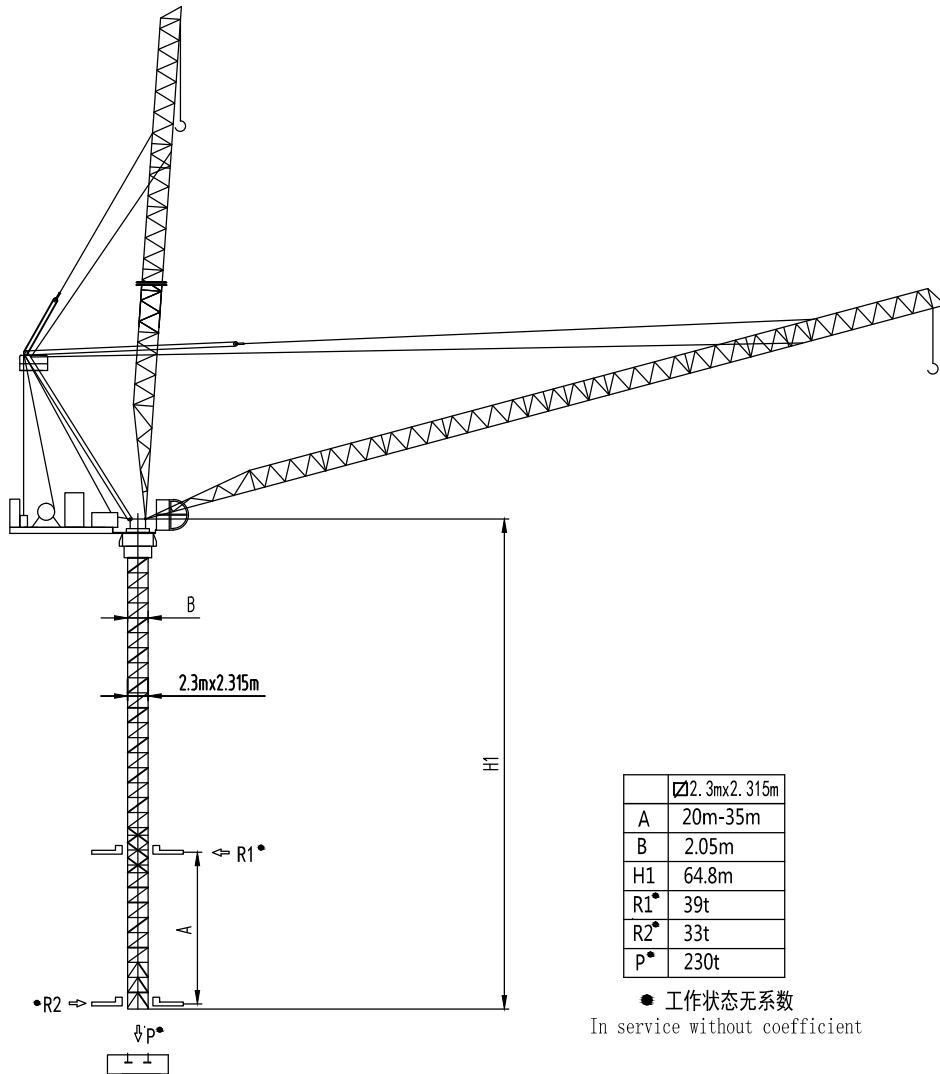






	□2.3m x 2.315m
A	20m-35m
B	2.05m
H1	64.8m
R1	39t
R2	33t
P	230t



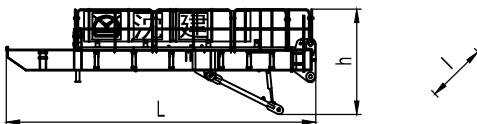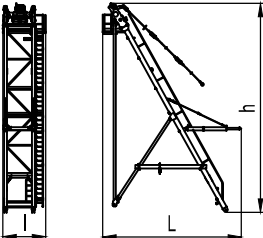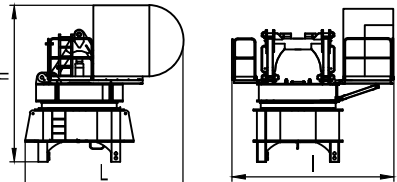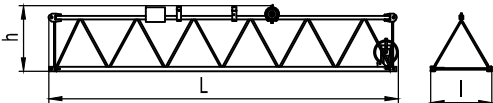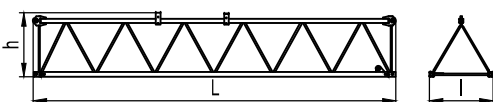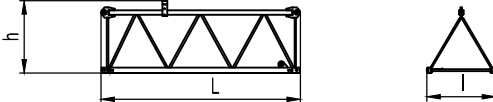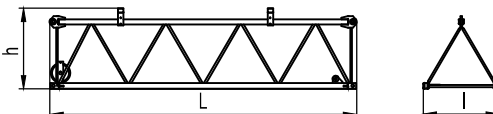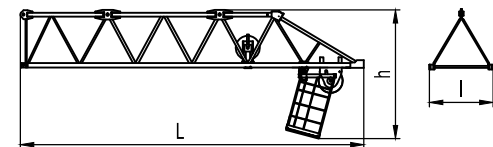



● 工作状态无系数
In service without coefficient

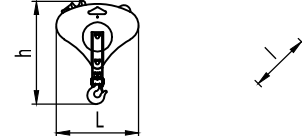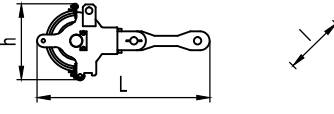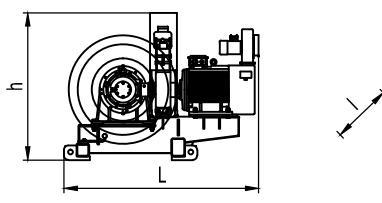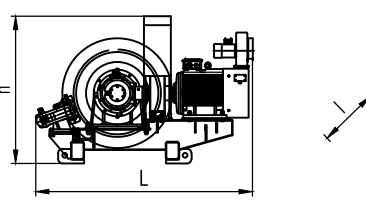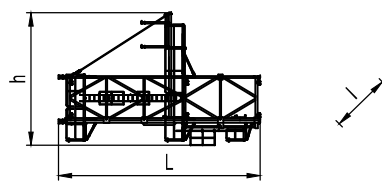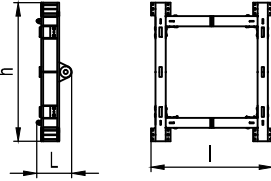外形尺寸重量表 Dimensions weights

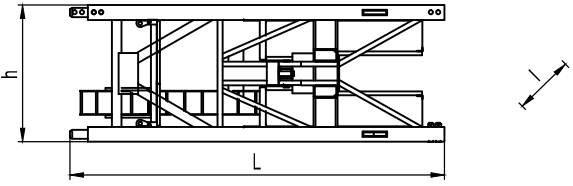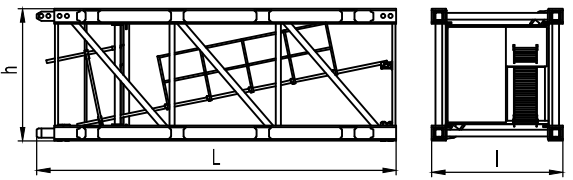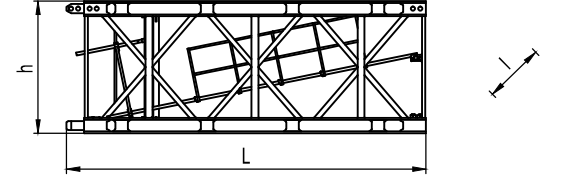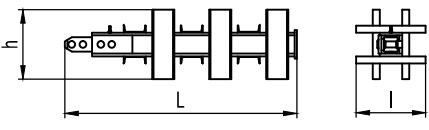塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
平衡臂 Counter-jib		8.7	4	2.95	8365
塔头 Cat-head		7.8	2.48	12.2	6536
回转机构 Slewing mechanism		4.06	4.6	4.4	14045
起重臂节 Jib section		10.23	1.79	1.995	2485
起重臂节 Jib section		10.2	1.79	1.92	2055
起重臂节 Jib section		10.2	1.79	1.9	1900
起重臂节 Jib section		5.2	1.79	1.89	1035
起重臂节 Jib section		8.95	1.79	1.89	1895
起重臂节 Jib section		10.2	1.82	3.85	2605




塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
吊钩滑轮组 Hook assembly		1.85	0.39	2.32	775
变幅滑轮组 Luffing pulley block		1.4	0.5	0.6	230
起升机构 Hoisting mechanism		3.72	2.29	2.4	11456
变幅机构 Luffing mechanism		2.44	1.96	1.66	3076
顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg
顶升套架 Telescopic cage		12.6	4.7	8.3	16195
框架 Frame		0.9	3.13	3.56	4755
爬条 Climb		5.1	0.2	0.54	6020

顶升装置 Telescoping equipment					
顶升节 Telescoping mast		6.305	2.3	2.315	8180
塔身部分 Mast		L(m)	l(m)	h(m)	Kg
H 标准节 Standard mast		6.305	2.3	2.315	6270
加强节 Reinforcing mast		6.305	2.3	2.315	8180
底部 Base		L(m)	l(m)	h(m)	Kg
固定支脚 Fixing angles		2.61	0.78	0.78	820


机构特性 Mechanisms specification		↓							↓						Kw
起升 Hoisting		90LVF105DBY	m/min	0-4.32	0-18	0-36	0-54	0-72	0-2.16	0-9	0-18	0-27	0-36	1040	90
		90LVF105DB	m/min	0-4.8	0-19.6	0-39.3	0-59	0-78.6	0-2.4	0-9.8	0-19.65	0-29.5	0-39.3	696	
			t	9	9	9	4.5	2.25	18	18	18	9	4.5	>104.0*	
变幅 Luffing		63JLF50BY	min	0-3										63	
回转 Slewing		9SVF	r/min	0-0.8										9x2	
		145SVT		145Nm x 2											
行走 Travelling		5.2TRVF	m/min	0-15										5.2x4	
 电源 Power Supply		380V 50Hz / 440V 60Hz													
KVA 供电容量 Necessary Electric Power		200KVA													

- * 同我们协商, Consult us
- * 标准配置, Standard configuration

平衡臂配重
Counter-jib ballast

		 (t)
60m	8.5m	34
55m	8.5m	32
50m	8.5m	30
45m	8.5m	29
40m	8.5m	27
35m	8.5m	25
30m	8.5m	22

可变换的其它安装方式
Mounting possibilities

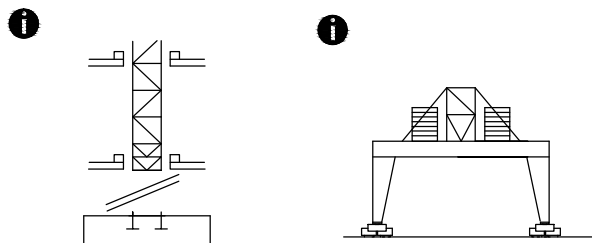

 同我们协商
Consult us

F 反力 ● 工作状态 In service ⊕ 自重 不带荷载及配重, 最大臂长及标准高度时的自重.
Reactions ■ 非工作状态 Out of service Self-load Without load and counter-weight with longest jib and standard height