



沈阳三洋建筑机械有限公司

SHENYANG SANYO BUILDING MACHINERY CO., LTD

最大载荷 (Max Load) : 12t

臂长幅度 (Jib) : 55m

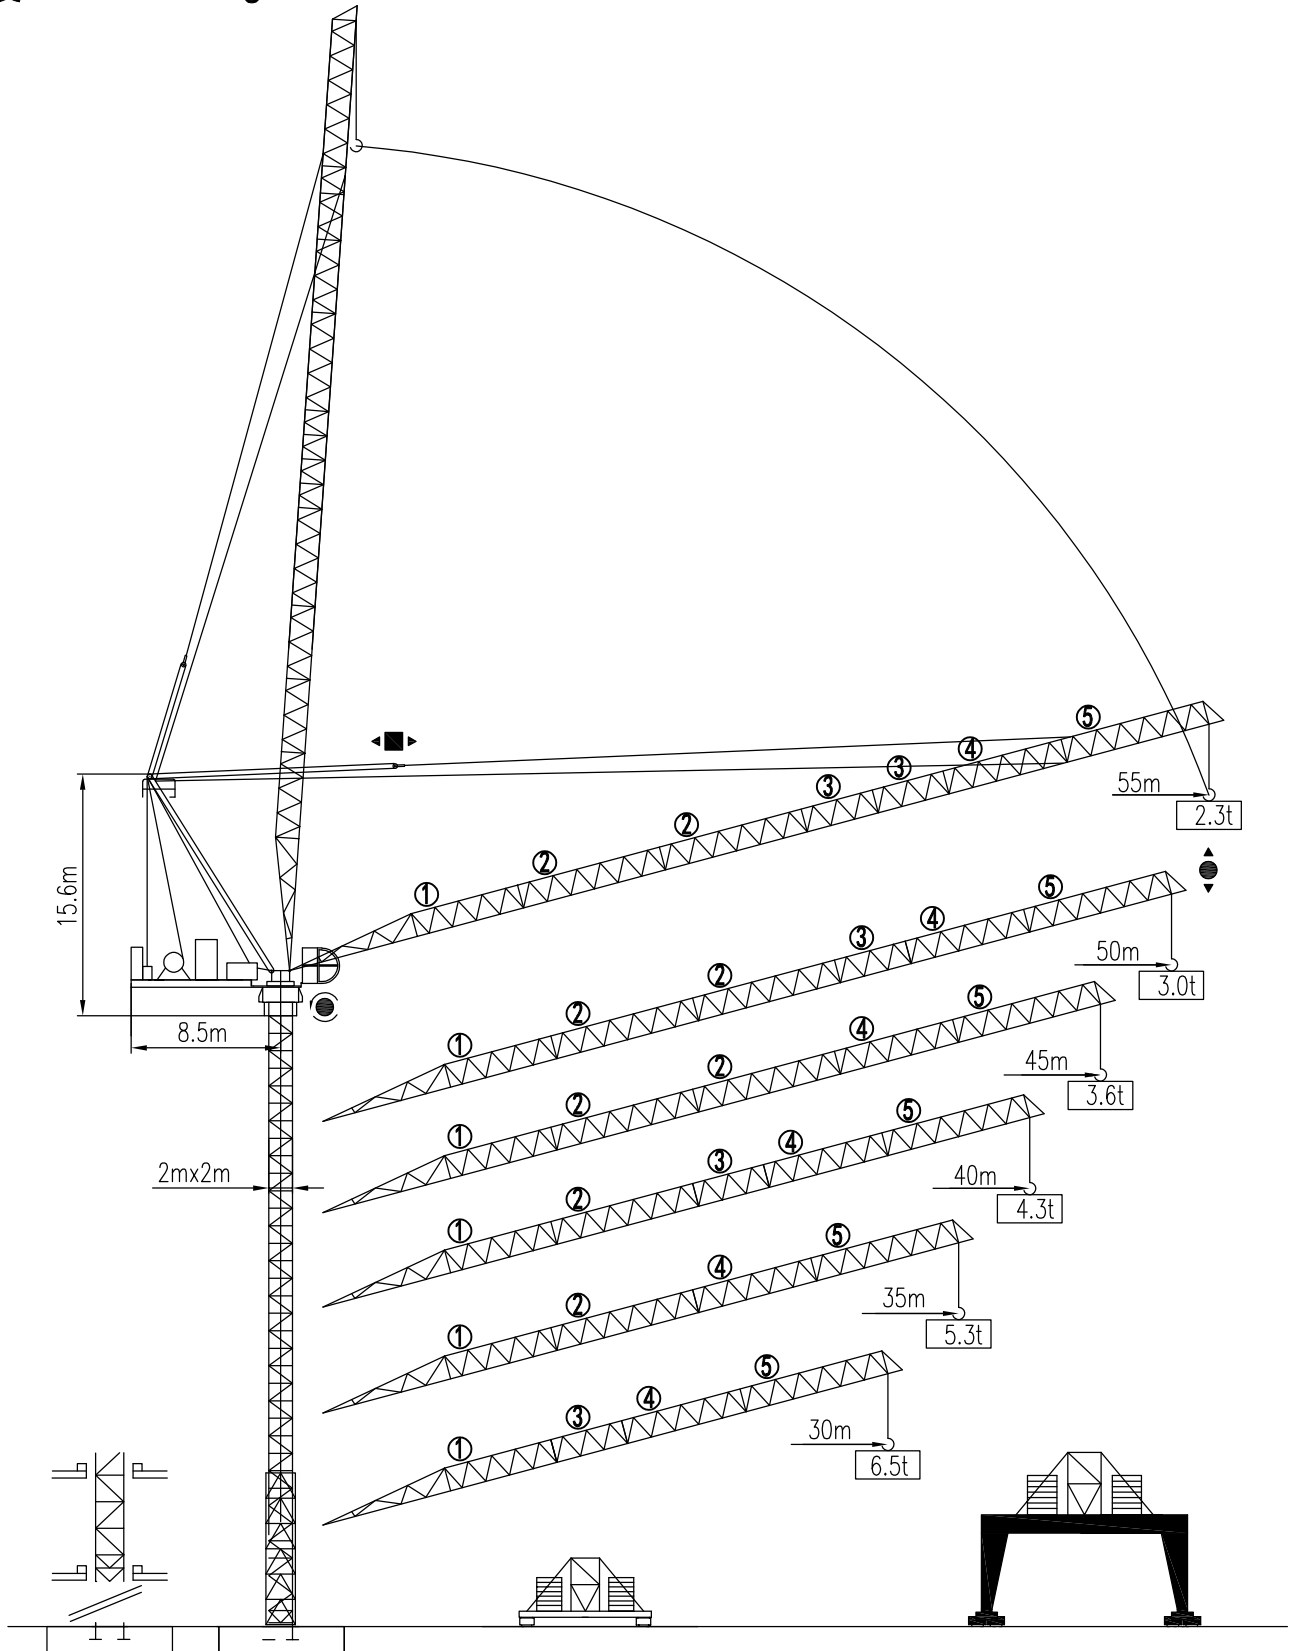
臂端吊载 (Tip Load) : 2.3t

独立高度 (Free Standing) : 53.7m

TOWER CRANE

QTD 160t · m

GL30/23






塔身 (Mast) : L69R □ 2mx2m

30m-55m

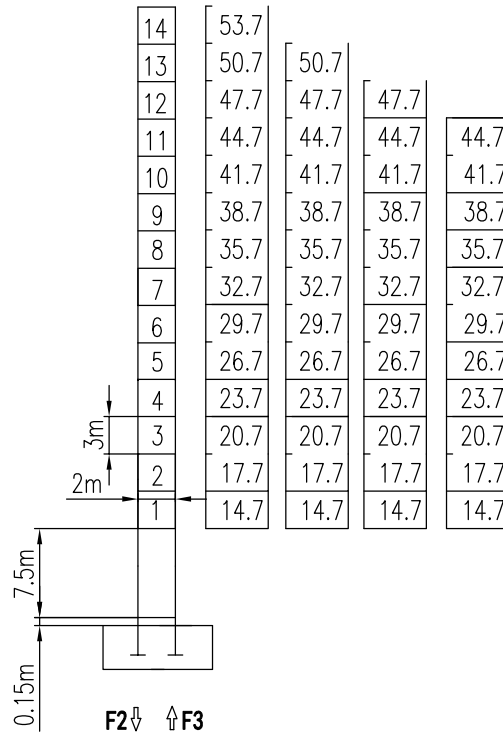30m-35m 40m-45m 50m 55m



F2 ↓ 233t    ↑ 286t

F3 • 175    ■ 229t

85t

载荷特性 Load diagrams

55m	4.2 →	18	20	22	25	27	30	32	35	37	40	42	45	47	50	52	55	m
		12	10	8.7	7.5	6.8	6.0	5.5	4.9	4.5	4.1	3.8	3.5	3.2	2.7	2.45	2.3	t
		6.0 5.5 5.0 4.5 4.1 3.8 3.5 3.2 2.7 2.45 2.3 t																
50m	3.8 →	18	20	22	25	27	30	32	35	37	40	42	45	47	50	m		
		12	10	8.7	7.5	6.8	6.0	5.5	4.9	4.5	4.1	3.8	3.5	3.2	3.0	t		
		6.0 5.5 5.0 4.5 4.1 3.8 3.5 3.2 3.0 t																
45m	3.5 →	18	20	22	25	27	30	32	35	40	42	45	m					
		12	10	9	7.7	7.0	6.2	5.7	5.1	4.7	4.2	4.0	3.6	t				
		6.0 5.7 5.0 4.7 4.2 4.0 3.6 t																
40m	3.2 →	18	20	22	25	27	30	32	35	37	40	m						
		12	10	9.1	7.8	7.1	6.2	5.7	5.1	4.8	4.3	t						
		6.0 5.7 5.1 4.8 4.3 t																
35m	2.9 →	18	20	22	25	27	30	32	35	m								
		12	10	9.2	8.0	7.2	6.4	5.9	5.3	t								
		6.0 5.3 t																
30m	2.5 →	18	20	22	25	27	30	m										
		12	10	9.4	8.1	7.3	6.5	t										
		6.0 t																

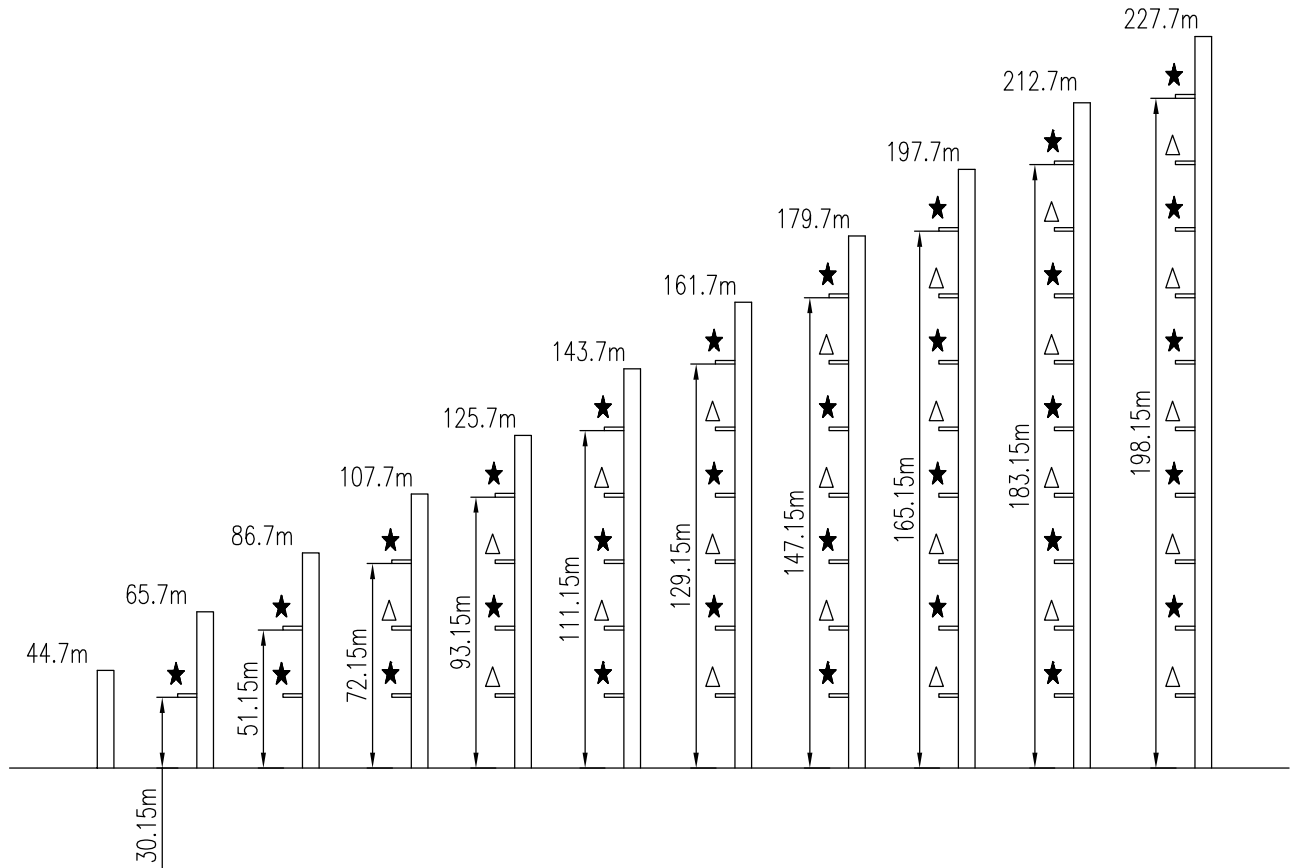


固定式附着高度 Anchoring height of stationary crane

★ 紧固附着框 Anchorages tightened



△ 放松附着框 Anchorages released

如需达到更高的高度, 请与我们联系。For greater heights, consult us.



内爬塔机 Climbing crane









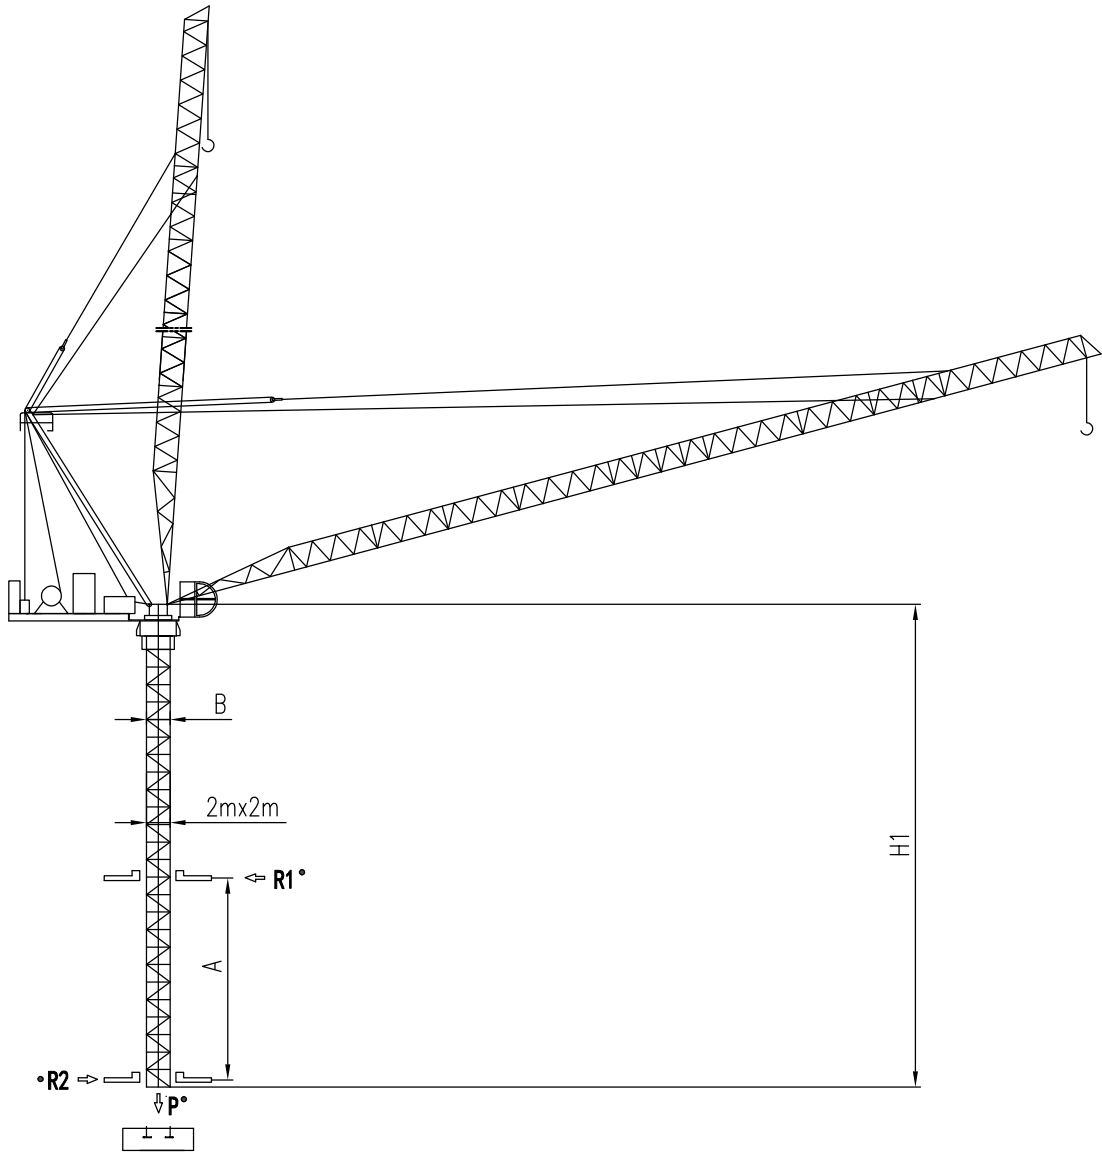
塔身 (Mast) : L69R □ 2mx2m











	L69R
A	12m-15m
B	2.0m
C	3.0m
D	2.2m
H1	37m
R1°	41t
R2°	37t
P°	141t

● 工作状态无系数  
In service without coefficient

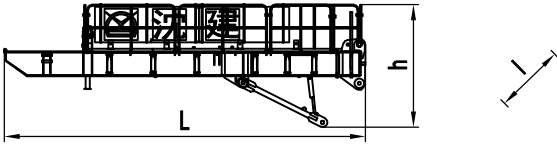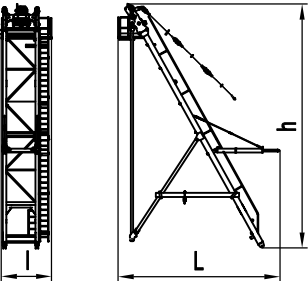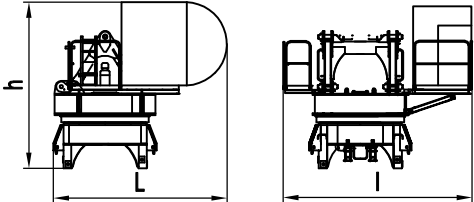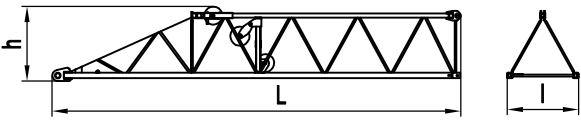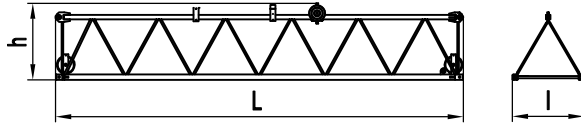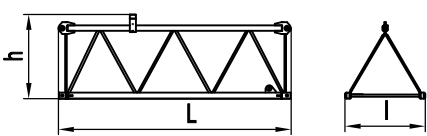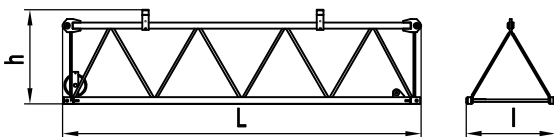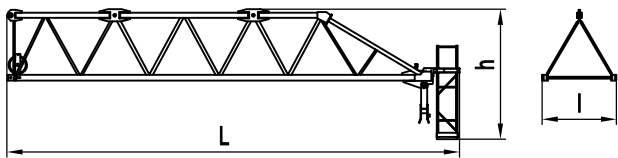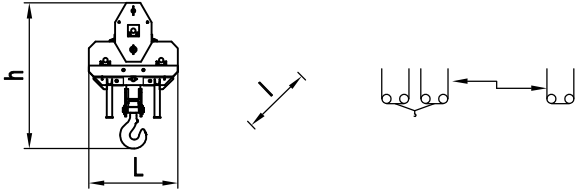外形尺寸重量表 Dimensions weights

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
平衡臂 Counter-jib		8.7	4	2.95	7846
塔头 Cat-head		7.1	2.48	11.8	5776
回转机构 Slewing mechanism		3.8	4.6	4	11251
起重臂节 Jib section		10.23	1.79	1.87	1708
起重臂节 Jib section		10.2	1.79	1.95	1460
起重臂节 Jib section		5.2	1.79	1.89	760
起重臂节 Jib section		7.2	1.79	1.89	995
起重臂节 Jib section		10.9	1.82	3.15	2025
吊钩滑轮组 Hook assembly		1.34	0.83	2.2	909

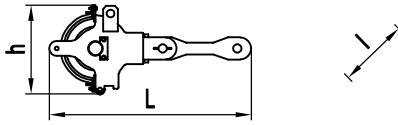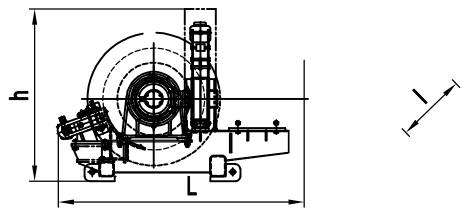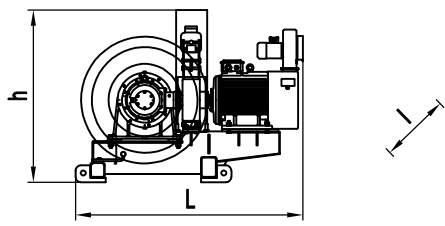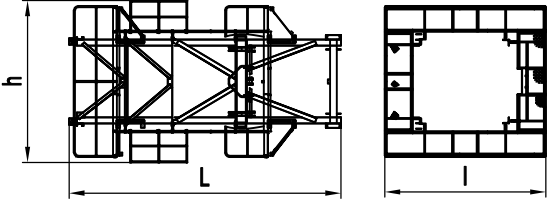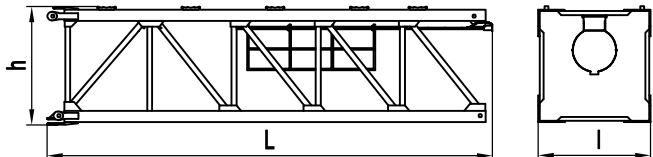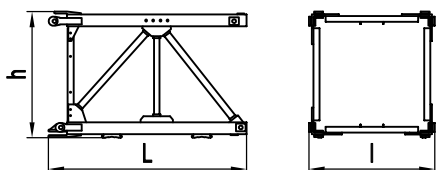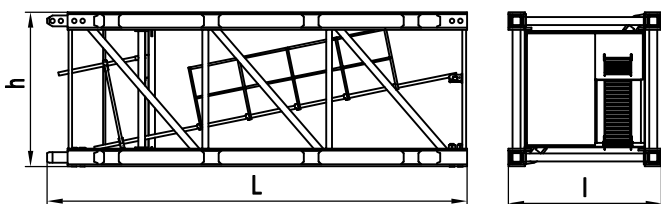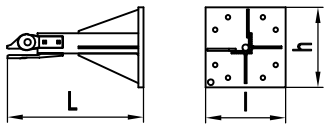塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
变幅滑轮组 Luffing pulley block		1.4	0.5	0.6	230
变幅机构 Luffing mechanism		2.5	1.9	1.7	3190
起升机构 Hoisting mechanism		2.2	2.2	1.8	3000
顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg
顶升套架 Telescopic cage		7.26	4.3	4.4	5810
塔身部分 Mast		L(m)	l(m)	h(m)	Kg
基础节 Basic mast		7.95	2.1	2.11	5120
标准节 Standard mast		3.31	2.1	2.11	2260
H 标准节 Standard mast		6.305	2.3	2.315	6270
固定支脚 Fixing angles		1.37	0.8	0.8	470

机构特性 Mechanisms specification															Kw
起升 Hoisting		55JLF30DY	m/min	0-5	0-21	0-42	0-63	0-84	0-2.5	0-10.5	0-21	0-31.5	0-42	740	55
			t	6	6	6	3	1.5	12	12	12	6	3	>740*	
变幅 Luffing		55JLF40A	min	0-3										55	
回转 Slewing		9SVF	r/min	0-0.8										9x2	
		145SVT		145Nm $\times$ 2											
行走 Travelling															



电源	Power Supply	380V 50Hz /440V 60Hz
KVA 供电容量	Necessary Electric Power	200KVA

- \* 同我们协商, Consult us
- \* 标准配置, Standard configuration

平衡臂配重  
Counter-jib ballast

		$\Delta$ (t)
55m	8.5m	23
50m	8.5m	19
45m	8.5m	17
40m	8.5m	14
35m	8.5m	12
30m	8.5m	12

可变换的其它安装方式  
Mounting possibilities



同我们协商  
Consult us

F 反力 Reactions	<ul style="list-style-type: none"> <li>• 工作状态 In service</li> <li>▪ 非工作状态 Out of service</li> </ul>	⊕ 自重 Self-load	不带载荷及配重, 最大臂长及标准高度时的自重. Without load and counter-weight with longest jib and standard height
-------------------	---	-------------------	---