




沈阳三洋建筑机械有限公司
SHENYANG SANYO BUILDING MACHINERY CO., LTD


TOWER CRANE QTP 145t · m
(R60/15)



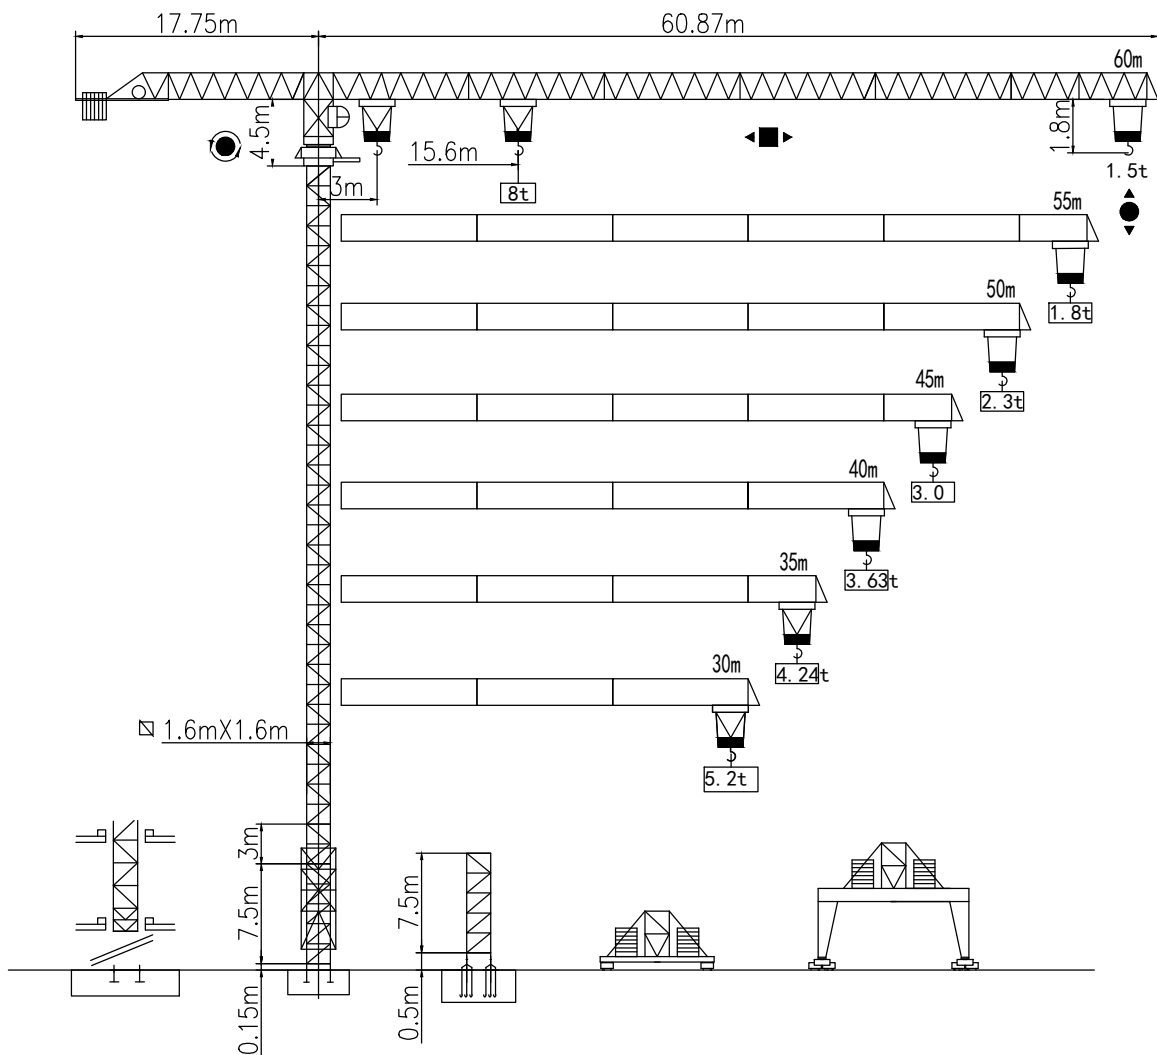

塔身截面 Mast 1.6m x 1.6m


60m

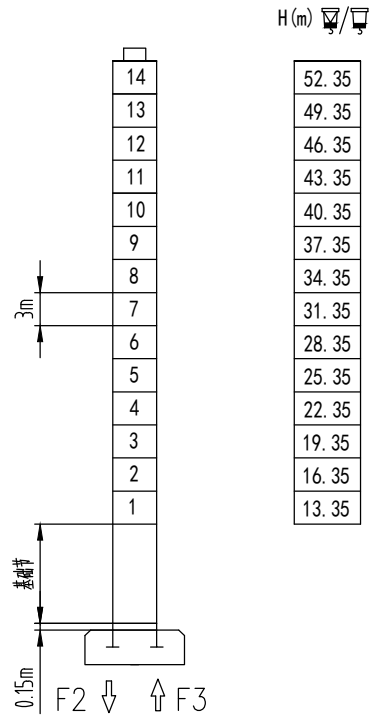

F2 ● 125t ■ 195t

F3 ● 84t ■ 195t

53t

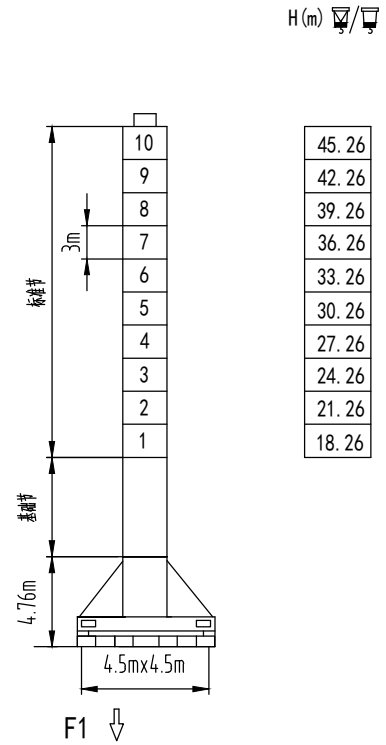

F1 ● 81t ■ 107t


57t

固定式附着高度 Anchoring height of stationary crane

★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released

如需达到更高的高度, 请与我们联系。For greater heights, consult us.

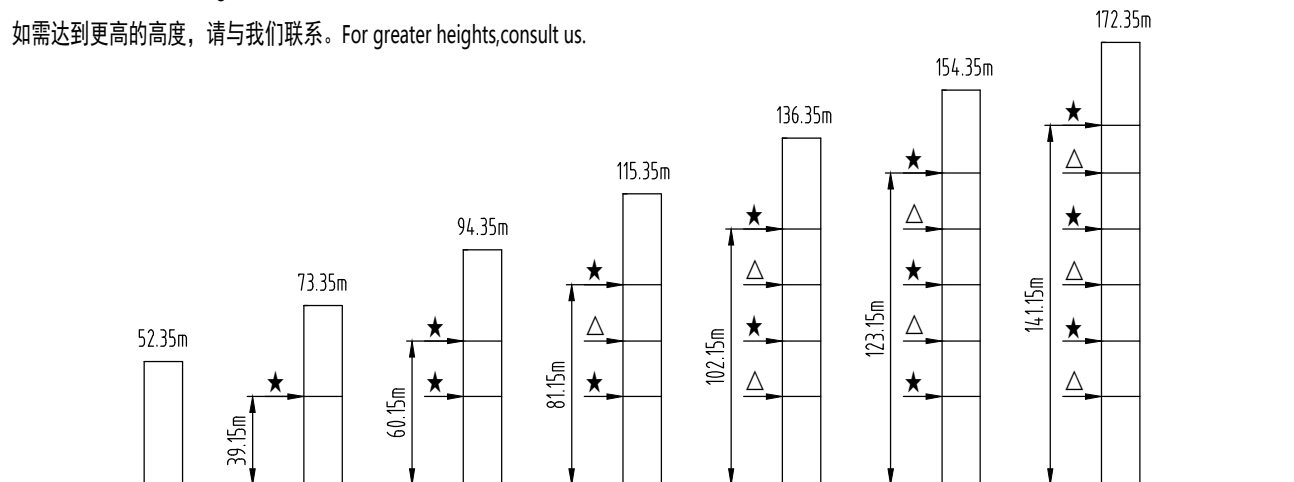

载荷特性 Load diagrams


60m	2.5-	16.8	20	25	30.1	35	40	45	50	55	60	m		
		8	6.50	4.95	3.91	3.20	2.66	2.24	1.91	1.64	1.41	t		
	2.5-						35	40	45	50	55	60	m	
							4.00	3.29	2.75	2.33	1.99	1.72	1.5	t
55m	2.5-	17.2	20	25	30	30.9	35	40	45	50	55	m		
		8	6.71	5.11	4.06	3.91	3.32	2.76	2.33	1.99	1.71	t		
	2.5-						35	40	45	50	55	m		
							4.00	3.40	2.85	2.42	2.08	1.80	t	
50m	2.5-	18.4	20	25	30	33.1	35	40	45	50		m		
		8	7.27	5.56	4.43	3.93	3.64	3.04	2.58	2.21		t		
	2.5-						35	40	45	50		m		
							4.0	3.72	3.12	2.66	2.30		t	
45m	2.5-	20	25	30	35	36	40	45				m		
		8	6.17	4.94	4.06	3.92	3.41	2.91				t		
	2.5-						36	40	45			m		
							4.0	3.50	3.00			t		
40m	2.5-	20.6	25	30	35	37	40					m		
		8	6.37	5.11	4.21	3.95	3.54					t		
	2.5-						37	40				m		
							4.0	3.63				t		
35m	2.5-	20.7	25	30	35							m		
		8	6.41	5.14	4.24							t		
	2.5-						35					m		
							4.0					t		
30m	2.5-	20.9	25	30								m		
		8	6.48	5.20								t		
	2.5-						30					m		
							4.0					t		

标准小车










标准小车可使用 2/4 倍率绳 standard trolley 2/4 fall.










使用四倍率时, 应从二倍率的载荷中减去 0.09t



When using 4x fall, subtract 0.09t from the loads

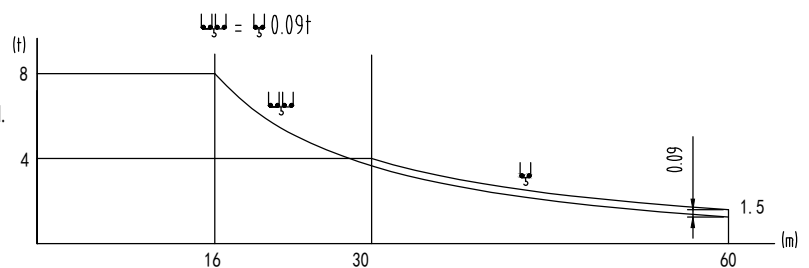



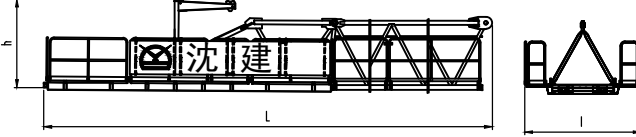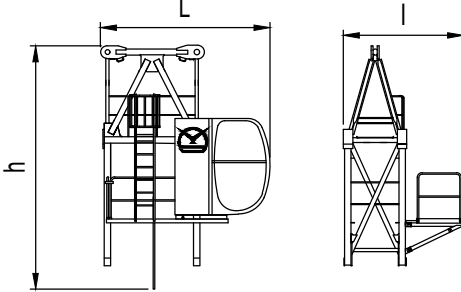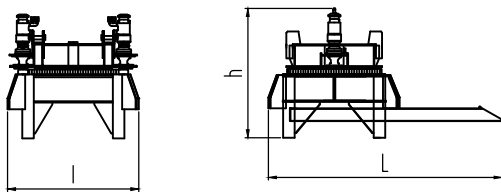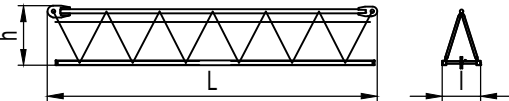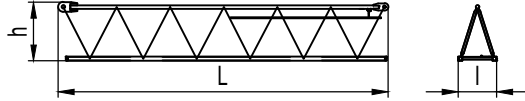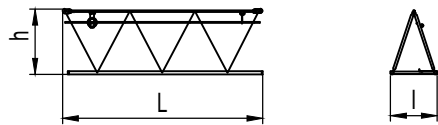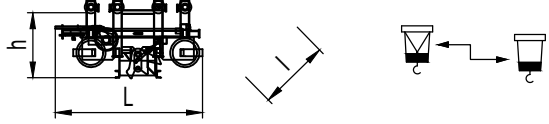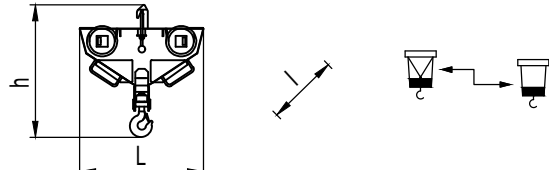

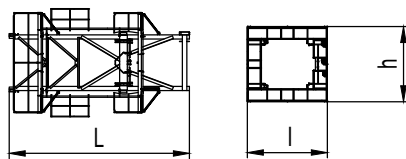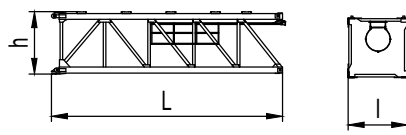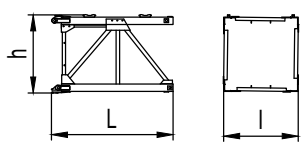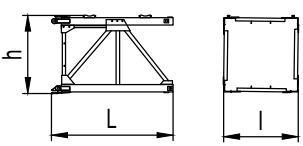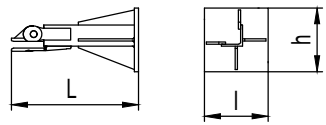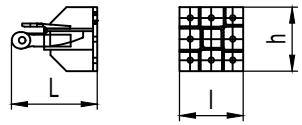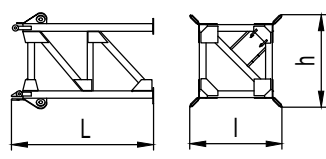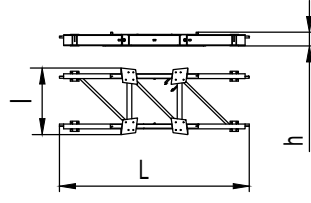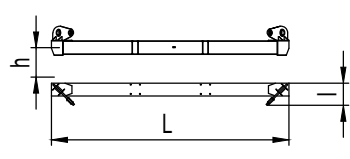

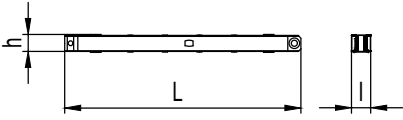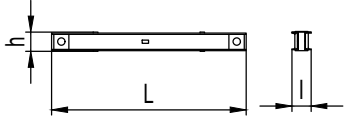

外形尺寸重量表 Dimensions weights

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
平衡臂 Counter-jib		17.354	2.878	2.253	5399
塔头 Cat-head		3.75	4.3	4.5	2742
回转机构 Slewing mechanism		4.343	2.057	2.29	3865.3
起重臂节 Jib section		10.342	1.2	1.866	3653
起重臂节 Jib section		10.277	1.2	1.825	2357
起重臂节 Jib section		10.23	1.2	1.775	1778
		10.175	1.2	1.745	1305
		10.15	1.2	1.73	1080
起重臂节 Jib section		5.115	1.2	1.67	378
		5.115	1.2	1.67	349
变幅小车 Trolley		1.6625	1.378	0.87	394
吊钩滑轮组 Hook assembly		1.348	1.58	1.189	292

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
顶升装置 Telescoping equipment					
顶升套架 Telescopic cage		6.785	3.624	3.634	3495
基础节 Basic mast		7.735	1.67	1.668	3534
整体过渡节 Transition mast		3.235	1.6	1.67	1038
标准节 Standard mast		3.241	1.6	1.668	1180
底部 Base					
固定支脚 Fixing angles		1.2	0.6	0.6	295
固定支脚 Fixing angles		0.87	0.6	0.6	325
底架塔节 Chassis mast		3.72	2.00	2.00	2240
底架纵梁 Side member		6.32	2.08	0.54	1200
底架横梁 Traverse		4.88	0.467	0.705	1110

底部 Base	L(m)	l(m)	h(m)	Kg	
底架撑杆 Brace rod		3.86	0.27	0.28	350
底架水平杆 Horizontal member		1.66	0.17	0.12	65

机构特性 Mechanisms specification														 m	kw
起升 Hoisting		37YFL20B	m/min	0-5	0-20	0-40	0-61	0-82	0-2.5	0-10	0-20	0-30.5	0-41	490 >490 [★]	37
			t	4	4	4	2	1	8	8	8	4	2		
变幅 Trolleying		4JXF4	m/min	0-55											4
		4T3V4	m/min	7.2-30-60											
回转 Slewing		5.5SVF	r/min	0-0.8											5.5x2
		95SVT		95Nm x 2											
行走 Travelling		4TRVF	m/min	0-12											4x4
 电源	Power Supply			380V 50Hz / 440V 60Hz											
KVA 供电容量	Necessary Electric Power			60KVA											
★ 同我们协商, Consult us ★ 标准配置, Standard configuration															