

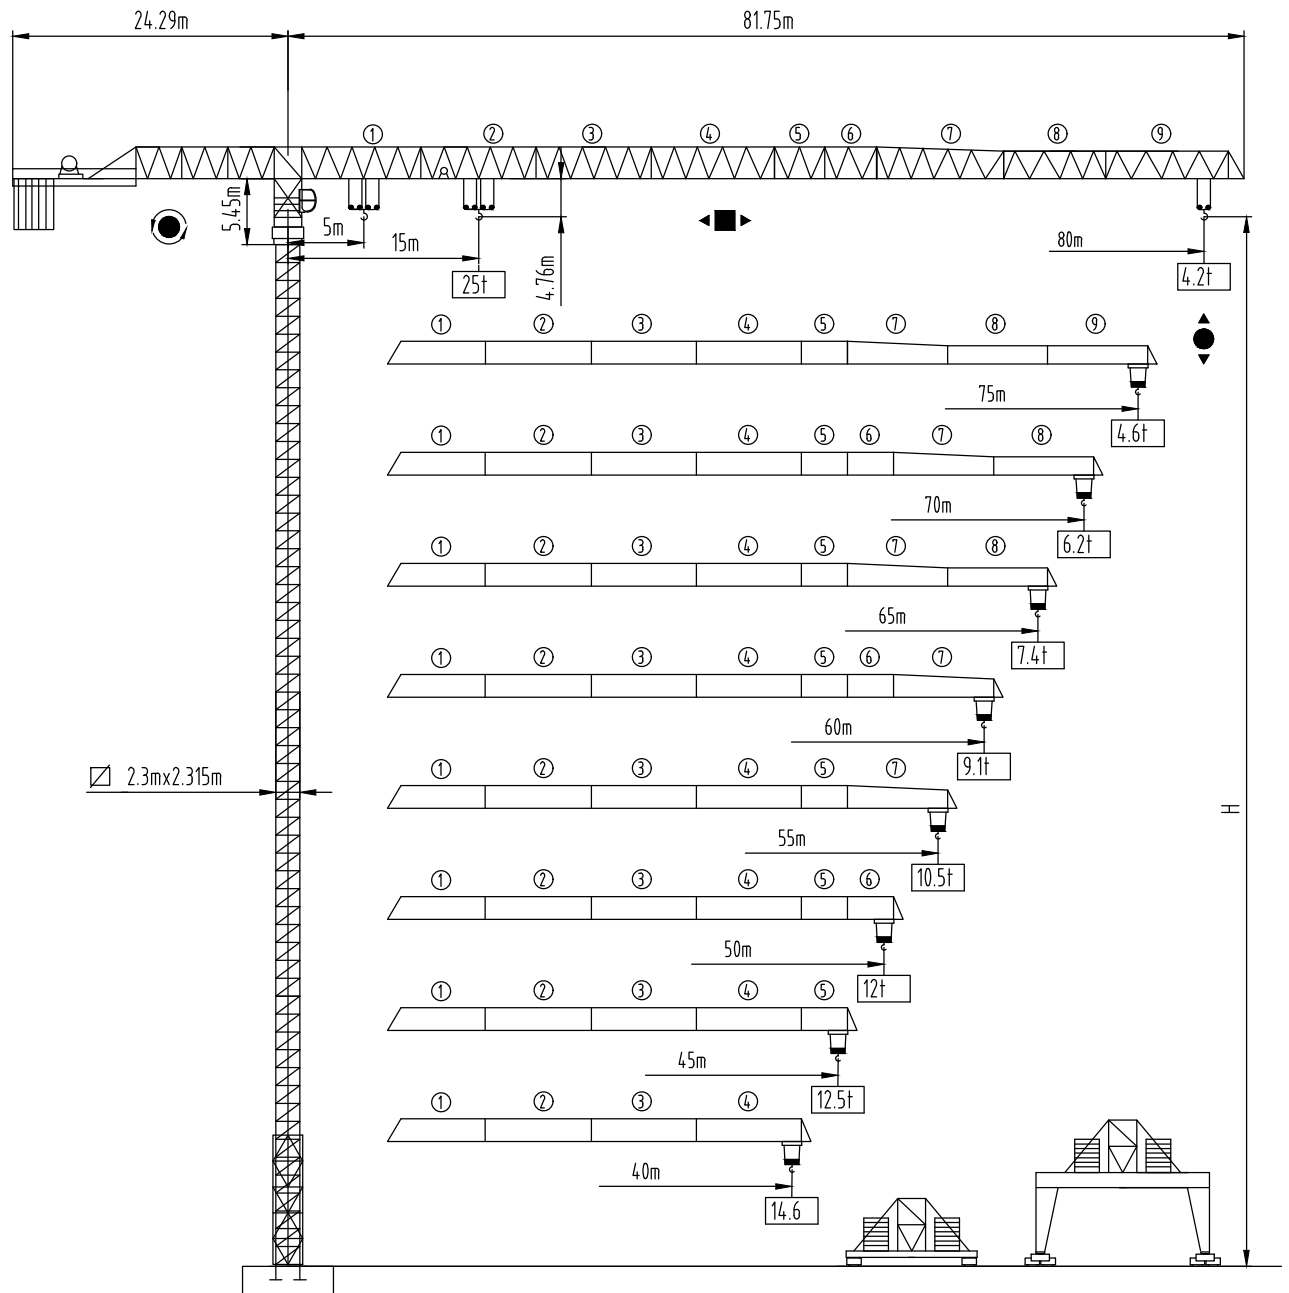


沈阳三洋建筑机械有限公司

SHENYANG SANYO BUILDING MACHINERY CO., LTD

最大载荷 (Max Load) : 25t
 臂长幅度 (Jib) : 80m
 臂端吊载 (Tip Load) : 4.2t
 独立高度 (Free Standing) : 79m


TOWER CRANE QTP 600t · m
 (R80/42)





塔身(Mast) □ 2.3mx2.315m

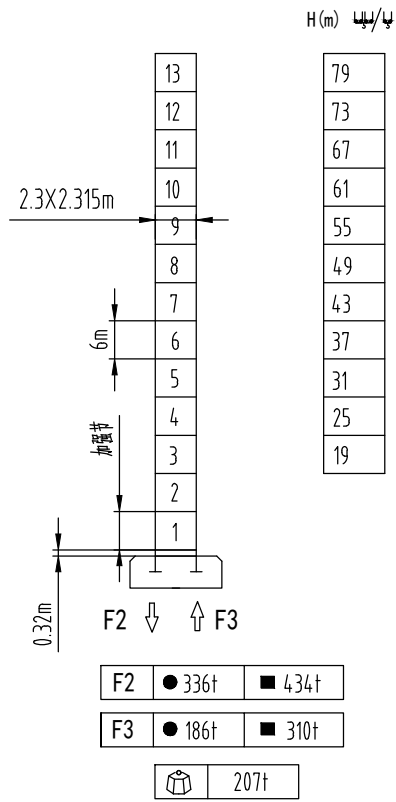▲▲▲▲ 40m-80m




固定式附着高度 Anchoring height of stationary crane


★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released

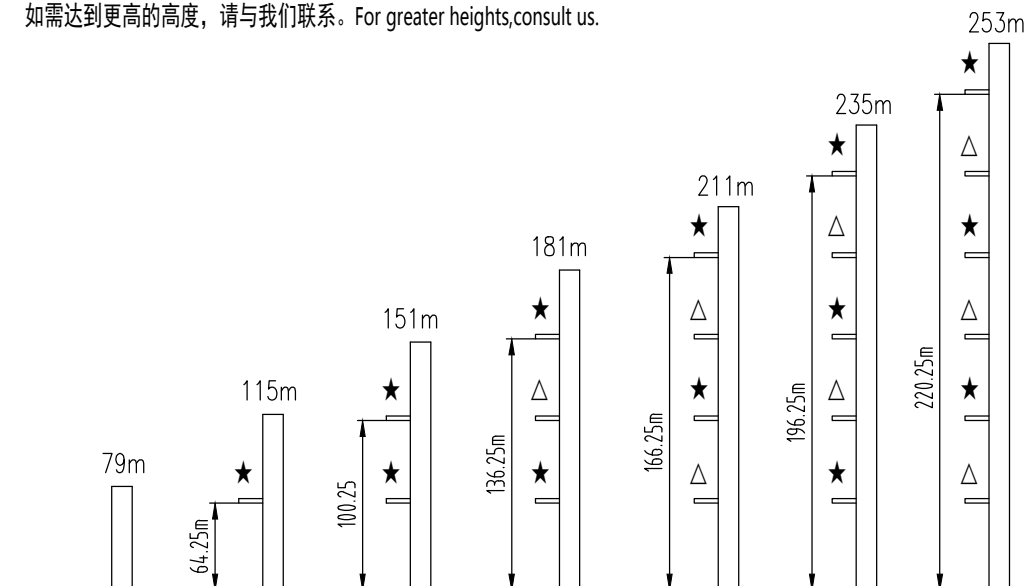如需达到更高的高度, 请与我们联系。For greater heights, consult us.




载荷特性 Load diagrams

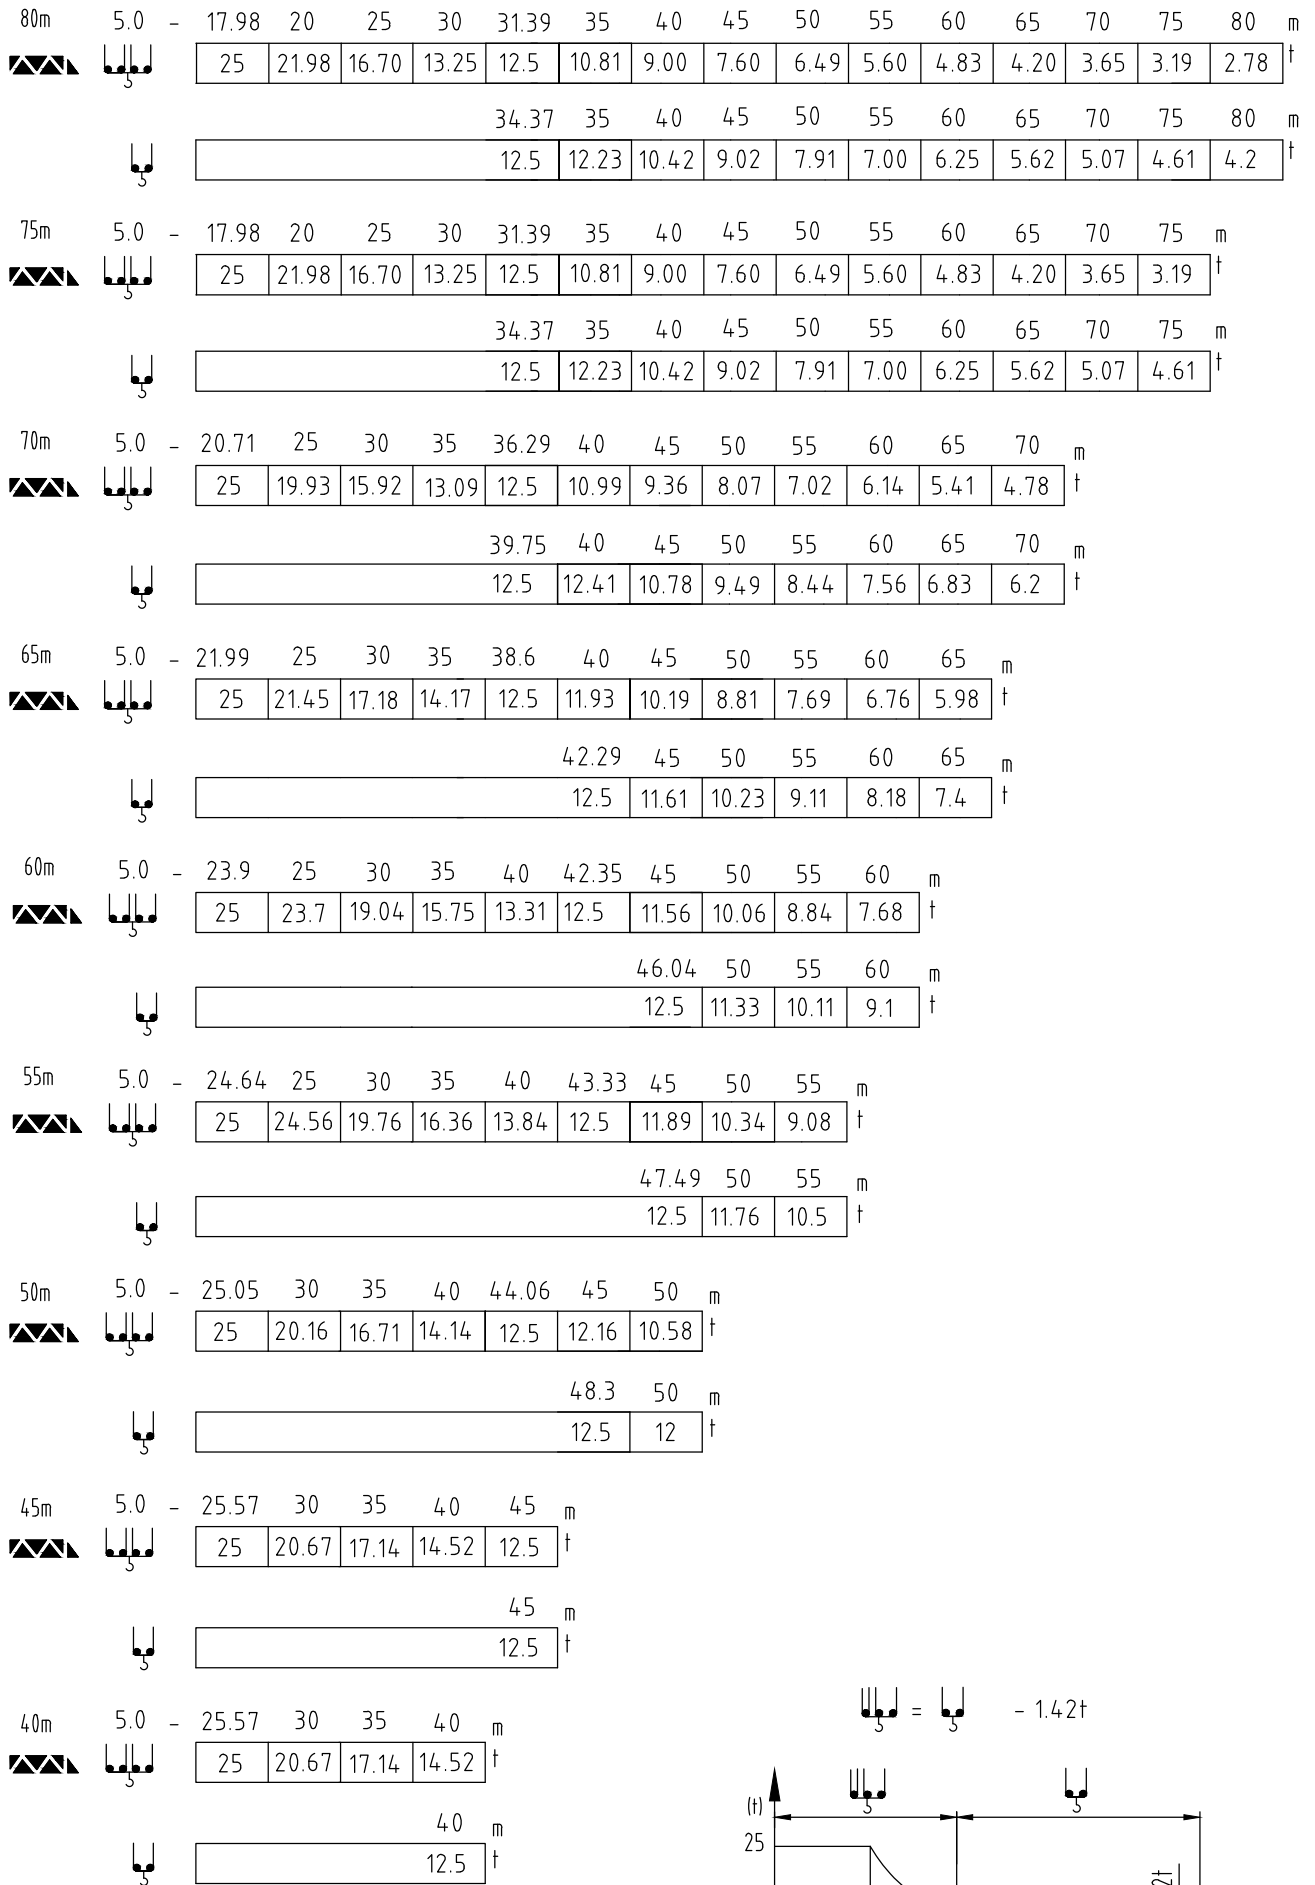












标准小车可使用 2/4 倍率绳 standard trolley 2/4 fall.





使用四倍率时, 应从二倍率的载荷中减去 1.42 吨

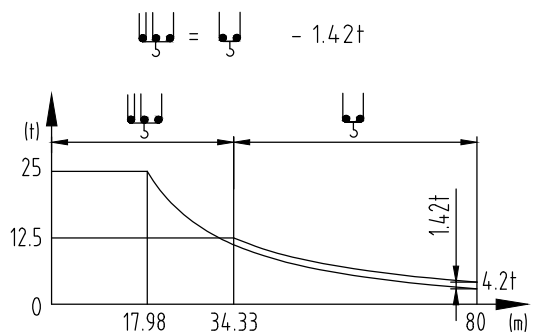When using $\frac{2}{4}$ subtract 1.4t from the loads $\frac{2}{2}$



外形尺寸重量表 Dimensions weights

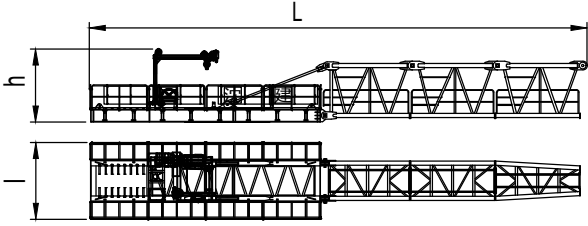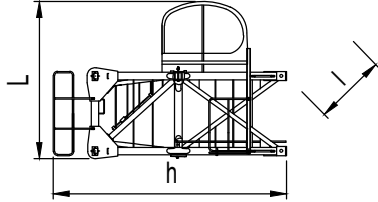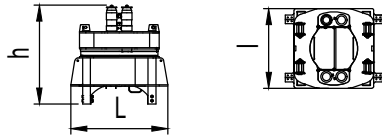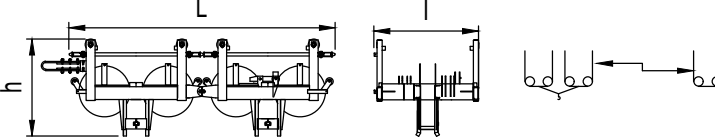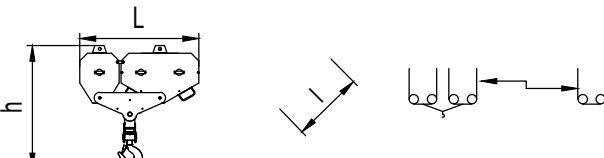塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
平衡臂 Counter-jib		23.4	3.62	3.43	21122
塔头 Cat-head		4.16	4.41	6.58	9190
回转机构 Slewing mechanism		3.05	2.5	3.2	12766
起重臂节 Jib section		10.56	1.4	2.85	10030
起重臂节 Jib section		10.46	1.4	2.72	7565
起重臂节 Jib section		10.42 10.36	1.4	2.7 2.63	5102 3845
起重臂节 Jib section		5.35 5.34	1.4	2.57 2.57	1788 1635
起重臂节 Jib section		10.29	1.4	2.55	2290
起重臂节 Jib section		10.26 10.26	1.4	1.8 1.77	1713 1103
变幅小车 Trolley		3.98	1.72	1.45	1225
吊钩滑轮组 Hook assembly		2.63	0.18	2.73	1025

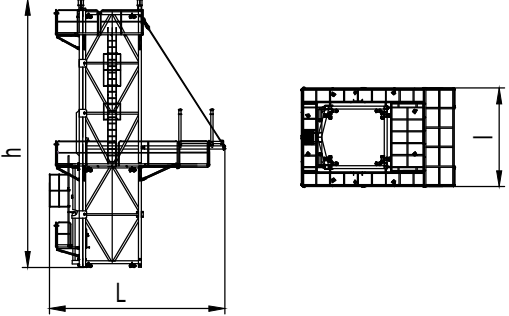顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg
顶升套架 Telescopic cage		8.3	5	12.6	16700
塔身部分 Mast		L(m)	l(m)	h(m)	Kg
加强节 Reinforcing mast		6.31	2.3	2.32	8200
标准节 Standard mast		6.31	2.3	2.32	6270
底部 Base		L(m)	l(m)	h(m)	Kg
固定支脚 Fixing angles		2.61	0.78	0.78	905

机构特性 Mechanisms specification														Kw	
起升 Hoisting		90LFV63Y ★	m/min	0-3.6	0-18	0-36	0-54	0-72	0-18	0-9	0-18	0-27	0-36	800	90
		†	t	12.5	12.5	12.5	6.25	3.125	25	25	25	12.5	6.25	>800★	
变幅 Trolleying		15TVF	m/min	0-45										15	
回转 Slewing		7.5SVF	r/min	0-0.6										7.5x3	
		145SVT		145Nm x3											
行走 Travelling		5.2TRVF	m/min	0-15										5.2x6	
电源		Power Supply		380V 50Hz / 440V 60Hz											
KVA 供电容量		Necessary Electric Power		200KVA											



★ 同我们协商, Consult us

★ 标准配置, Standard configuration

平衡臂配重
Counter-jib ballast

80m	24.29m	38
75m	24.29m	33.1
70m	24.29m	35.65
65m	24.29m	32.15
60m	24.29m	32.6
55m	24.29m	28.95
50m	24.29m	27.4
45m	24.29m	24.2
40m	24.29m	20.7

可变换的其它安装方式
Mounting possibilities



同我们协商
Consult us

F 反力
Reactions

● 工作状态 In service
■ 非工作状态 Out of service

⊕ 自重
Self-load

不带载荷及配重, 最大臂长及标准高度时的自重。
Without load and counter-weight with longest jib and standard height