




沈阳三洋建筑机械有限公司  
SHENYANG SANYO BUILDING MACHINERY CO., LTD



TOWER CRANE QTZ型1200tm  
(S1200K50)



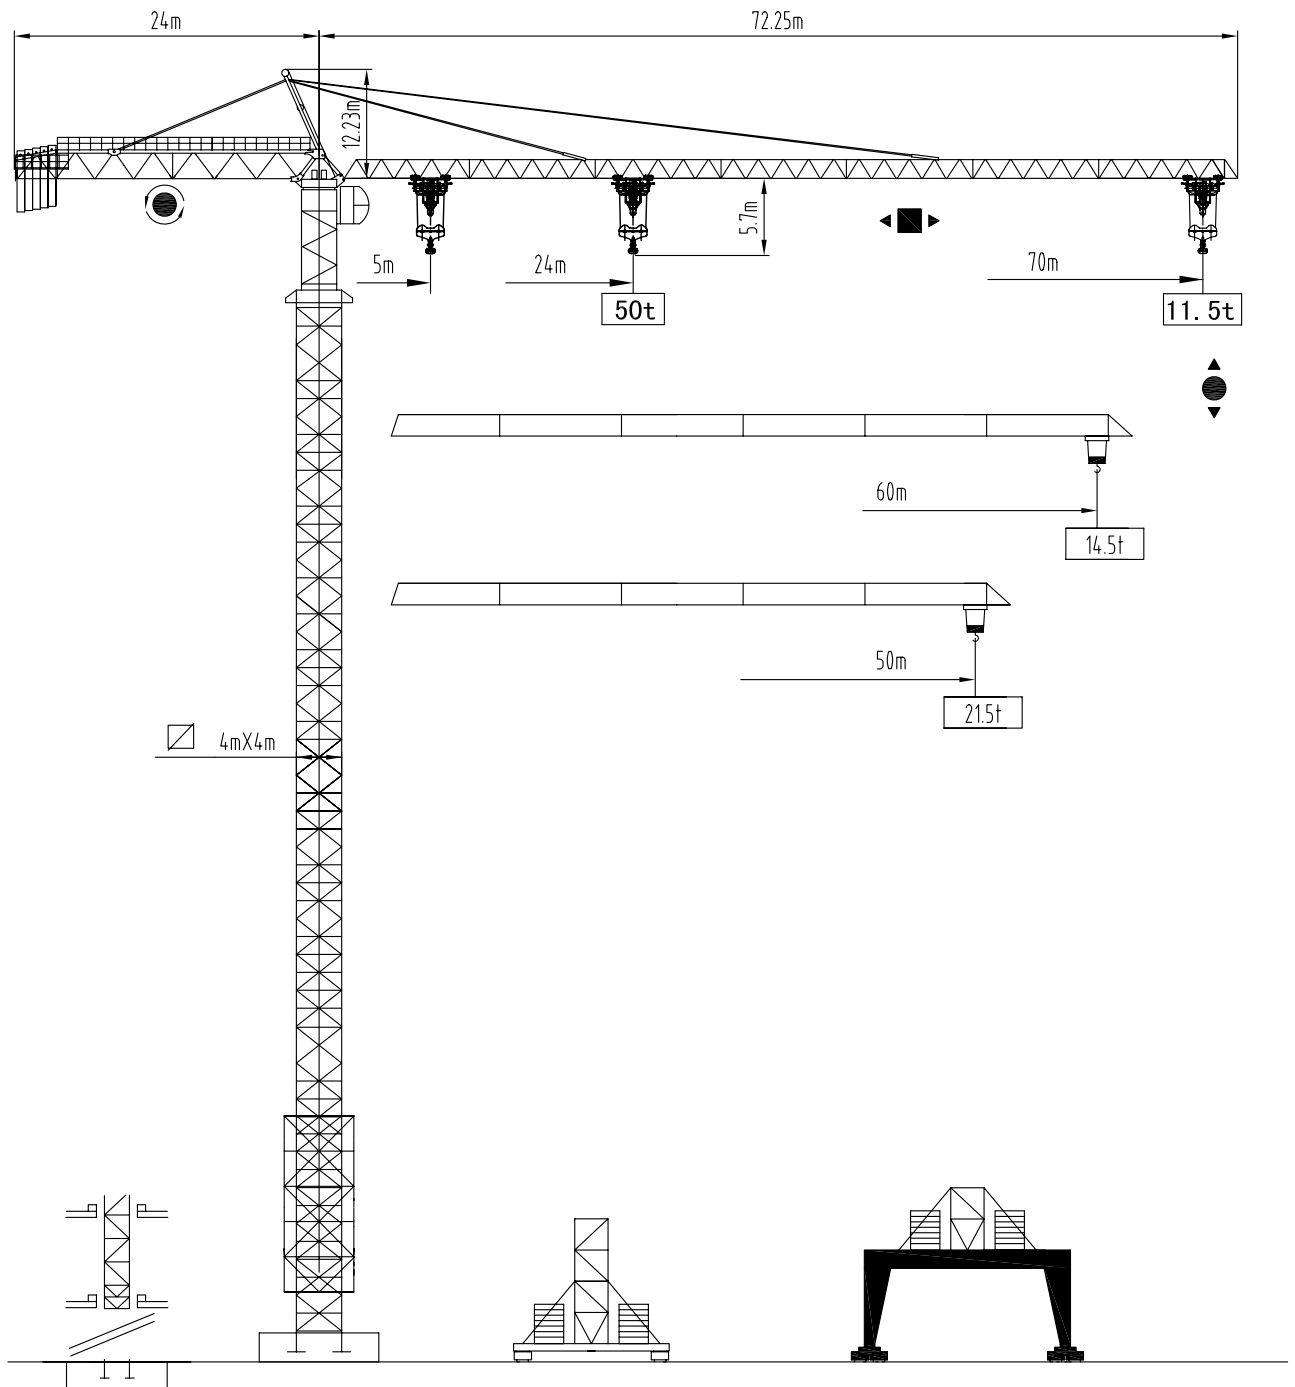

塔身截面 Mast □ 4m×4m

50-70m

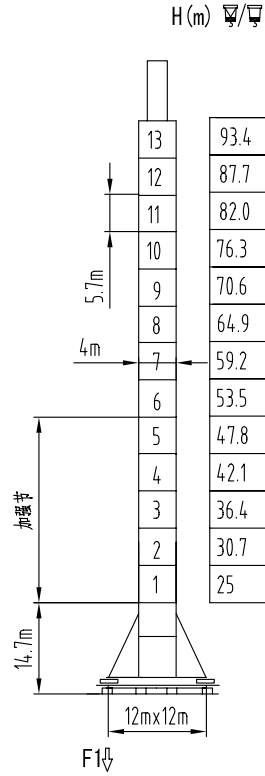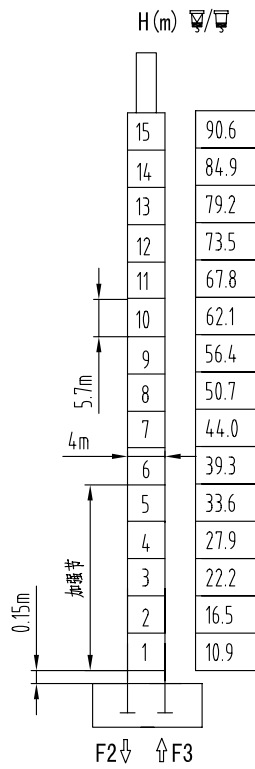

F2	• 352t	▪ 368t
F3	• 113t	▪ 153t
🏗️	363t	


F1	• 266t	▪ 238t
🏗️	401t	

固定式附着高度 Anchoring height of stationary crane




★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released

如需达到更高的高度, 请与我们联系。For greater heights, consult us.

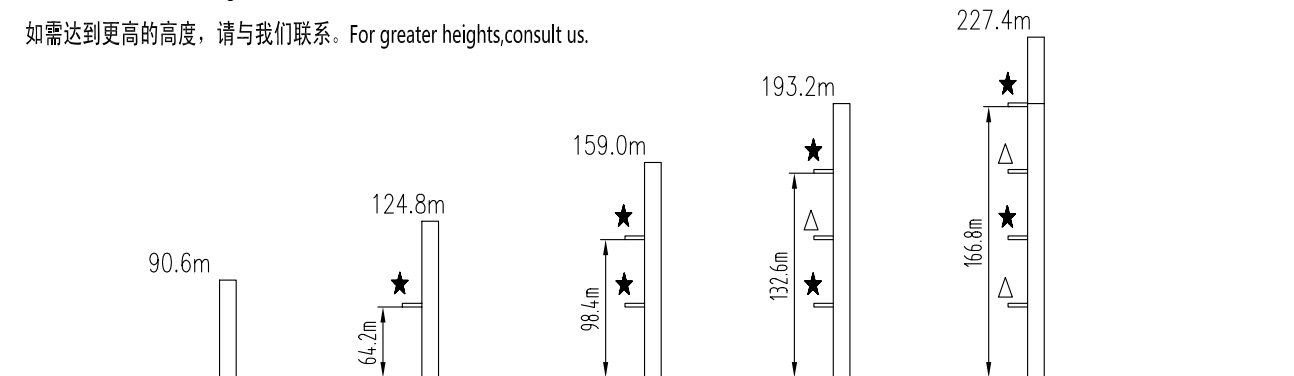

### 载荷特性 Load diagrams

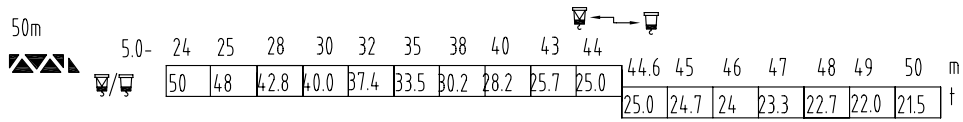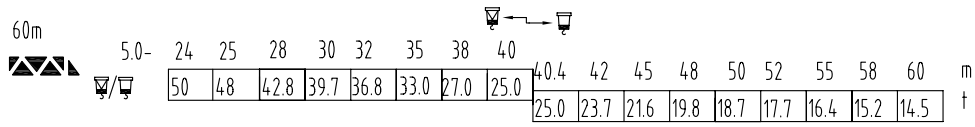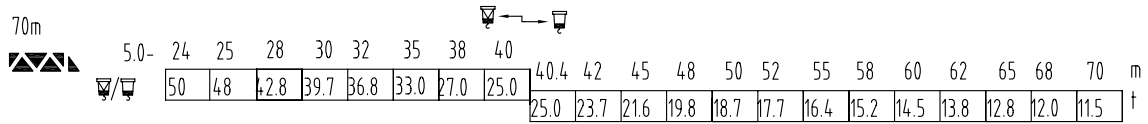


$$\zeta = \zeta - 1.0t$$










标准小车可使用 2/4 倍率绳 standard trolley 2/4 fall.









使用四倍率时, 应从二倍率的载荷中减去 1.0 吨






When using  $\zeta$  subtract 1.0t from the loads  $\zeta$

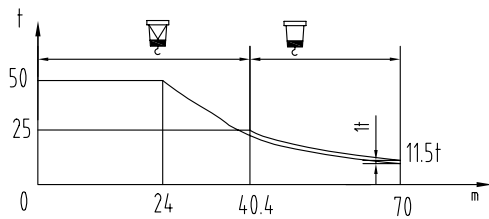



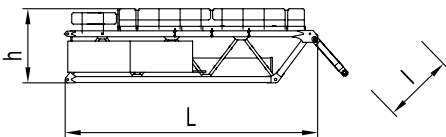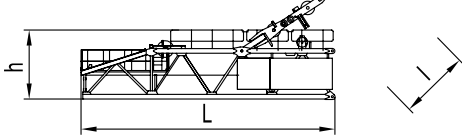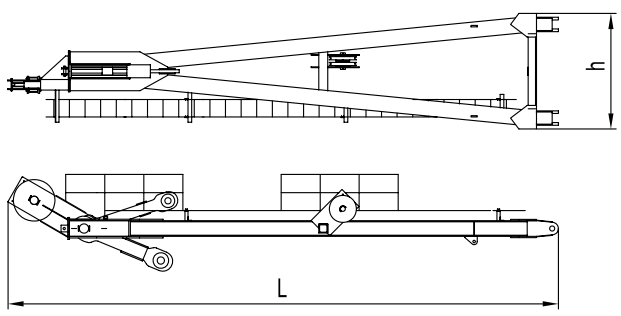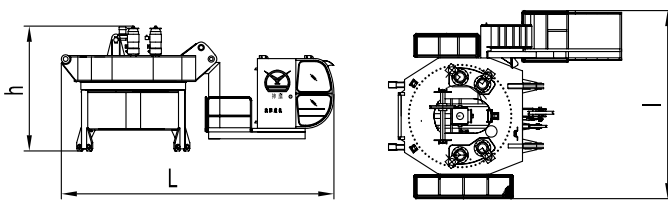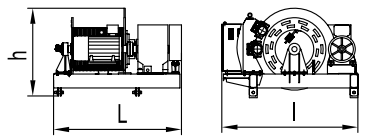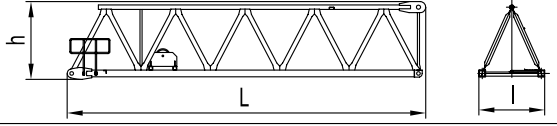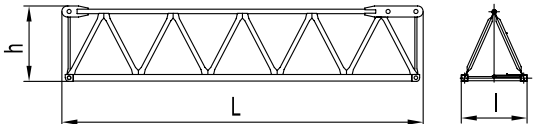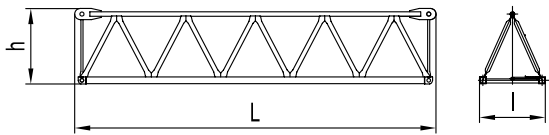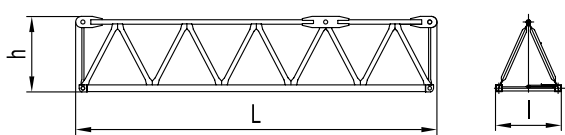

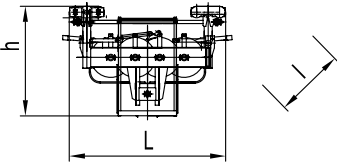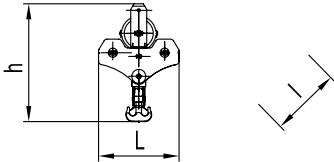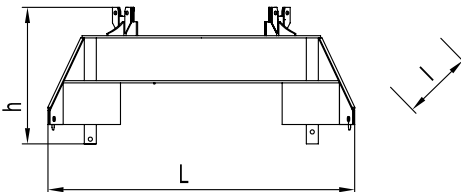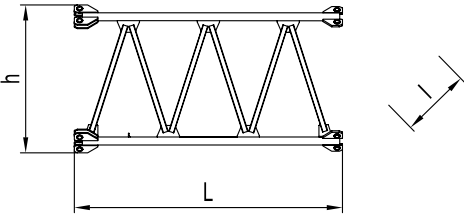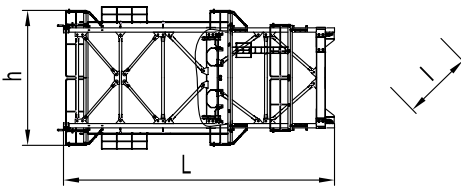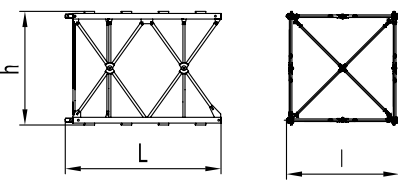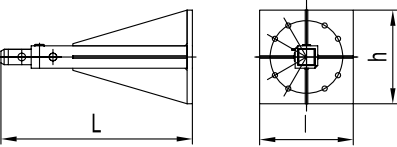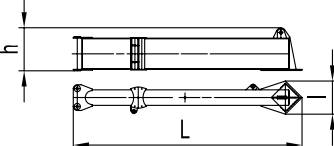

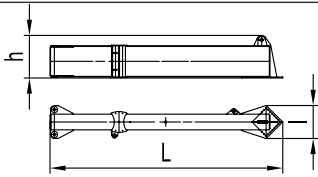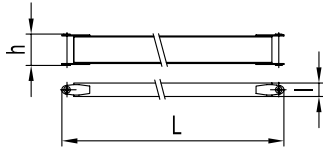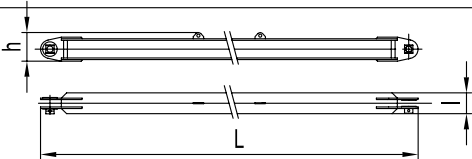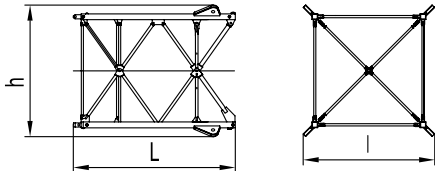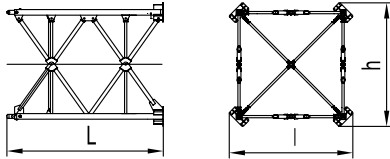
外形尺寸重量表 Dimensions weights

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg	
平衡臂根节 Counter-jib foot		12.505	3.98	3.760	17422	
平衡臂端节 Counter-jib nose		12.205	2.685	3.760	14264	
塔头 Cat-head		10.6	1.80	2.222	5050	
回转机构 Slewing mechanism		7.862	5.43	5.421	29743	
起升机构 Hoisting mechanism		3.067	3.332	2.195	15574	
起重臂节 Jib section	 1	10.24	1.90	2.198	5357	
起重臂节 Jib section	 2	10.42	1.90	2.18	5052	
起重臂节 Jib section		3	10.42	1.90	2.198	5210
		4	10.42	1.90	2.198	4511
		6	10.420	1.90	2.158	3320
		7	10.365	1.90	2.111	2744
起重臂节 Jib section	 5	10.42	1.90	2.158	4237	




塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
变幅小车 Trolley		3.310	2.456	2.225	2999
吊钩滑轮组 Hook assembly		1.884	0.387	2.26	1616
十字梁 Cross-beam		5.47	4.97	2.47	18420
过渡节 Transition mast		6.04	3.35	3.35	7586
顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg
套架 Telescopic cage		13.55	7.210	6.745	32080
塔身部分 Mast		L(m)	l(m)	h(m)	Kg
加强节 Reinforcing mast		5.990	4.336	4.336	8500
标准节 Standard mast		5.990	4.336	4.336	7300
底部 Base		L(m)	l(m)	h(m)	Kg
固定支脚 Fixing angles		1.79	0.900	0.900	780
底梁 I Girder I		8.792	1.273	1.655	7144x2

底部 Base		L(m)	l(m)	h(m)	Kg
底梁 II Girder II		8.947	1.273	1.640	7515x2
拉杆 Tie rod		7.287	0.260	0.602	1418x4
斜撑杆 Oblique legs		8.615	0.400	0.550	2614x4
底架塔节1 Chassis-mast 1		5.990	4.865	4.865	10315
底架塔节2 Chassis-mast 2		6.010	4.749	4.749	10051



机构特性 Mechanisms specification														Kw	
起升 Hoisting		132LVF	m/min	0-2.8	0-12	0-24	0-36	0-48	0-14	0-6	0-12	0-18	0-24	1040	132
			t	25	25	25	12.5	6.25	50	50	50	25	12.5		
变幅 Trolleying		18.5TVF	m/min	0-30										18.5	
回转 Slewing		11SVF	r/min	0-0.6										11x4	
		155SVT		155Nm x 4											

 电源	Power Supply	380V 50Hz / 440V 60Hz
KVA 供电容量	Necessary Electric Power	300KVA

平衡臂配重  
Counter-jib ballast

		 (t)
70m	24m	68.4
60m	24m	60
50m	24m	51.6


可变换的其它安装方式  
Mounting possibilities



 同我们协商  
Consult us

F 反力  
Reactions

- 工作状态 In service
- 非工作状态 Out of service

 自重  
Self-load

不带载荷及配重, 最大臂长及标准高度时的自重.  
Without load and counter-weight with longest jib and standard height