
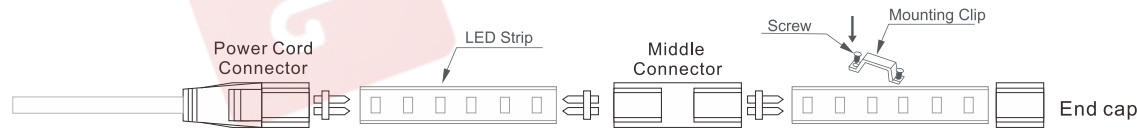


**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

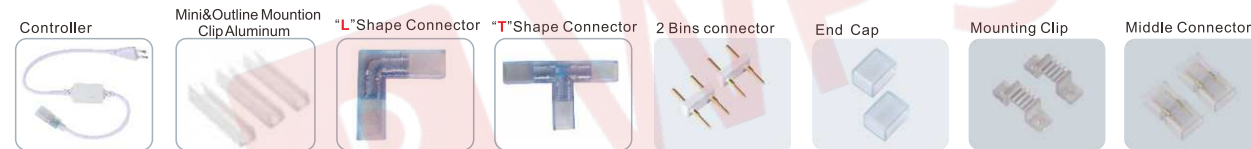

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Bean Angle	Cutting Intervals	CCT
AC110V	IP65	SMD5730	1Year	Yes	60+	120°	0.5M	W,NW,WW,R,G,B
AC220V	IP65	SMD5730	1Year	Yes	60+	120°	1M	W,NW,WW,R,G,B

**Product Type**


Item No:	Input Voltage	Array	Power/M	LM	LM/M	Dimension	100M Carton Size
5730-120D-8mm	AC220V/ AC110V	Single Line	7-8W	20-25lm	500lm	6*12.3mm	31*31*17.5cm
5730-120D-10mm	AC220V/ AC110V	Oblique Double Line	7-8W	20-25lm	500lm	6.2*14.2mm	31*31*19.5cm
5730-180D-12mm	AC220V/ AC110V	Stagger Line	8-9W	20-25lm	620lm	6.2*16.2mm	31*31*21.5cm
5730-180D-15mm	AC220V/ AC110V	Oblique Triple Line	8-9W	20-25lm	620lm	7.5*20mm	31*31*29.5cm
5730-276D-18mm	AC220V/ AC110V	Stagger Triple Line	10-12W	20-25lm	750lm	8.3*23.5mm	31*31*34.5cm



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

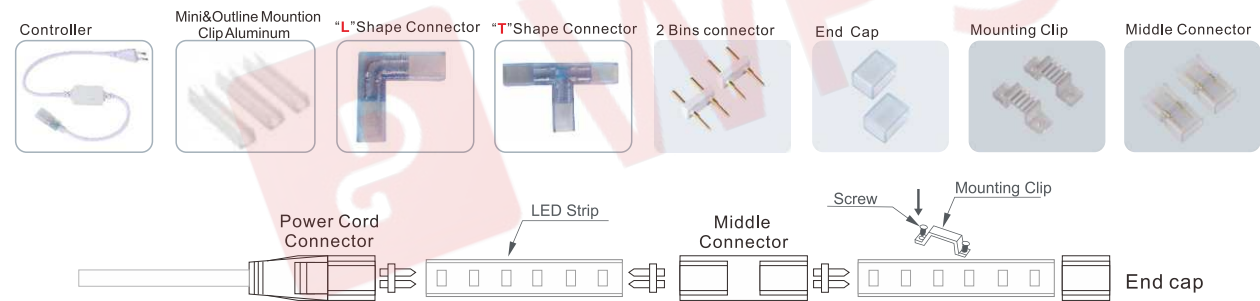

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V	IP65	SMD5050	2Years	Yes	80+	120°	0.5M	W,NW,WW,R,G,B
AC220V	IP65	SMD5050	2Years	Yes	80+	120°	1M	W,NW,WW,R,G,B

**Product Type**


Item No:	Input Voltage	Array	Power/M	LM	LM/M	Dimension	100M Carton Size
5050-60D-10mm	AC220V/ AC110V	Single Line	7-8W	16-18lm	400lm	7.5*15mm	31*31*24.5cm
5050-120D-12mm	AC220V/ AC110V	Double Line	10-11W	16-18lm	1030lm	7.5*17mm	31*31*29.5cm



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

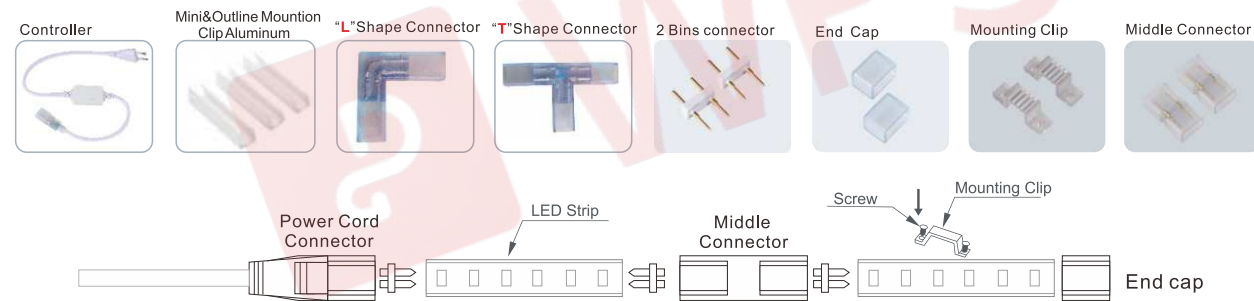

**PRODUCT FEATURES**




**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V	IP67	SMD2835	2 Years	Yes	80+	120°	0.5m	W,NW,WW,R,G,B
AC220V	IP67	SMD2835	2 Years	Yes	80+	120°	1m	W,NW,WW,R,G,B

**Product Type**



Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	LM/M	Dimension	100M Carton Size
2835-144D-8mm	AC220V/ AC110V	Single Line	8mm	144	8-9W	580lm		
2835-180D-12mm	AC220V/ AC110V	Double Line	12mm	180	10-12W	700lm		
2835-240D-15mm	AC220V/ AC110V	Double Line	12mm	240	14-15W	1050lm		
2835-276D-18mm	AC220V/ AC110V	Oblique Triple Line	18mm	276	18-19W	1450lm		

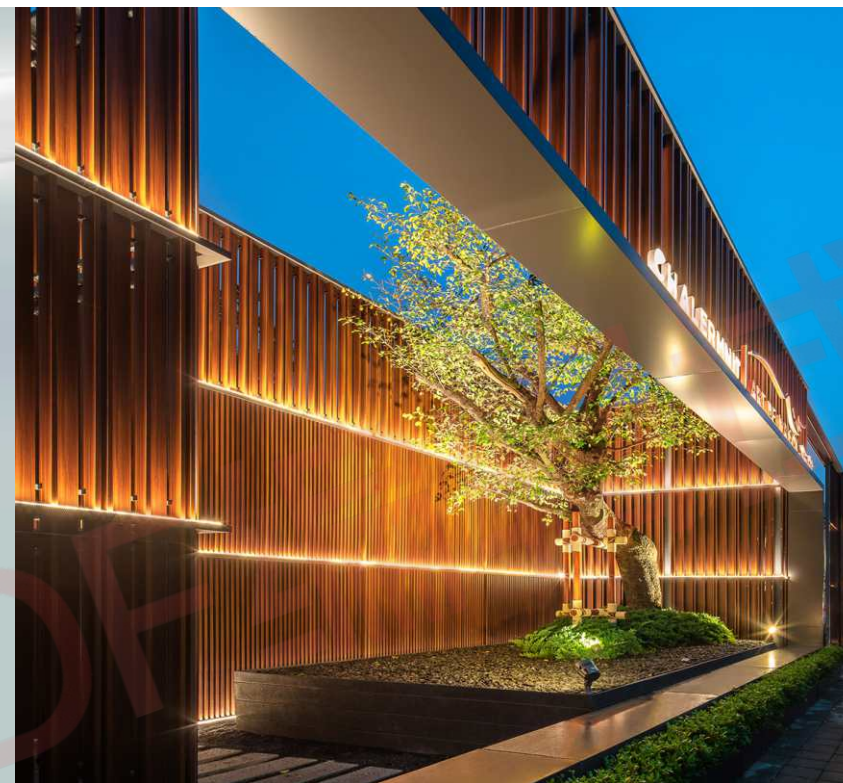

**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

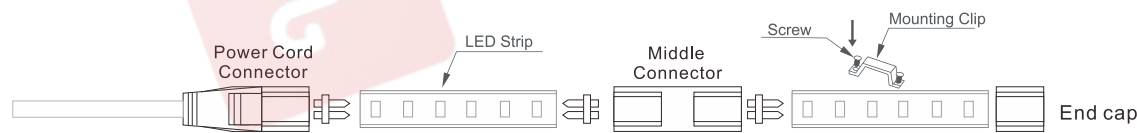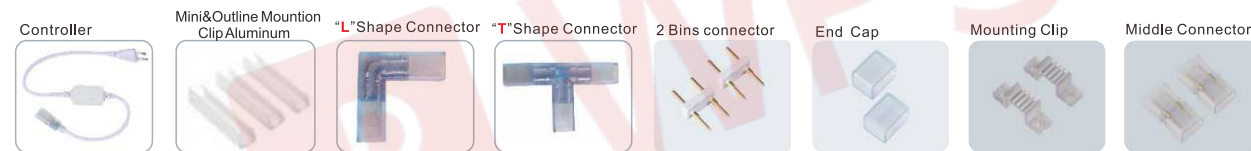

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V	IP67	SMD5730	2 Years	Yes	80+	120°	0.5m	W,NW,WW,R,G,B
AC220V	IP67	SMD5730	2 Years	Yes	80+	120°	1m	W,NW,WW,R,G,B

**Product Type**


Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	LM/M	Dimension	100M Carton Size
5730-120D-12mm	AC220V/ AC110V	Single Line	10mm	120	8-9W	500lm		
5730-120D-12mm	AC220V/ AC110V	Oblique Double Line	12mm	120	8-9W	500lm		
5730-180D-12mm	AC220V/ AC110V	Stagger Line	12mm	180	10-12W	650lm		
5730-180D-15mm	AC220V/ AC110V	Oblique Triple Line	15mm	180	10-12W	650lm		
5730-276D-18mm	AC220V/ AC110V	Stagger Triple Line	18mm	276	14-15W	1050lm		



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

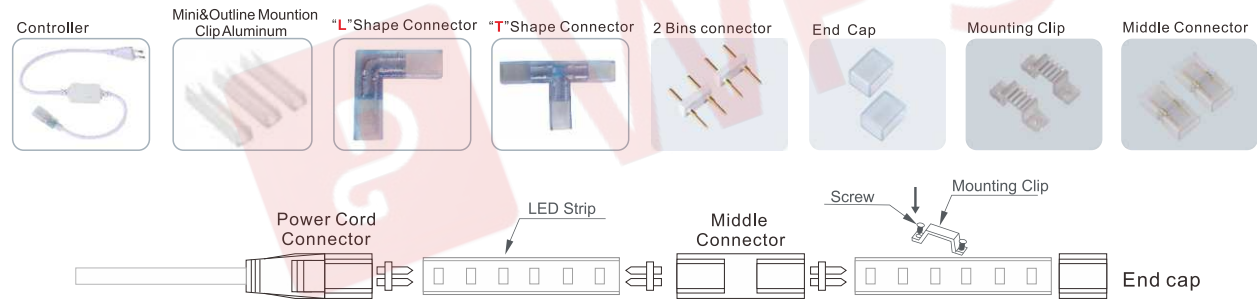

**PRODUCT FEATURES**




**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V	IP67	SMD5050	2 Years	Yes	80+	120°	0.5m	W,NW,WW,R,G,B
AC220V	IP67	SMD5050	2 Years	Yes	80+	120°	1m	W,NW,WW,R,G,B

**Product Type**


Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	LM/M	Dimension	100M Carton Size
5050-60D-10mm	AC220V/ AC110V	Single Line	10mm	60	8-9W	550lm		
5050-90D-12mm	AC220V/ AC110V	Single Line	12mm	90	10-12W	680lm		
5050-120D-12mm	AC220V/ AC110V	Double Line	12mm	120	14-15W	1050lm		

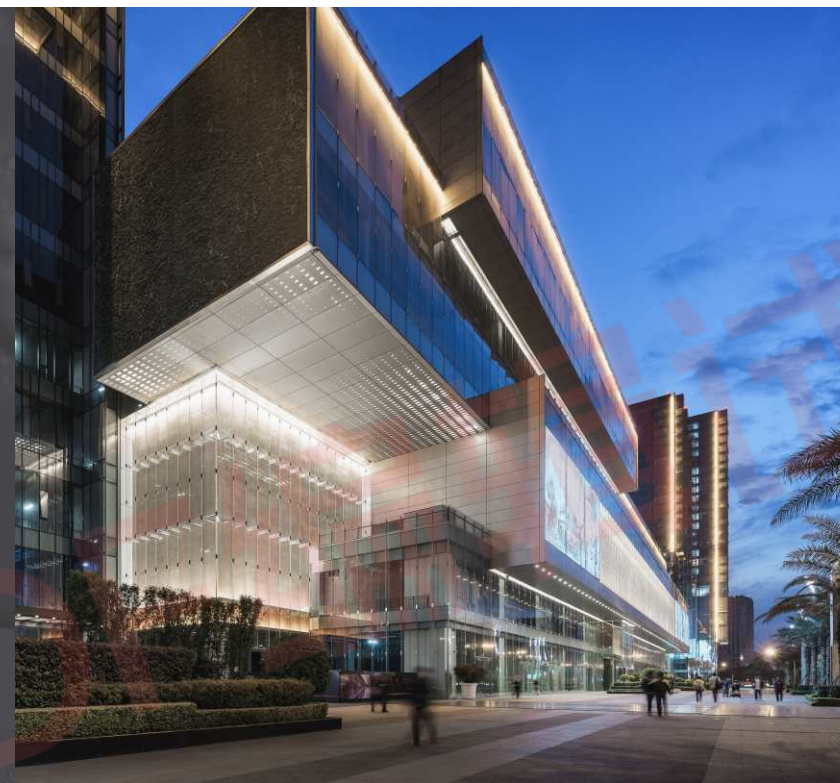

**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

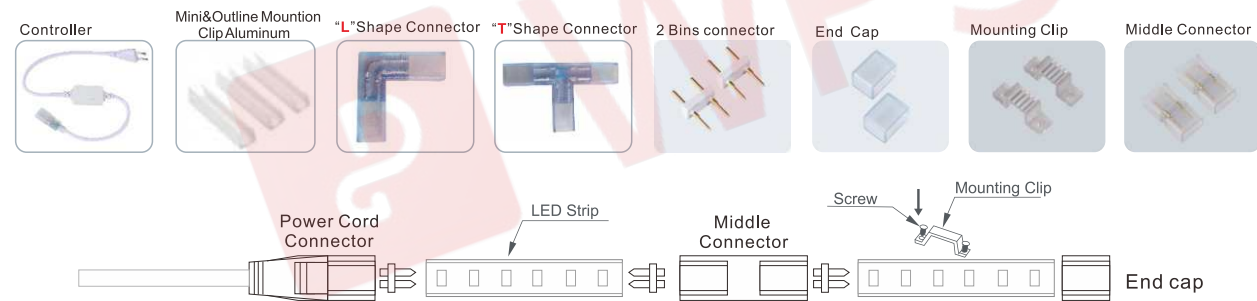

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V	IP67	SMD5050	2 Years	Yes	/	120°	0.5m	RGB
AC220V	IP67	SMD5050	2 Years	Yes	/	120°	1m	RGB

**Product Type**


Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	LM/M	Dimension	100M Carton Size
5050-60D-10mm	AC220V/ 110V	Single Line	10mm	60	8-9W	/		
5050-120D-15mm	AC220V/ 110V	Double Line	15mm	120	10-12W	/		



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

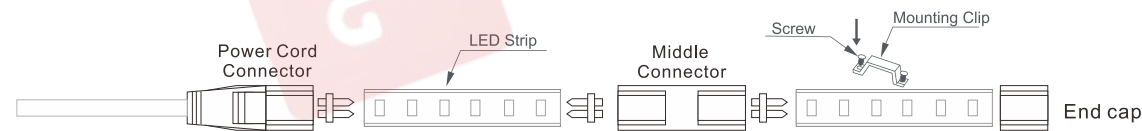

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	FPCB Type	LED Type	Life Span	Dimmable	CRI	Beam Angle	CCT
AC110V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B
AC220V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B

**Product Type**


Item No:	Input Voltage	LED QTY	Power/M	LM	Cutting Intervals	Dimension	100M Carton Size
2835-60L-8mm	AC110V/220V	Single Line	8.5W	50-55lm	20cm	12*6mm	31*31*19.5cm
2835-60L-8mm	AC110V/220V	Single Line	5W	24-26lm	100cm	12*6mm	31*31*19.5cm



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

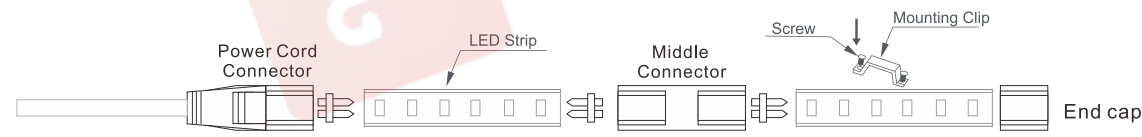

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	FPCB Type	LED Type	Life Span	Dimmable	CRI	Beam Angle	CCT
AC110V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B
AC220V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B

**Product Type**

Item No:	Input Voltage	LED QTY	Power/M	LM/M	Cutting Intervals	Dimension	100M Carton Size
2835-120L-8mm	AC110V/220V	Single Line	10W	50-55lm	20cm	12*6mm	31*31*19.5cm
2835-120L-8mm	AC110V/220V	Single Line	7W	24-26lm	100cm	12*6mm	31*31*19.5cm






**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

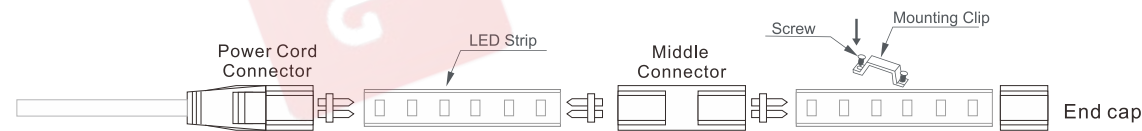

**PRODUCT FEATURES**




**Technical Data**

Input Voltage	IP Grade	FPCB Type	LED Type	Life Span	Dimmable	CRI	Beam Angle	CCT
AC110V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B
AC220V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B

**Product Type**


Item No:	Input Voltage	LED QTY	Power/M	LM	Cutting Intervals	Dimension	100M Carton Size
2835-120L-11mm	AC110V/220V	Double Line	12.5W	50-55lm	20cm	13*6mm	31*31*21.5cm
2835-120L-11mm	AC110V/220V	Double Line	8-9W	24-26lm	100cm	13*6mm	31*31*21.5cm
2835-120L-12mm	AC110V/220V	Double Line	10.5W	50-55lm	50cm	15*6.5mm	31*31*21.5cm

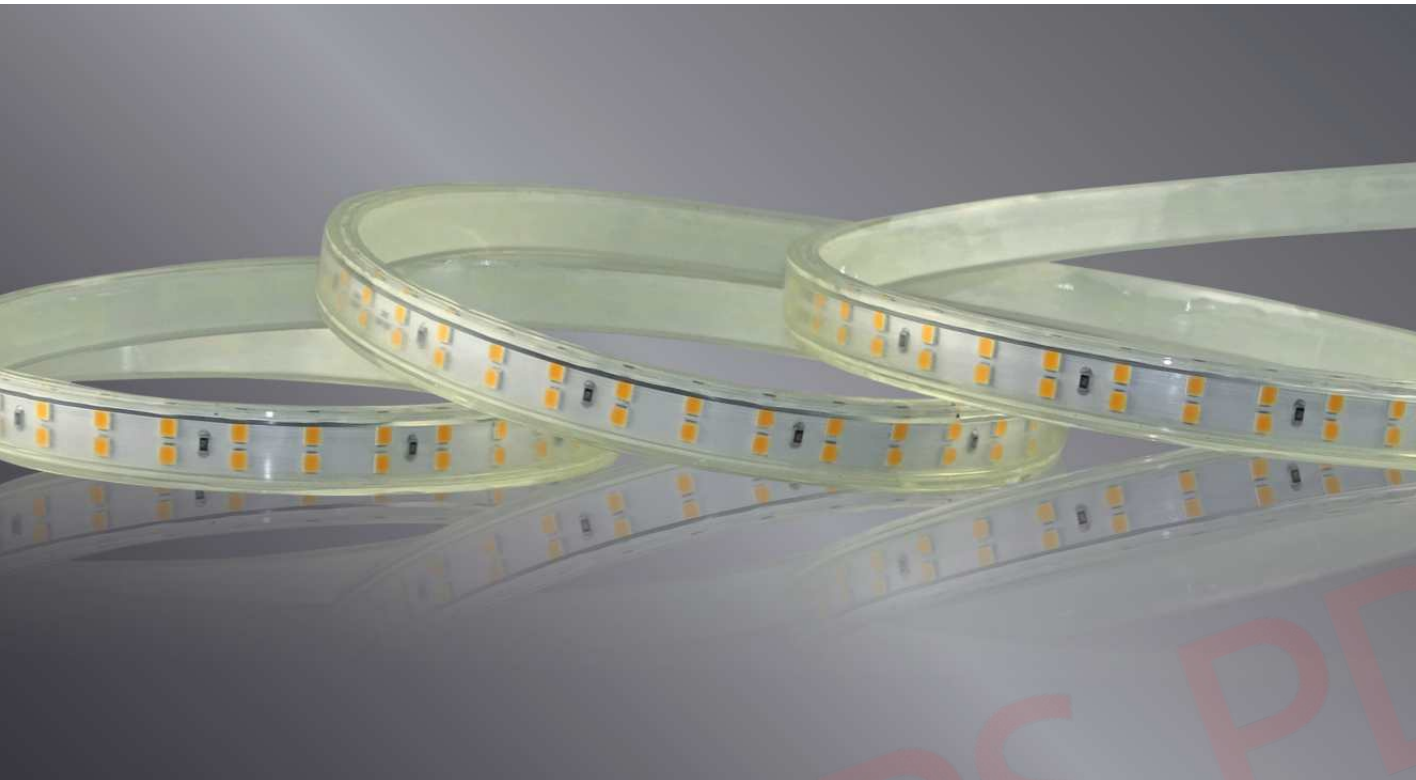

**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

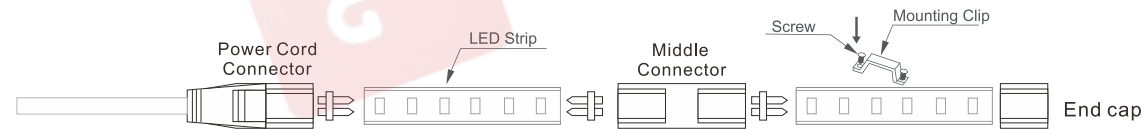

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	FPCB Type	LED Type	Life Span	Dimmable	CRI	Beam Angle	CCT
AC110V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B
AC220V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B

**Product Type**


Item No:	Input Voltage	LED QTY	Power/M	LM/M	Cutting Intervals	Dimension	100M Carton Size
2835-180L-11mm	AC110V/220V	Double Line	10W	24-26lm	100cm	13*6mm	31*31*21.5cm



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

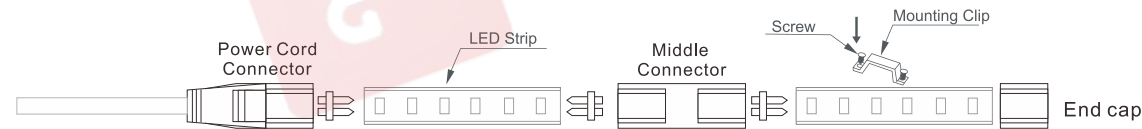

**PRODUCT FEATURES**




**Technical Data**

Input Voltage	IP Grade	FPCB Type	LED Type	Life Span	Dimmable	CRI	Beam Angle	CCT
AC110V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B
AC220V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B

**Product Type**


Item No:	Input Voltage	LED QTY	Power/M	LM/M	Cutting Intervals	Dimension	100M Carton Size
2835-75L-10mm	AC220V/ 110V	Single Line	9W	1200lm	10cm	13*6mm	31*31*18cm
2835-120L-10mm	AC220V/ 110V	Single Line	9W	1200lm	10cm	13*6mm	31*31*18cm

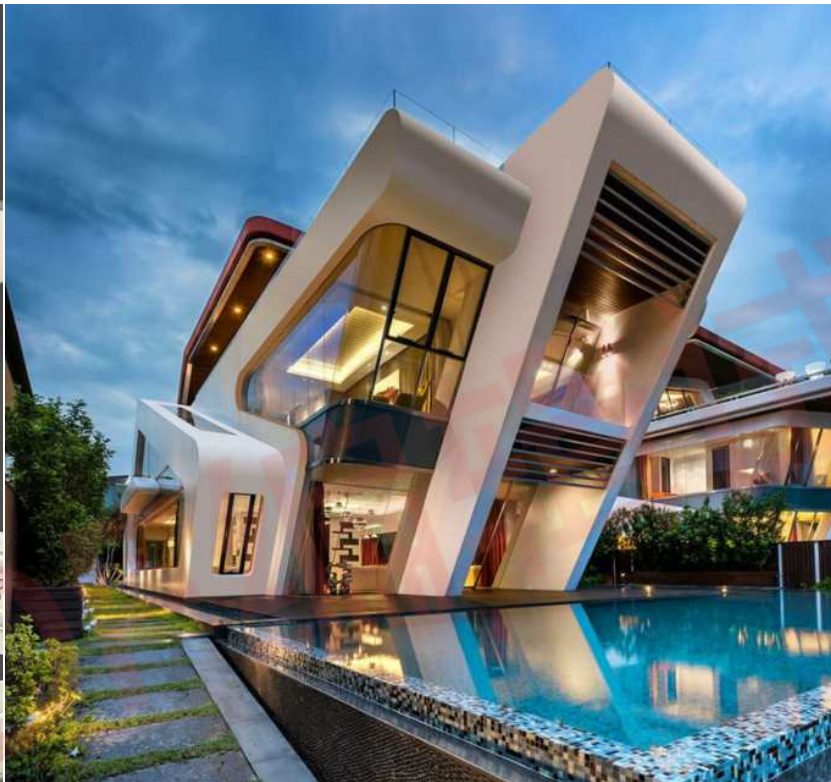

**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

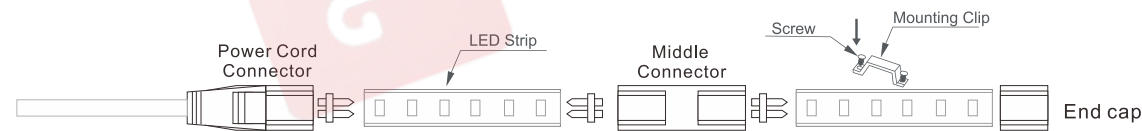

**PRODUCT FEATURES**




**Technical Data**

Input Voltage	IP Grade	FPCB Type	LED Type	Life Span	Dimmable	CRI	Beam Angle	CCT
AC110V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B
AC220V	IP65	wire less	SMD2835	2Years	Yes	70+	120°	W,NW,WW,R,G,B

**Product Type**

Item No:	Input Voltage	LED QTY	Power/M	LM/M	Cutting Intervals	Dimension	100M Carton Size
2835-120L-10mm	AC220V/ 110V	Single Line	10.5W	1400lm	10cm	13*6mm	31*31*18cm
2835-120L-10mm	AC220V/ 110V	Single Line	10.5W	1400lm	10cm	13*6mm	31*31*18cm

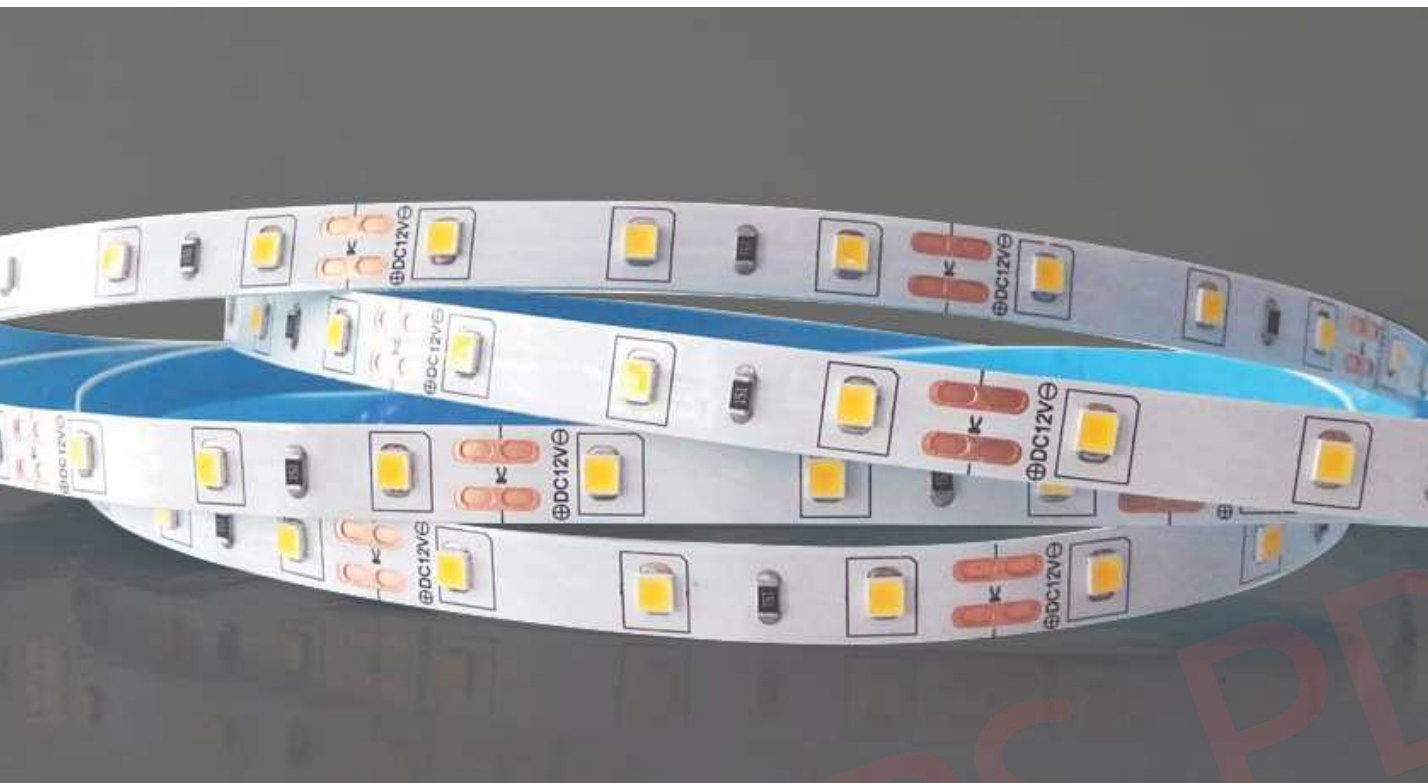


**CLEAR SERIES**

- With 3M adhesive tape on the back
- 8mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**



**Aluminum Profiles**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	Max Length Per Input	CCT
DC12V/24V	IP20/44/65	SMD2835	1Year	Yes	65+	120°	3leds/6leds	5M	W,NW,WW,R,G,B
DC12V/24V	IP20/44/65	SMD2835	2Years	Yes	70+	120°	3leds/6leds	5M	W,NW,WW,R,G,B
DC12V/24V	IP20/44/65	SMD2835	2Years	Yes	80+	120°	3leds/6leds	5M	W,NW,WW,R,G,B

**Product Type**

Item No:	Input Voltage	Array	Power/M	LM	LM/M	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
2835-60D-8mm	DC12V	Single Line	3-4W	4-6lm	150lm	1Year	8*2.4mm	10*3.65mm	62.5*39.5*23cm
2835-60D-8mm	DC12V	Single Line	3-4W	4-6lm	250lm	1Year	8*2.4mm	10*3.65mm	62.5*39.5*23cm
2835-60D-8mm	DC12V/24V	Single Line	4-5W	18-20lm	350lm	2Years	8*2.4mm	10*3.65mm	62.5*39.5*23cm
2835-60D-8mm	DC12V/24V	Single Line	6-7W	24-26lm	650lm	2Years	8*2.4mm	10*3.65mm	62.5*39.5*23cm




**CLEAR SERIES**

- With 3M adhesive tape on the back
- 8mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile


**IP Rate**



**PRODUCT TYPE**



**Aluminum Profiles**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	Max Length Per Input	CCT
DC12V/24V	IP20/44/65	SMD2835	1Year	Yes	65+	120°	3leds/6leds	5M	W,NW,WW,R,G,B
DC12V/24V	IP20/44/65	SMD2835	2Years	Yes	70+	120°	3leds/6leds	5M	W,NW,WW,R,G,B
DC12V/24V	IP20/44/65	SMD2835	2Years	Yes	80+	120°	3leds/6leds	5M	W,NW,WW,R,G,B

**Product Type**

Item No:	Input Voltage	Array	Power/M	LM	LM/M	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
2835-120D-8mm	DC12V	Single Line	7-8W	4-6lm	600lm	1 year	8*2.4mm	8*2.4mm	62.5*39.5*23cm
2835-120D-8mm	DC12V	Single Line	7-8W	4-6lm	600lm	1 year	8*2.4mm	8*2.4mm	62.5*39.5*23cm
2835-120D-8mm	DC12V/24V	Single Line	8-9W	18-20lm	670lm	2 years	8*2.4mm	8*2.4mm	62.5*39.5*23cm
2835-120D-8mm	DC12V/24V	Single Line	10-12W	24-26lm	1000lm	2 years	8*2.4mm	8*2.4mm	62.5*39.5*23cm





**CLEAR SERIES**

- With 3M adhesive tape on the back
- 10mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**

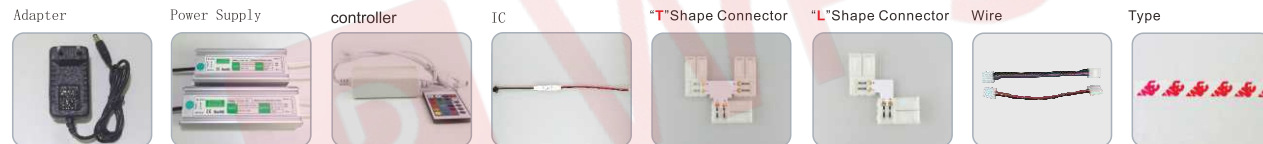

**Aluminum Profiles**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	Max Length Per Input	CCT
DC12V/24V	IP20/44/65	SMD2835	2Years	Yes	70+	120°	3leds/6leds	5M	W,NW,WW,R,G,B

**Product Type**

Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	LM/M	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
2835-120D-10mm	DC12V/24V	Single Line	10mm	180	12W	1100lm	2 years	8*2.4mm	8*2.4mm	62.5*39.5*23cm





**CLEAR SERIES**

- With 3M adhesive tape on the back
- 10mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**

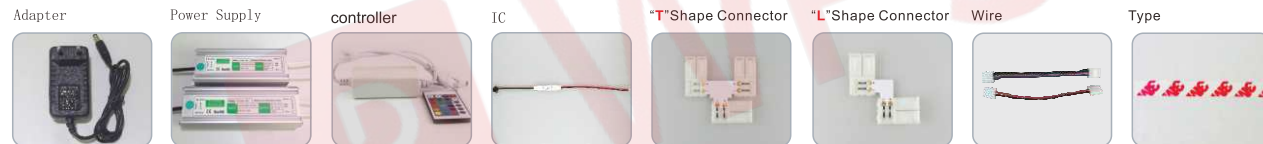

**Aluminum Profiles**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	Max Length Per Input	CCT
DC12V/24V	IP20/44/65	SMD2835	2Years	Yes	70+	120°	3leds/6leds	5M	W,NW,WW,R,G,B
DC12V/24V	IP20/44/65	SMD2835	2Years	Yes	80+	120°	3leds/6leds	5M	W,NW,WW,R,G,B

**Product Type**

Item No:	Input Voltage	Array	Power/M	LM	LM/M	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
2835-240D-10mm	DC12V/24V	Single Line	14W	18-20lm	1100lm	2 years	8*2.4mm	8*2.4mm	62.5*39.5*23cm
2835-240D-10mm	DC12V/24V	Single Line	16-18W	24-26lm	1600lm	2 years	8*2.4mm	8*2.4mm	62.5*39.5*23cm







**CLEAR SERIES**

- With 3M adhesive tape on the back
- 10mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**

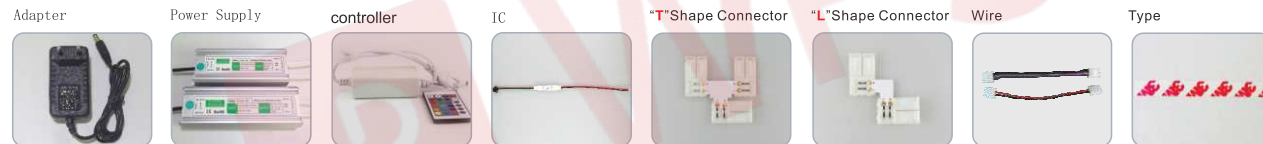

**Aluminum Profiles**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	Max Length Per Input	CCT
DC12V/24V	IP20/IP44/IP65	SMD5050	1Year	Yes	65+	120°	3leds/6leds	5m	W,NW,WW,R,G,B
DC12V/24V	IP20/IP44/IP65	SMD5050	2Years	Yes	70+	120°	3leds/6leds	5m	W,NW,WW,R,G,B
DC12V/24V	IP20/IP44/IP65	SMD5050	2Years	Yes	80+	120°	3leds/6leds	5m	W,NW,WW,R,G,B

**Product Type**

Item No:	Input Voltage	Array	Power/M	LM	LM/M	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
5050-30D-10mm	DC12V/ 24V	Single Line	3-4W	4-6lm	250lm	1 year	8*2.4mm	10*3.65mm	62.5*39.5*23cm
5050-30D-10mm	DC12V/24V	Single Line	4-5W	16-18lm	380lm	2 years	8*2.4mm	10*3.65mm	62.5*39.5*23cm
5050-30D-10mm	DC12V/24V	Single Line	4-5W	16-18lm	380lm	2 years	8*2.4mm	10*3.65mm	62.5*39.5*23cm
5050-30D-10mm	DC12V/24V	Single Line	5-6W	20-22lm	450lm	2 years	10*3mm	10*3.65mm	62.5*39.5*23cm




**CLEAR SERIES**

- With 3M adhesive tape on the back
- 10mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**



**Aluminum Profiles**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	Beam Angle	Cutting Intervals	Max Length Per Input	CCT
DC12V/24V	IP20/IP44/IP65	SMD5050	1Year	Yes	120°	3leds/6leds	5m	RGB
DC12V/24V	IP20/IP44/IP65	SMD5050	2Years	Yes	120°	3leds/6leds	5m	RGB
DC12V/24V	IP20/IP44/IP65	SMD5050	2Years	Yes	120°	3leds/6leds	5m	RGB

**Product Type**

Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
5050-30D-10mm	DC12V/24V	Single Line	10mm	30	4-5W	1 year	10*3mm	12*4.2mm	62.5*39.5*23cm
5050-30D-10mm	DC12V/24V	Single Line	10mm	30	4-5W	2 years	10*3mm	12*4.2mm	62.5*39.5*23cm
5050-30D-10mm	DC12V/24V	Single Line	10mm	30	6-7W	2 years	10*2.5mm	12*4.2mm	62.5*39.5*23cm





**CLEAR SERIES**

- With 3M adhesive tape on the back
- 10mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**

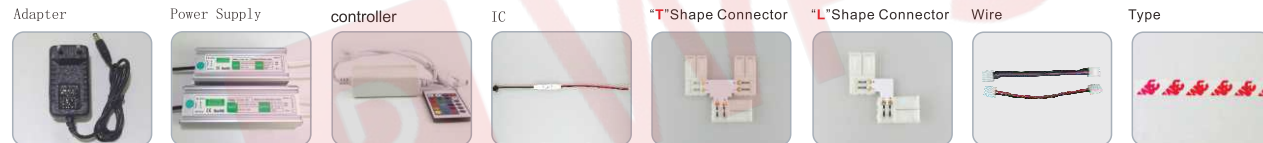

**Aluminum Profiles**




**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	Max Length Per Input	CCT
DC12V/24V	IP20/IP44/IP65	SMD5050	1Year	Yes	65+	120°	3leds/6leds	5m	W,NW,WW,R,G,B
DC12V/24V	IP20/IP44/IP65	SMD5050	2Years	Yes	70+	120°	3leds/6leds	5m	W,NW,WW,R,G,B
DC12V/24V	IP20/IP44/IP65	SMD5050	2Years	Yes	80+	120°	3leds/6leds	5m	W,NW,WW,R,G,B

**Product Type**

Item No:	Input Voltage	Array	Power/M	LM	LM/M	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
5050-60D-10mm	DC12V/24V	Single Line	3-4W	10-12lm	150lm	1 year	10*3mm	12*4.2mm	62.5*39.5*23cm
5050-60D-10mm	DC12V/24V	Single Line	7-8W	10-12lm	600lm	2 years	10*3mm	12*4.2mm	62.5*39.5*23cm
5050-60D-10mm	DC12V/24V	Single Line	8-9W	16-18lm	700lm	2 years	12*2.4mm	14*4.2mm	62.5*39.5*23cm
5050-60D-10mm	DC12V/24V	Single Line	10-12W	20-22lm	900lm	2 years	10*3mm	12*4.2mm	62.5*39.5*23cm

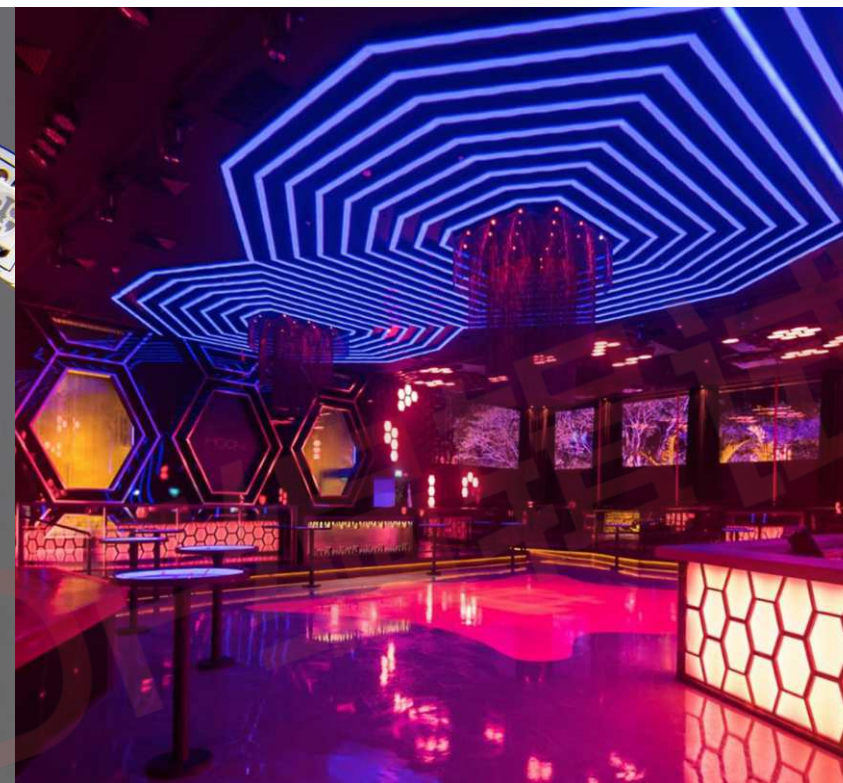



**CLEAR SERIES**

- With 3M adhesive tape on the back
- 10mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**

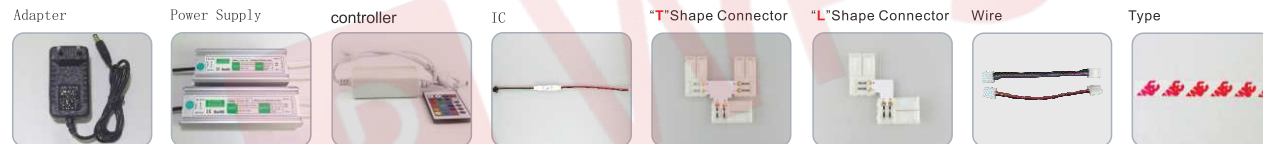

**Aluminum Profiles**




**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	Beam Angle	Cutting Intervals	Max Length Per Input	LEDQTY
DC12V/24V	IP20/IP44/IP65	SMD5050	1Year	Yes	120°	3leds/6leds	5m	60
DC12V/24V	IP20/IP44/IP65	SMD5050	2Years	Yes	120°	3leds/6leds	5m	60
DC12V/24V	IP20/IP44/IP65	SMD5050	2Years	Yes	120°	3leds/6leds	5m	60

**Product Type**

Item No:	Input Voltage	Array	FPCB size	Power/M	CCT	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
5050-60D-10mm	DC12V/24V	Single Line	10mm	8-9W	RGB	1 year	10*3mm	12*4.2mm	62.5*39.5*23
5050-60D-10mm	DC12V/24V	Single Line	10mm	8-9W	RGB	2 years	10*3mm	12*4.2mm	62.5*39.5*23
5050-60D-10mm	DC12V/24V	Single Line	10mm	10-12W	RGB	2 years	10*2.5mm	12*4.2mm	62.5*39.5*23
5050-60D-12mm	DC12V/24V	Single Line	12mm	10-12W	RGBW	2 years	10*3mm	12*4.2mm	62.5*39.5*23
5050-60D-12mm	DC12V/24V	Single Line	12mm	10-12W	RGB+W	2 years	10*3mm	12*4.2mm	62.5*39.5*23

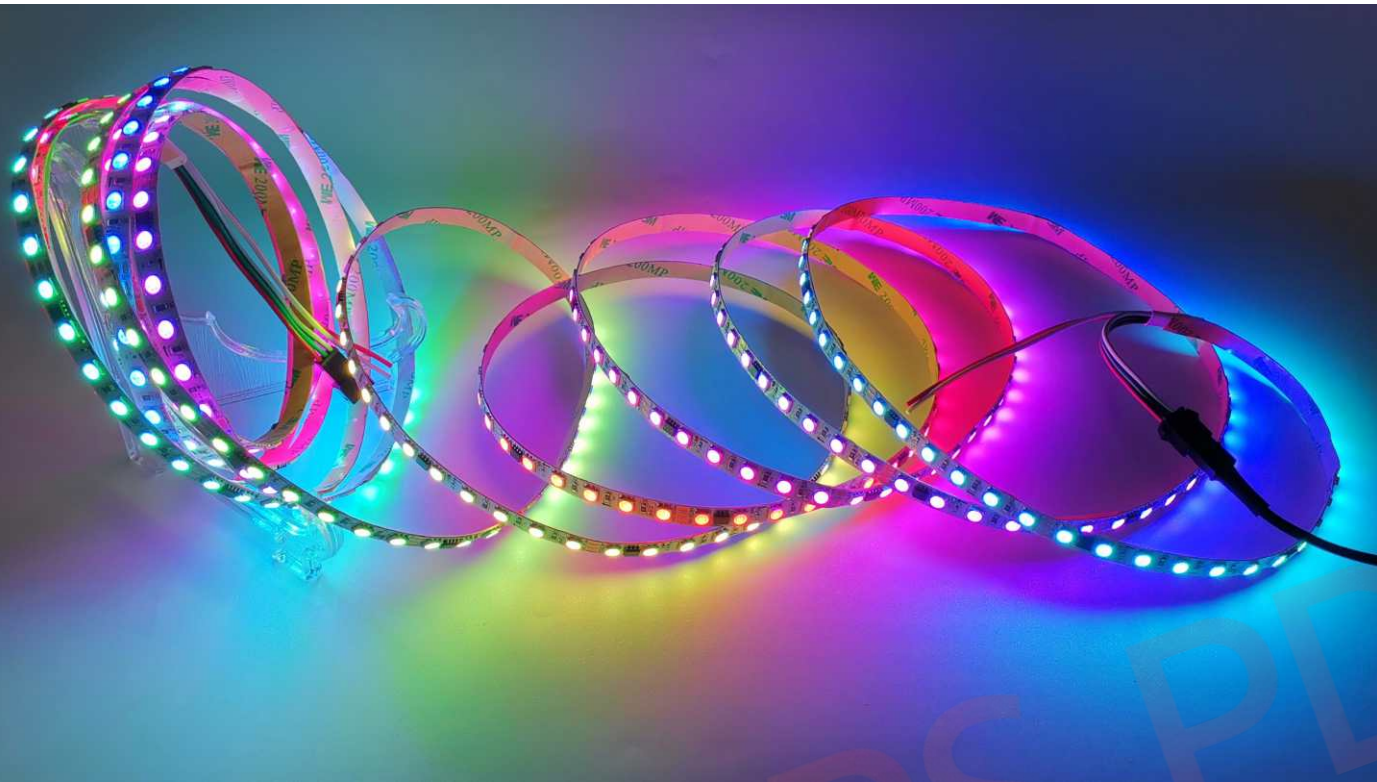

**CLEAR SERIES**

- With 3M adhesive tape on the back
- 10mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**Controller**



**Technical Data**

Input Voltage	IP Grade	Life Span	Dimmable	Beam Angle	Cutting Intervals	Max Length Per Input	CCT
DC12V /24V	IP20/IP44/IP65	1Year	Yes	120°	3leds/6leds	5m/10m	Colorful
DC12V /24V	IP20/IP44/IP65	2Years	Yes	120°	3leds/6leds	5m/10m	Colorful

**Product Type**

Item No:	VOltage	FPCB Size	Power/M	LED QTY	Life Span	IP44 Dimension	IP66 Dimension	Carton Size
5050-8206-30D	DC12V/24V	10mm	7W	30	1Year	10*3mm	12*4.2mm	62.5*39.5*23
5050-8206-60D	DC12V/24V	10mm	14W	60	2Years	10*3mm	12*4.2mm	62.5*39.5*23
5050-1934-30D	DC12V/24V	10mm	7W	30	1Year	10*3mm	12*4.2mm	62.5*39.5*23
5050-1934-60D	DC12V/24V	10mm	14W	60	2Years	10*3mm	12*4.2mm	62.5*39.5*23




**CLEAR SERIES**

- With 3M adhesive tape on the back
- 8 mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**

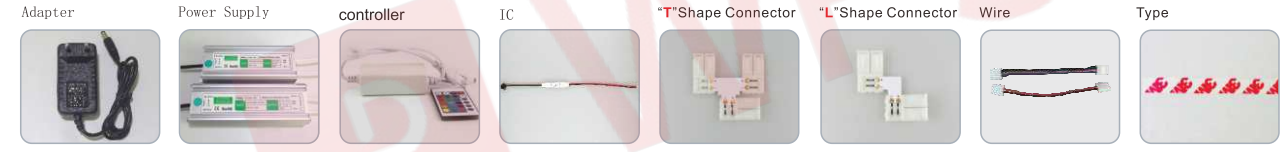

**aluminum Profiles**




**Technical Data**

Input Voltage	IP Grade	SMD Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
DC12V /24V	Ip20 Ip44, IP65	1812	2Years	Yes	80+	120°	3/6 leds	W,NW,WW,R,G,B

**Product Type**

Item No:	Voltage	Array	FPCB Size	Power/M	LED QTY	Life Span	LM/W	Dimension	Carton Size
1812-336P	DC12V/24V	single Line	8mm	8W	336	2years	1000lm	2*8mm	62.5*39.5*23cm
1812-420P	DC12V/24V	single Line	8mm	10W	420	2years	1200lm	2*8mm	62.5*39.5*23cm
1812-528P	DC12V/24V	single Line	8mm	11W	528	2years	1300lm	2*8mm	62.5*39.5*23cm
1812-720P	DC12V/24V	single Line	8mm	12W	720	2years	1500lm	2*8mm	62.5*39.5*23cm

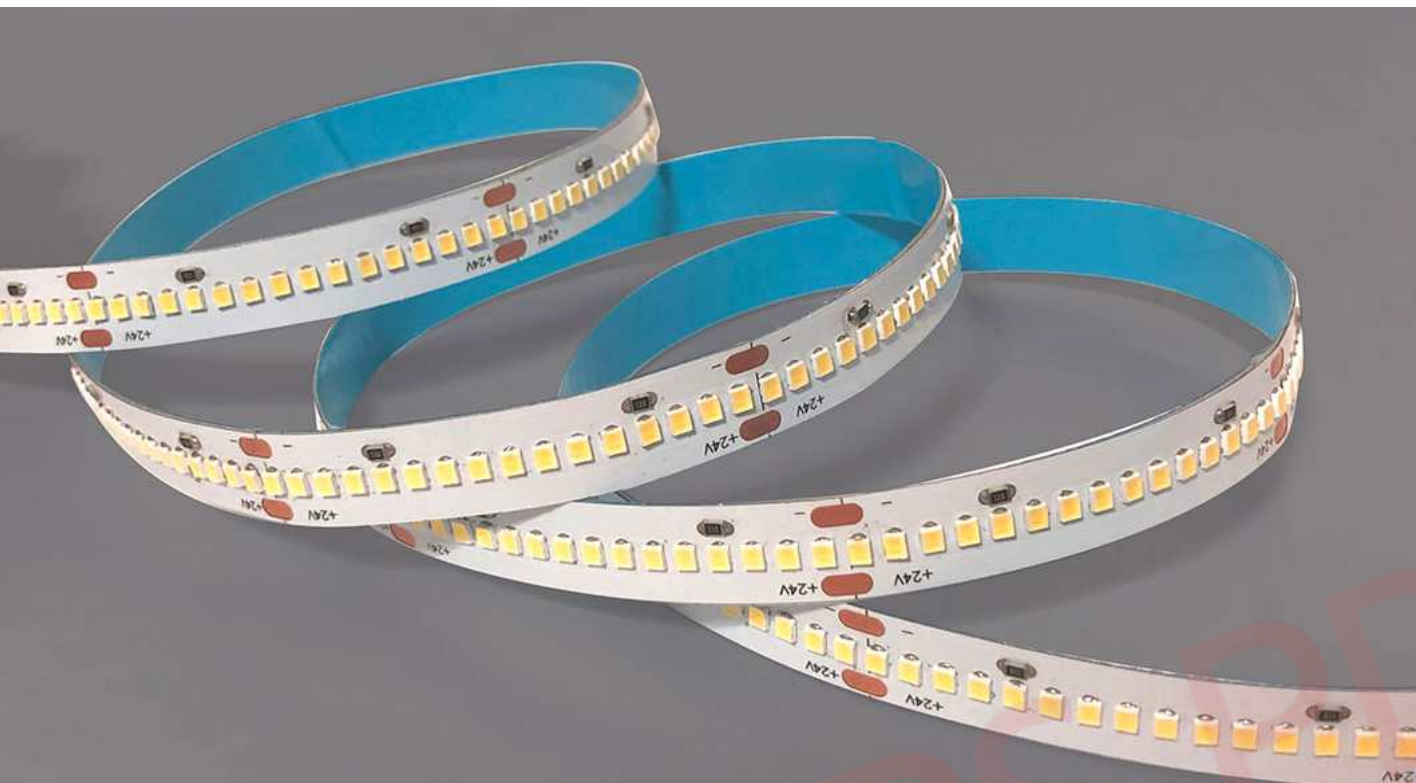


**CLEAR SERIES**

- With 3M adhesive tape on the back
- 8 mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**

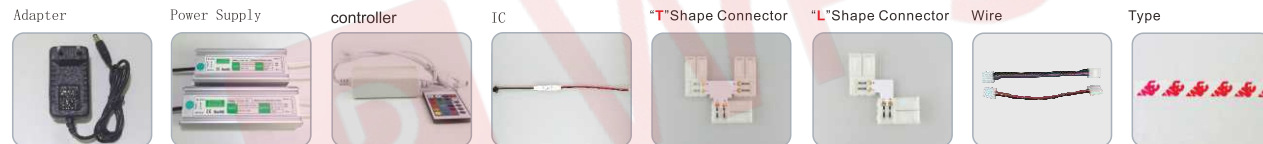

**aluminum Profiles**




**Technical Data**

Input Voltage	IP Grade	SMD Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
DC12V /24V	Ip20 Ip44, IP65	2025	2Years	Yes	80+	120°	1 leds	W,NW,WW,R,G,B

**Product Type**

Item No:	Voltage	Array	FPCB Size	Power/M	LED QTY	Life Span	LM/W	Dimension	Carton Size
2025-336P	DC12V/24V	single Line	10mm	12W	336	2years	1000lm	2*10mm	62.5*39.5*23cm

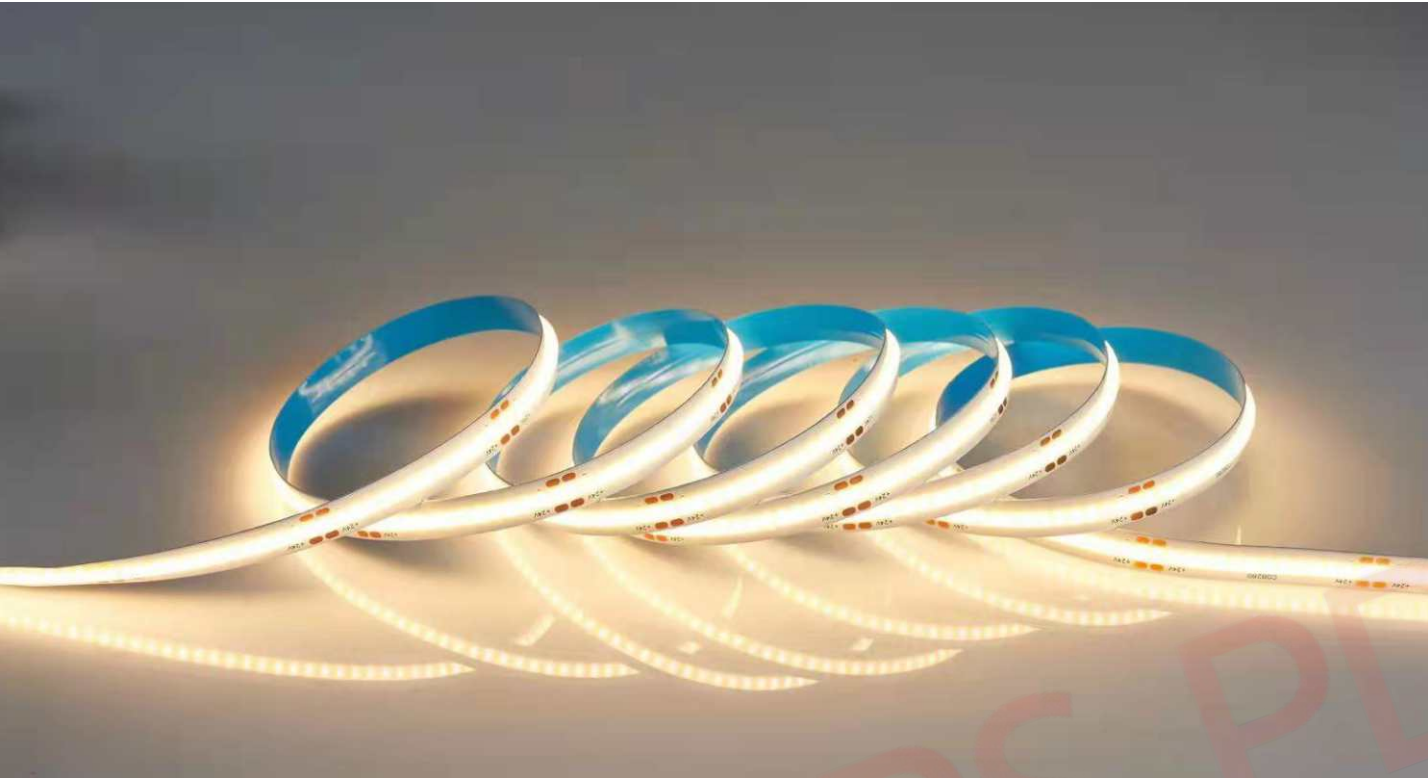


**CLEAR SERIES**

- With 3M adhesive tape on the back
- 8 mm wide high quality FPC board
- 120° beam angle
- Very good color reproduction up to CRI90
- High quality led beads , life time >30,000 hours
- Excellent heat dissipation guarantees LED's high light output
- Compatible with different kinds of aluminum profile

**IP Rate**



**PRODUCT TYPE**

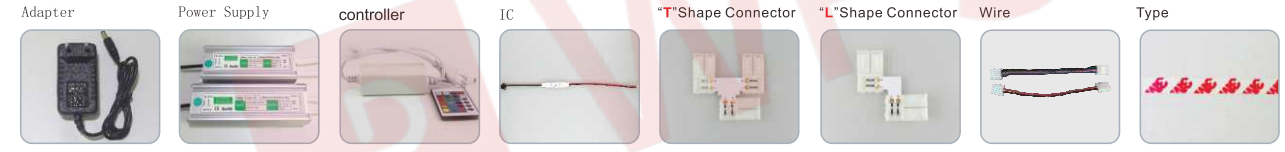

**aluminum Profiles**




**Technical Data**

Input Voltage	IP Grade	Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
DC12V /24V	IP20	COB	2Year	Yes	80+	120°	2/5cm	W,NW,WW,R,G,B

**Product Type**

Item No:	Voltage	Array	FPCB Size	Power/M	LED QTY	Life Span	LM/W	Dimension	Carton Size
COB-320P	DC12V/24V	single Line	8mm	12W	336	2years	1000lm	2*8mm	62.5*39.5*23cm
COB-420P	DC12V/24V	single Line	8mm	14W	420	2years	1400lm	2*8mm	62.5*39.5*23cm




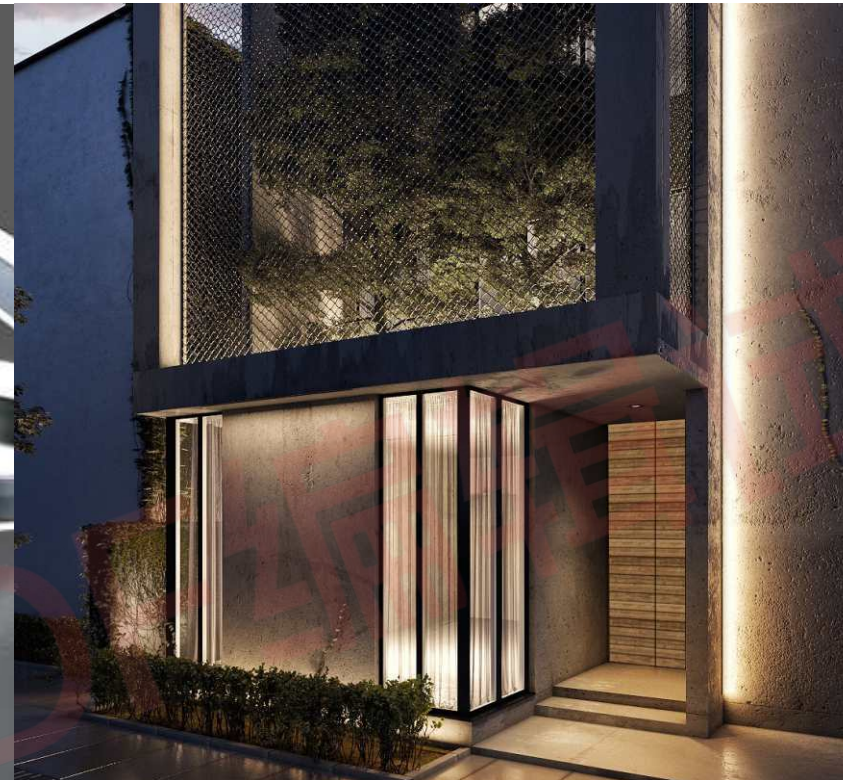

**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

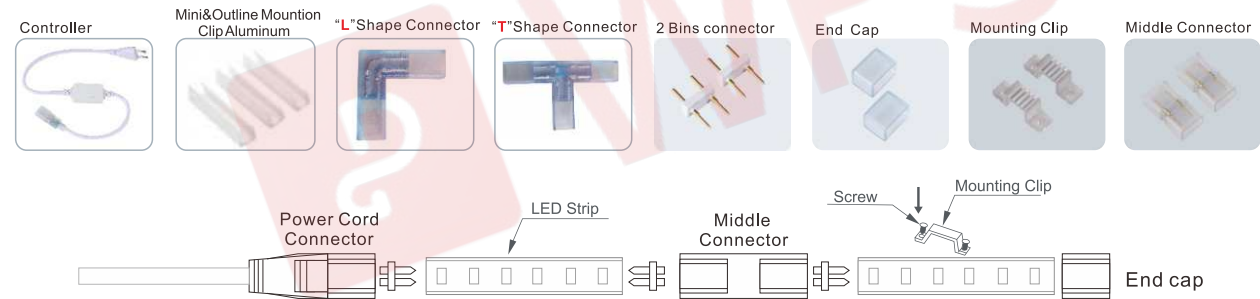

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V/220V	IP65	SMD2835	1 Year	Yes	60+	120°	1M	W/NW/W/R/G/B/P
AC110V/220V	IP65	SMD2835	2 Years	Yes	80+	120°	1M	W/NW/W/R/G/B/P

**Product Type**


Item No:	Input Voltage	Array	Power/M	LM	LM/M	Dimension	100M Carton Size
2835-120D-6mm	AC110V/220V	Single Line	7-8W	18-20lm	200lm	7.5*15.8mm	32*32*30cm
2835-144D-6mm	AC110V/220V	Single Line	7-8W	24-26lm	300lm	7.5*15.8mm	32*32*30cm



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

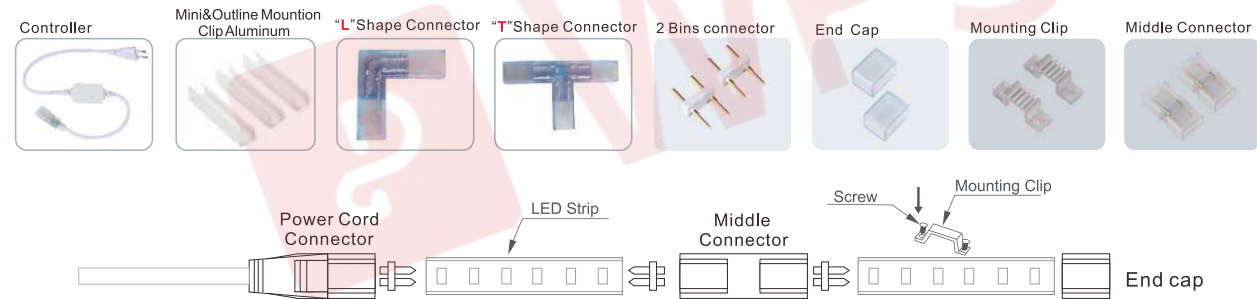

**PRODUCT FEATURES**




**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V/220V	IP65	SMD2835	1 Year	Yes	60+	120°	1M	W/NW/W/R/G/B/P
AC110V/220V	IP65	SMD2835	2 Years	Yes	80+	120°	1M	W/NW/W/R/G/B/P

**Product Type**


Item No:	Input Voltage	Array	Power/M	LM	LM/M	Dimension	100M Carton Size
2835-120D-6mm	AC110V/220V	Single Line	7-8W	18-20lm	170lm	7.5*15.8mm	32*32*30cm
2835-144D-6mm	AC110V/220V	Single Line	7-8W	24-26lm	270lm	7.5*15.8mm	32*32*30cm

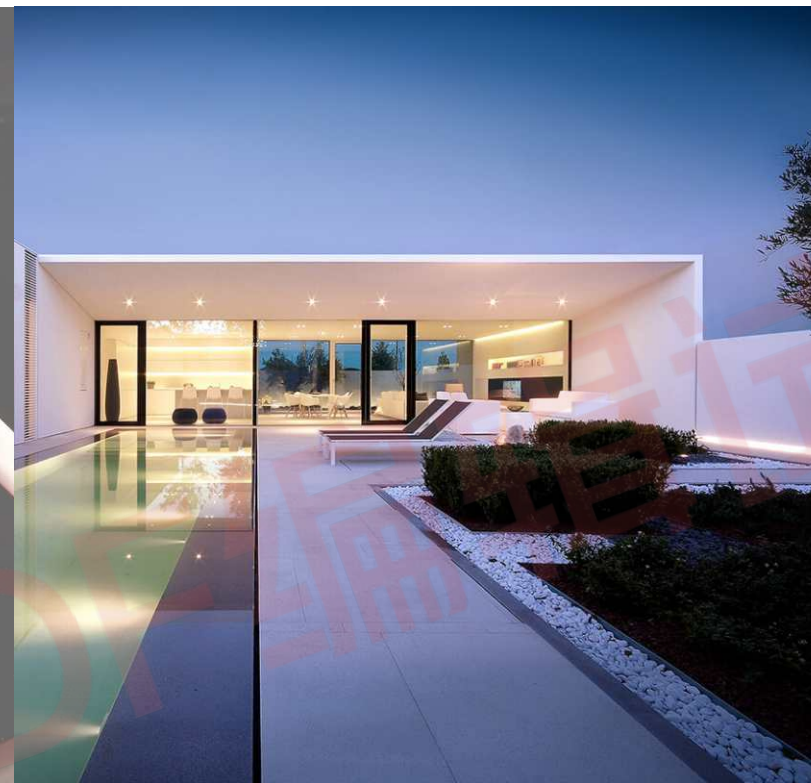

**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 340° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

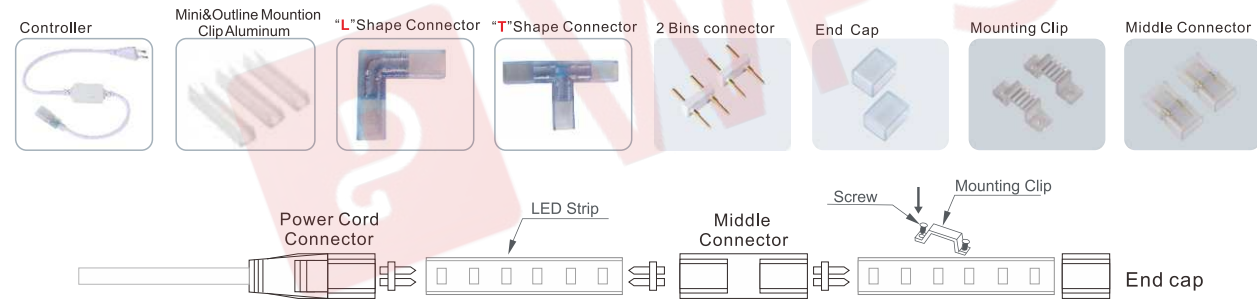

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V/220V	IP65	SMD2835	1 Year	Yes	60+	340°	1M	W/NW/W/R/G/B/P
AC110V/220V	IP65	SMD2835	2 Years	Yes	80+	340°	1M	W/NW/W/R/G/B/P

**Product Type**


Item No:	Input Voltage	Array	Power/M	LM	LM/M	Dimension	100M Carton Size
2835-120D-6mm	AC110V/220V	Single Line	7-8W	18-20lm	300lm	15*15mm	32*32*35cm
2835-144D-6mm	AC110V/220V	Single Line	7-8W	24-26lm	500lm	15*15mm	32*32*35cm



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

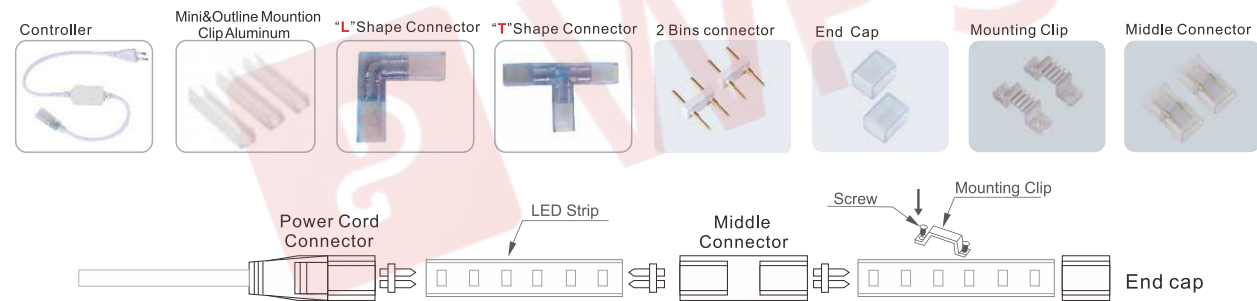

**PRODUCT FEATURES**




**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V/220V	IP65	SMD2835	1 Year	Yes	60+	120°	1M	W/NW/W/R/G/B/P
AC110V/220V	IP65	SMD2835	2 Years	Yes	80+	120°	1M	W/NW/W/R/G/B/P

**Product Type**


Item No:	Input Voltage	Array	Power/M	LM	LM/M	Dimension	100M Carton Size
2835-120D-6mm	AC110V/220V	Single Line	7-8W	18-20lm	400lm	15*16mm	32*32*35cm
2835-144D-6mm	AC110V/220V	Single Line	7-8W	24-26lm	680lm	15*16mm	32*32*35cm

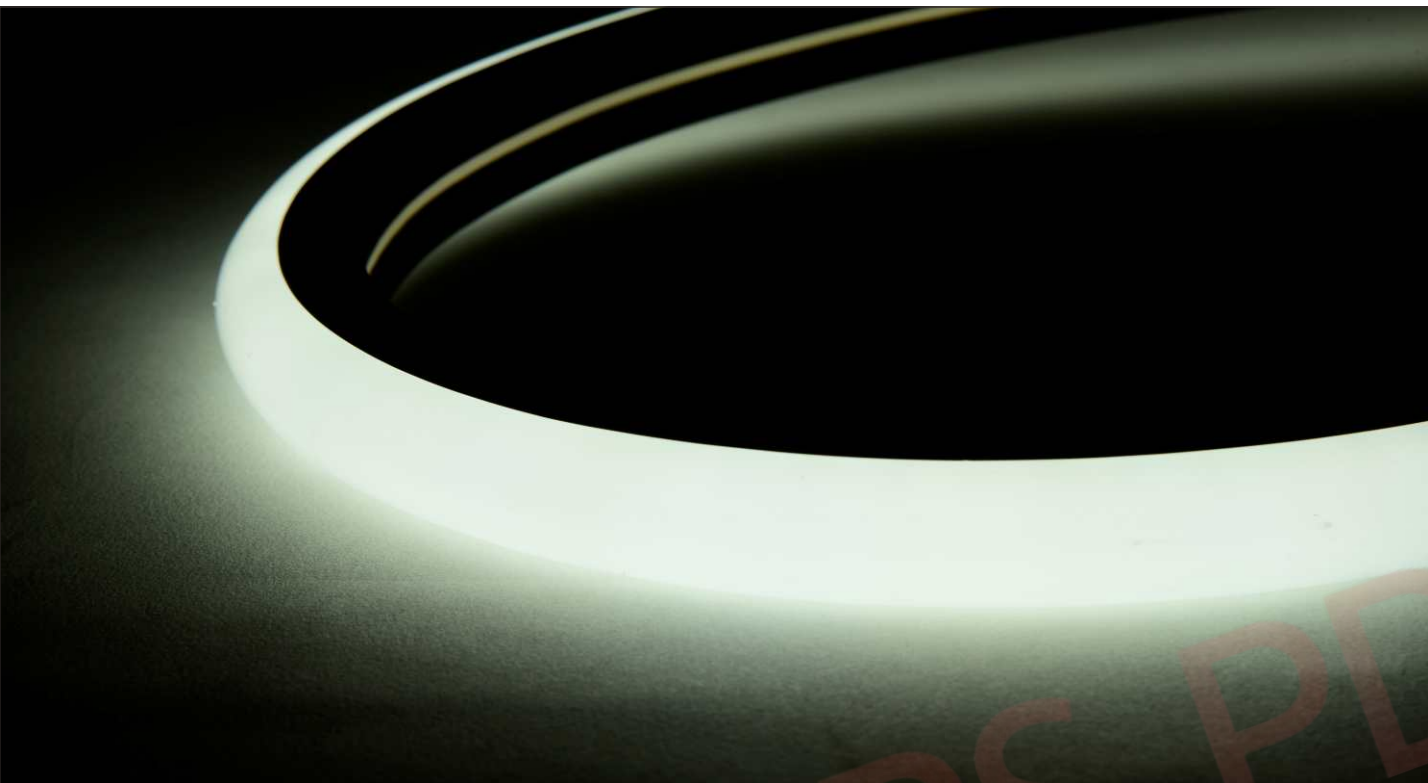

**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

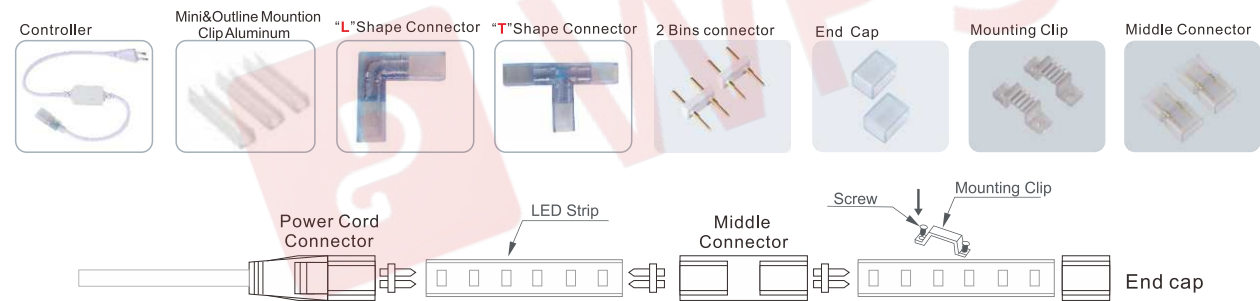

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V/220V	IP65	SMD2835	1 Year	Yes	60+	120°	1M	W/NW/W/R/G/B/P
AC110V/220V	IP65	SMD2835	2 Years	Yes	80+	120°	1M	W/NW/W/R/G/B/P

**Product Type**


Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	LM/M	Dimension	100M Carton Size
2835-144D-12mm	AC110V/220V	Stagger Double Line	12mm	144	10-12W	500	19*22mm	32*32*35cm
2835-240D-12mm	AC110V/220V	Stagger Double Line	12mm	240	10-12W	900	19*22mm	32*32*35cm



**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

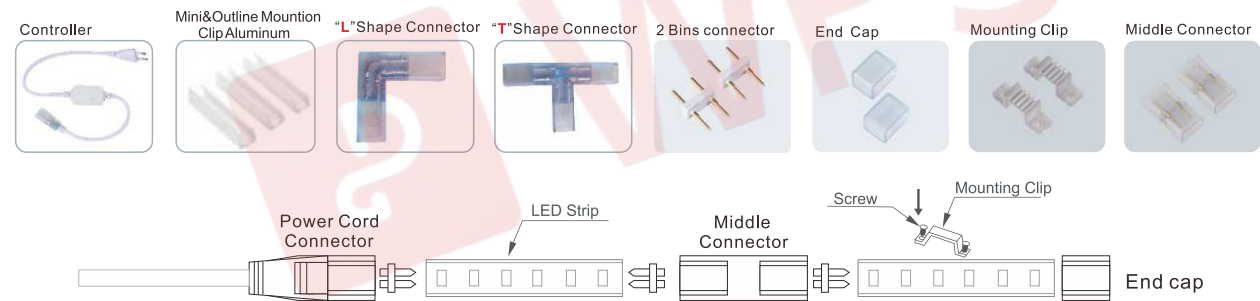

**PRODUCT FEATURES**




**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V/220V	IP65	SMD2835	1 Year	Yes	/	120°	1M	RGB
AC110V/220V	IP65	SMD2835	2 Years	Yes	/	120°	1M	RGB

**Product Type**


Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	LM/M	Dimension	100M Carton Size
5050-72D-10mm	AC110V/220V	Single Line	10mm	72	10-12W	/	7.8*17.8mm	32*32*30cm
5050-72D-10mm	AC110V/220V	Single Line	10mm	72	10-12W	/	7.8*17.8mm	32*32*30cm

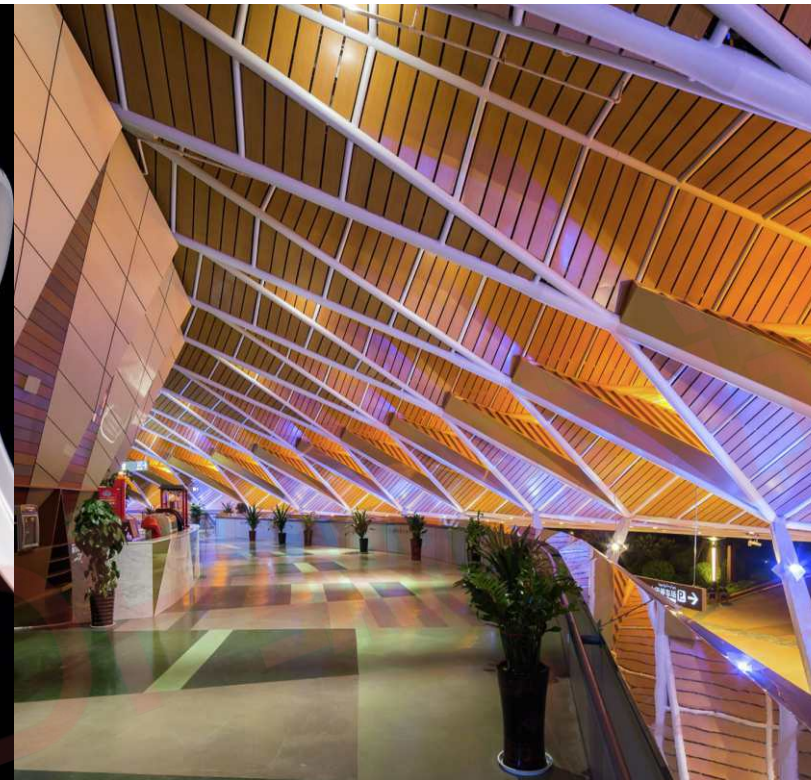

**CLEAR SERIES**

- Anti-UV for outdoor use
- TUV recognized, VO PVC material to minimize fire risk
- TUV compliant bus-conductor ensure electrical safety
- High quality FPC board
- 120° beam angle
- High quality led beads, life time>30,000 hours
- Different electrical connector available

**PRODUCT TYPE**

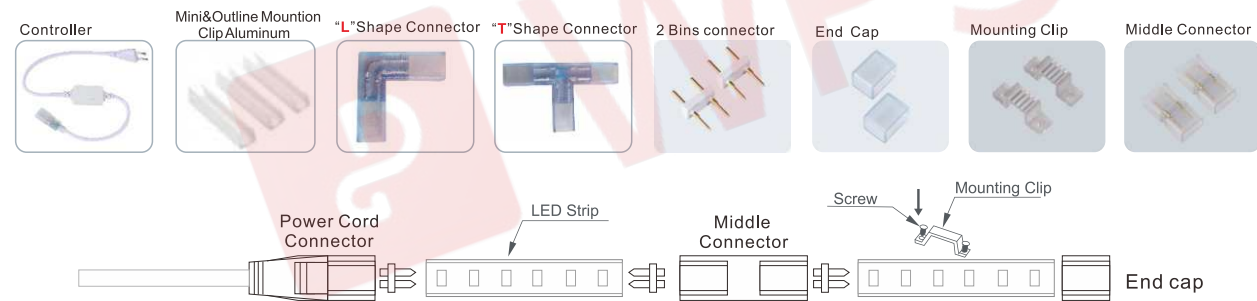

**PRODUCT FEATURES**



**Technical Data**

Input Voltage	IP Grade	LED Type	Life Span	Dimmable	CRI	Beam Angle	Cutting Intervals	CCT
AC110V/220V	IP65	SMD2835	1 Year	Yes	/	120°	1M	RGB
AC110V/220V	IP65	SMD2835	2 Years	Yes	/	120°	1M	RGB

**Product Type**

Item No:	Input Voltage	Array	FPCB size	LED QTY	Power/M	LM/M	Dimension	100M Carton Size
5050-72D-10mm	AC110V/220V	Single Line	10mm	72	10-12W	/	8*18mm	32*32*30cm
5050-72D-10mm	AC110V/220V	Single Line	10mm	72	10-12W	/	8*18mm	32*32*30cm