

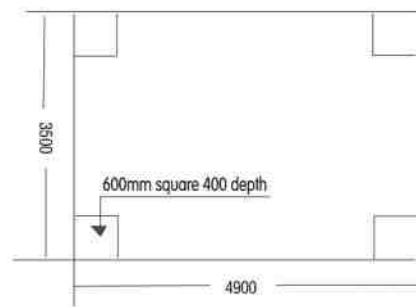


ESW-6340C HYDRAULIC FOUR POST LIFT

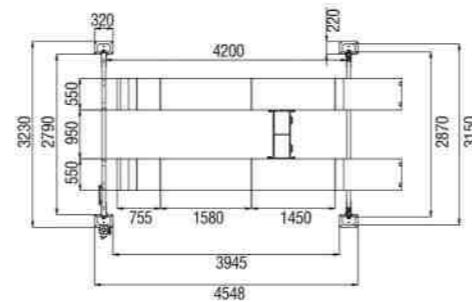

Foundation drawing

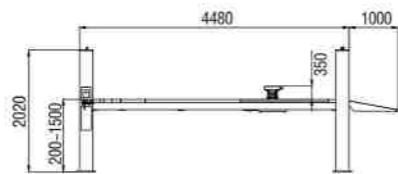

Features:

1. Adopt the electric release, manual and pneumatic release.
2. Hydraulic power unit configuration throttling device, they can always adjust the rate of decline.
3. Hydraulic cylinder drive, rope drive, quiet and smooth lifting.
4. With wire control security lock, with a wire rope fracture protection, operation safety.
5. Adopt electrical release, eight-point locking system, easy to operate.
6. Can be locked in the desired height of operation, safety and reliability.
7. Runway spacing is adjustable for different wheel base vehicle.
8. With the second lift pulley, can adopt the manual release, pneumatic release and hydraulic.

Technical specifications:

Lifting capacity:	3500kg/4000kg/5000kg
Lifting height:	(Main) 1500mm (Jack) 350mm
Min.height:	200mm
Lifting time:	50s-60s
Length of the platform:	4200mm/4500mm/5000mm
Platform width:	550mm
Motor power:	2.2kw-380v/2.2kw-220v
Oil pressure rating:	24Mpa
Air pressure:	0.6-0.8 MPa
Weight:	1200kg/1250kg/1350kg



Electric hydraulic trolley



Manual release



Oil injection hole



Wire rope anti-break lock



Pneumatic hydraulic trolley(optional)



Emergency hand pump(optional)