


H107Q

二段力小角度铝框快装缓冲铰链

TWO WAY ALUMINUM FRAME CLIP ON SMALL ANGLE SOFT CLOSING HINGE

开启角度: 100°
 铝框钻孔孔距: 28mm
 铝材宽度: 19~24mm


Opening degree: 100°
 Holes distance on aluminum frame: 28mm
 Width of aluminum frame: 19~24mm

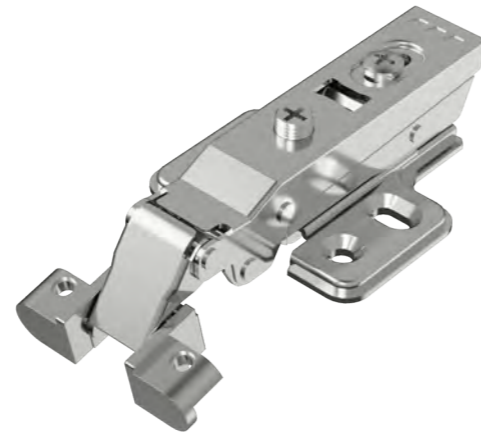


产品种类 Product category

H107QA 直臂(全盖) Full overlay	H107QB 中弯(半盖) Half overlay	H107QC 大弯(内嵌) Inset door


产品盖位计算值表 Table of calculation value of product cover position



D \ W	19	20	21	22	23	24
0	17	18	19	20	21	22






D \ W	19	20	21	22	23	24
0	7	8	9	10	11	12




A \ W	19	20	21	22	23	24
0	1	0	-1	-2	-3	-4

铰杯钻孔 Cup Drilling

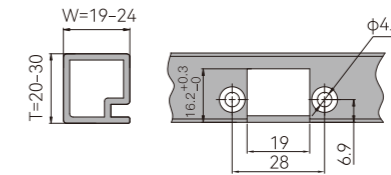



开门避让间隙值 Opening clearance value

A \ T	20	21	22	23	24	25	26	27	28	29	30
19	1.6	2.0	2.4	2.8	3.4	4.1	4.9	5.7	6.6	7.4	8.1
20	1.6	1.9	2.3	2.7	3.2	3.8	4.4	5.3	6.1	7.0	7.8
21	1.6	1.8	2.2	2.6	3.1	3.6	4.2	4.7	5.4	6.3	7.3
22	1.5	1.8	2.1	2.5	3.0	3.3	3.9	4.4	5.1	6.0	6.9
23	1.4	1.7	2.0	2.4	2.9	3.3	3.8	4.4	5.0	5.8	6.5
24	1.4	1.7	2.0	2.4	2.8	3.2	3.7	4.2	4.7	5.5	6.2



H=安装板高度 Height of mounting plate
 D=柜边上所需的面板盖 Required cover distance on side panel
 K=面板外线与铰链盒钻孔距离 Distance from edge of door to the edge of the cup
 T=门身厚度 Door thickness
 L=门与侧板间隙 Gap between door and side panel
 A=面板内线/侧边外线距 Distance from inside edge of door to the outside edge of side panel

L \ T	20	21	22	23	24	25	26	27	28	29	30
19	0	0	0	0	0	0	0	0	0	0.1	0.3
20	0	0	0	0	0	0.2	0.4	0.7	0.9	1.1	1.3
21	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.7	1.9	2.1	2.3
22	1.2	1.4	1.6	1.8	2.0	2.2	1.5	2.7	2.9	3.1	3.3
23	2.2	2.4	2.6	2.8	3.0	3.2	2.5	3.7	3.9	4.1	4.3
24	3.2	3.4	3.6	3.8	4.0	4.2	2.5	4.7	4.9	5.1	5.3

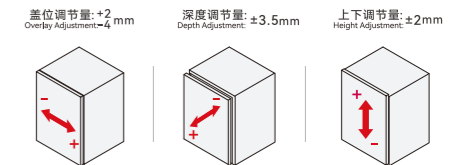

产品配件 Product accessories

底座 Mounting plate P095-P097

木工螺丝 Wooden Screw

P100

铰臂装饰盖 Hinge arm decorative cover P098