









T912

T912幽灵门双向缓冲系列 INVISIBLE SLIDING DOOR




隐藏轨道式隔断门；
专利产品，缓冲行程60mm；
承重80KG，不易变形；
趟门防脱系统；
可移动缓冲定位；
灵活调节，轻松便捷；
造型优美，顺滑静音；
简单便捷，快速安装；
门宽800-1220mm；
门洞宽：533-953mm(门洞全开)，650-1070mm(门洞不全开)。

Concealed rail partition door;
Patented product, soft close for 60mm;
80KG loading capacity, not easy to deform;
Anti fall off sliding door system;
Removable damper positioning;
Flexible adjustment, easy and convenient;
Elegant design, smooth and silent;
Easy installation;
Door width 800-1220mm,
Doorway width: 533-953mm (door fully open),
650-1070mm (door partially open).

T912		
配件名称 Accessories	数量 Qty	3D示意图 3D sketch
主支架 Upper Runner	1	
缓冲器 Soft close device	2	
侧边轮 Side Runner	2	
下定位轮 Down Guide Roller	1	
地轮 Down Runner	2	
左右边盖 End plugs	1	
轨道 Rail	1	
下轨道 Down Rail	1	


门板尺寸参考 Door size

H=门洞高 Doorway Height
 h1=门高 Doorheight
 K=下定位中心到墙面距离
 Distance from the bottom positioning center to the wall
 R=缓冲线厚度 Thickness of baseboard
 S=门板厚度 Thickness of door panel
 Z=支架螺丝孔定位高度
 Height of bracket screw hole positioning

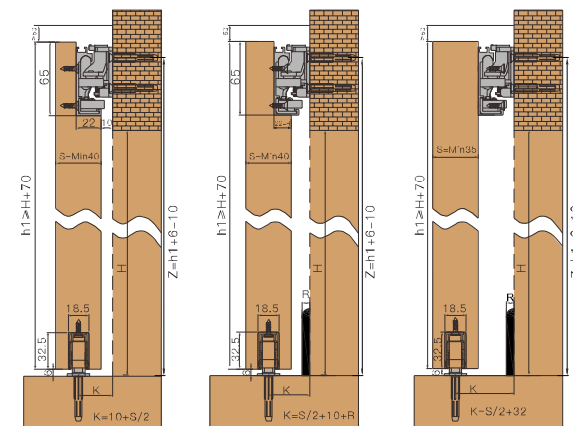

轨道安装尺寸 Rail installation size

L=地轨长度 Ground rail length
 S=门板厚度 Door thickness
 W=门宽 Door width

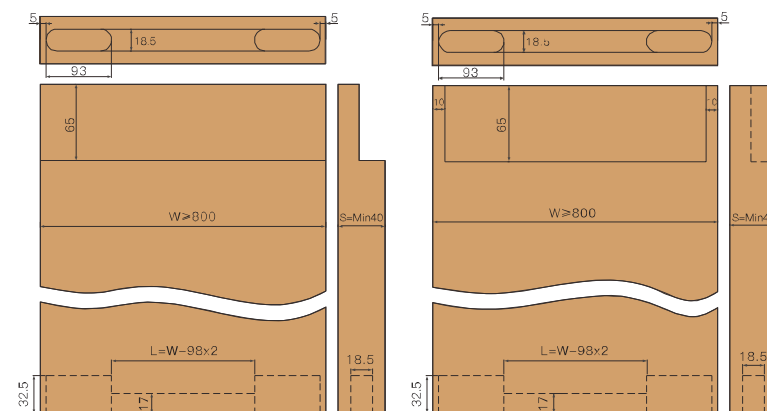

木门模式一(门洞全开) Wooden door installation mode 1(door completely opening)

Y=门的垂直距离 Overlap distance of doors


X=门洞宽 Doorway width

W=门宽 Door width


门宽度尺寸:

(Door width)

$W=X+264$

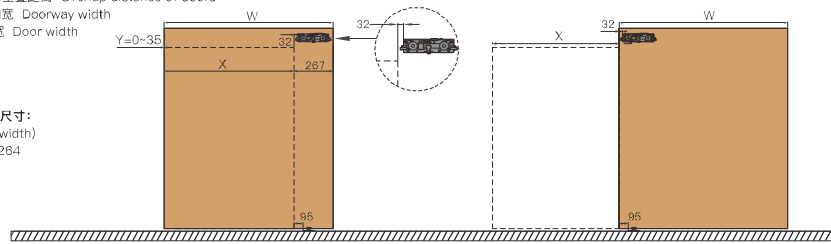

缓冲器安装尺寸 Damper installation size



木门模式二(门洞未全开) Wooden door installation mode2(door partially opening)


T=门宽-门洞尺寸 Door width-doorway width

X=门洞宽 Doorway width

W=门宽 Door width

$W=X+T$

$T \geq 150\text{mm}$

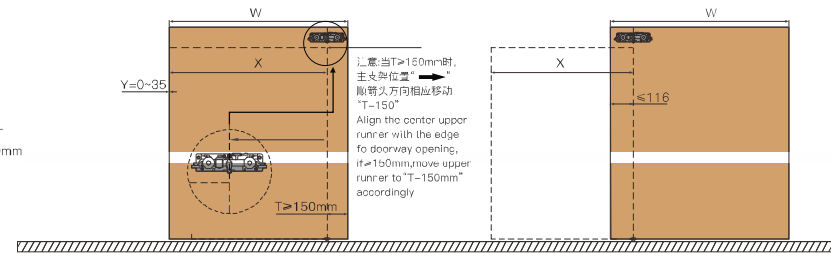

缓冲器安装尺寸 Damper installation size

