

S23-16

小全拉缓冲滑轨带插销(16板)



TWO-SECTION FULL EXTENSION SOFT CLOSE SLIDE WITH PIN FOR 16MM PANEL

载重: 20公斤 Load capacity: 20Kg
 长度: 250-450mm Length: 250-450mm
 抽屉高度调节量0~+3mm Drawer height adjustment:0~+3mm




滑轨安装尺寸 Installation dimensions

SKW=抽屉内宽度 Internal drawer width
 LW=柜内宽度 Internal cabinet width
 NL=滑轨标称长度 Nominal length
 LT=柜内深度 Internal cabinet depth
 抽屉尺寸和钻孔 Drawer size and boring


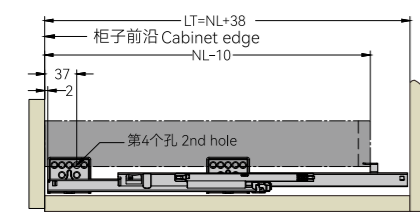
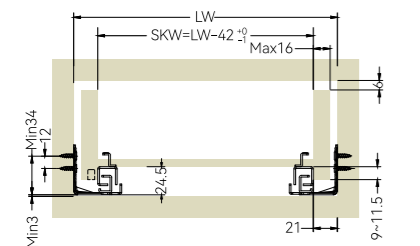


外置抽屉 Standard drawer

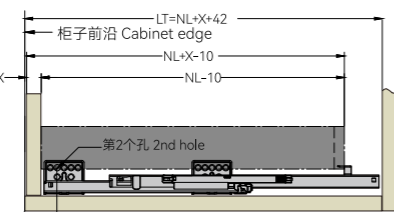



内置抽屉 Internal drawer

NL(mm)	250	300	350	400	450
插销孔距 Pins hole A(mm)	65	90	95	120	135
高度调节孔距 Height adjustment hole B(mm)	45	70	75	100	115



抽屉尺寸和钻孔(mm) Drawer size and drilling

滑轨安装孔位 Hole position

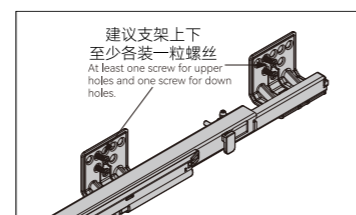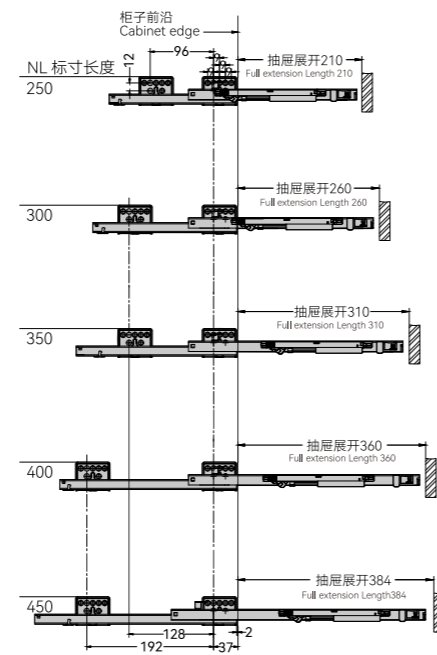

S23-18

小全拉缓冲滑轨带插销(18板)



TWO-SECTION FULL EXTENSION SOFT CLOSE SLIDE WITH PIN FOR 18MM PANEL

载重: 20公斤 Load capacity: 20Kg
 长度: 250-450mm Length: 250-450mm
 抽屉高度调节量0~+3mm Drawer height adjustment:0~+3mm




滑轨安装尺寸 Installation dimensions

SKW=抽屉内宽度 Internal drawer width
 LW=柜内宽度 Internal cabinet width
 NL=滑轨标称长度 Nominal length
 LT=柜内深度 Internal cabinet depth
 抽屉尺寸和钻孔 Drawer size and boring


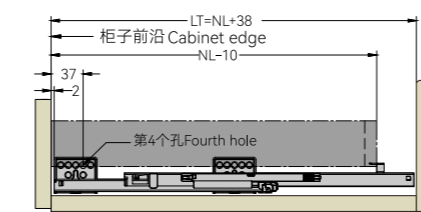
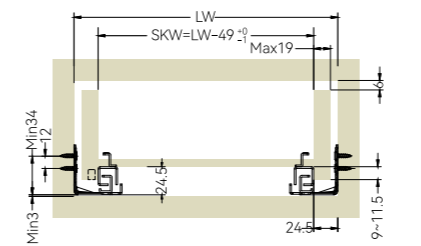


外置抽屉 Standard drawer

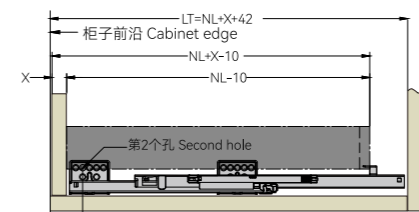



内置抽屉 Internal drawer

NL(mm)	250	300	350	400	450
插销孔距 Pins hole A(mm)	65	90	95	120	135
高度调节孔距 Height adjustment hole B(mm)	45	70	75	100	115



抽屉尺寸和钻孔(mm) Drawer size and drilling

滑轨安装孔位 Hole position

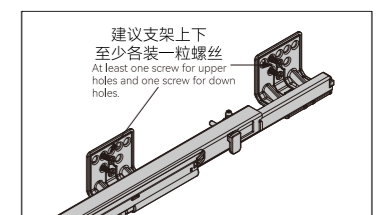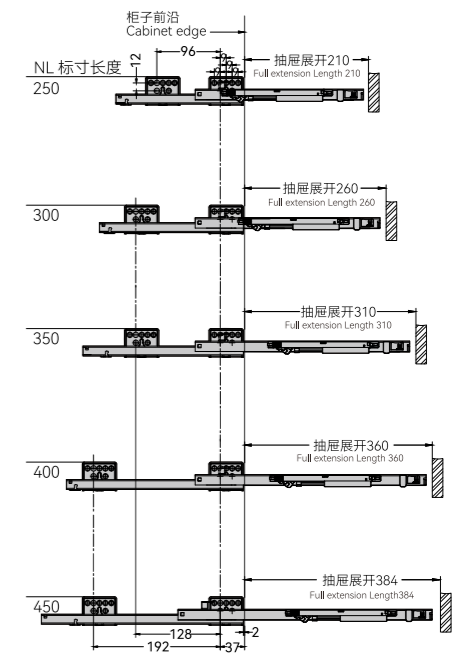

S23F-16

小全拉反弹滑轨带插销(16板)




TWO-SECTION FULL EXTENSION PUSH OPEN SLIDE WITH PIN FOR 16MM PANEL

载重: 20公斤 Load capacity: 20Kg
 长度: 250-450mm Length: 250-450mm
 抽屉高度调节量0~+3mm Drawer height adjustment:0~+3mm






滑轨安装尺寸 Installation dimensions

SKW=抽屉内宽度 Internal drawer width
 LW=柜内宽度 Internal cabinet width
 NL=滑轨标称长度 Nominal length
 LT=柜内深度 Internal cabinet depth
 抽屉尺寸和钻孔 Drawer size and boring

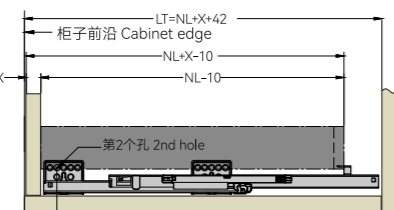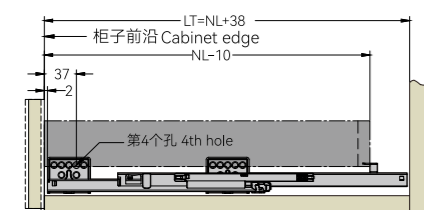
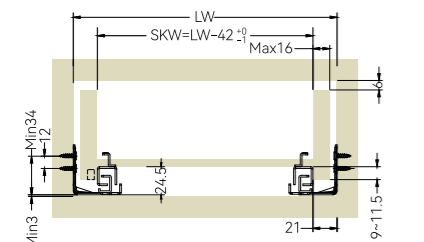


NL(mm)	250	300	350	400	450
插销孔距 Pins hole A(mm)	65	90	95	120	135
高度调节孔距 Height adjustment hole B(mm)	45	70	75	100	115



抽屉尺寸和钻孔(mm) Drawer size and drilling

滑轨安装孔位 Hole position

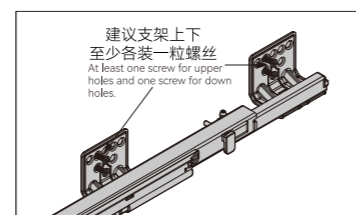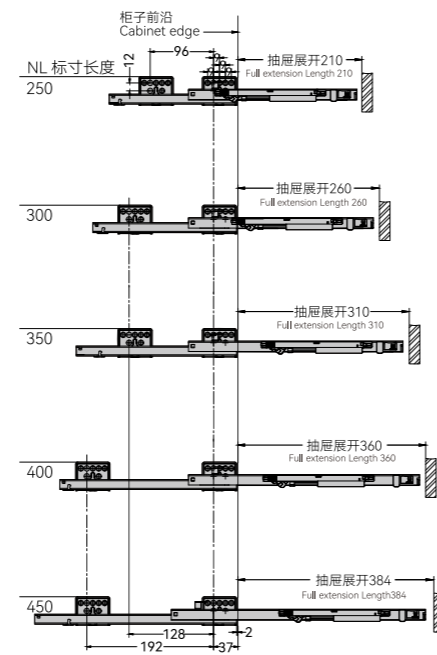

S23F-18




小全拉反弹滑轨带插销(18板)

TWO-SECTION FULL EXTENSION PUSH OPEN SLIDE WITH PIN FOR 18MM PANEL




载重: 20公斤 Load capacity: 20Kg
 长度: 250-450mm Length: 250-450mm
 抽屉高度调节量0~+3mm Drawer height adjustment:0~+3mm

滑轨安装尺寸 Installation dimensions

SKW=抽屉内宽度 Internal drawer width
 LW=柜内宽度 Internal cabinet width
 NL=滑轨标称长度 Nominal length
 LT=柜内深度 Internal cabinet depth
 抽屉尺寸和钻孔 Drawer size and boring

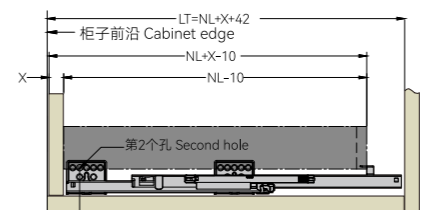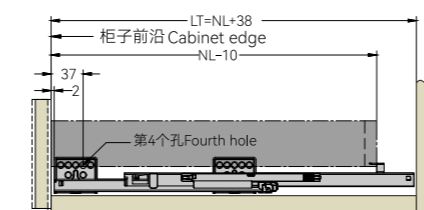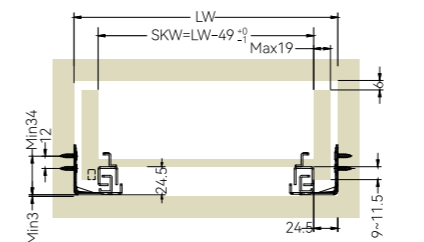

NL(mm)	250	300	350	400	450
插销孔距 Pins hole A(mm)	65	90	95	120	135
高度调节孔距 Height adjustment hole B(mm)	45	70	75	100	115



抽屉尺寸和钻孔(mm) Drawer size and drilling

滑轨安装孔位 Hole position

