


S42H800

美式三节带把手缓冲同步滑轨(18板)

FULL EXTENSION SOFT CLOSING FACE FRAME SLIDE WITH LOCK FOR 18MM PANEL


载重: 35公斤(18")
 长度: 305-610mm
 抽屉高度调节量0~+3mm
 抽屉前后调节量0~+5mm(15~24")
 抽屉左右调节量±1.5mm

Load capacity: 35Kg
 Length: 305-610mm
 Drawer height adjustment: 0~+3mm
 Drawer depth adjustment: 0~+5mm(15~24")
 Drawer width adjustment: ±1.5mm





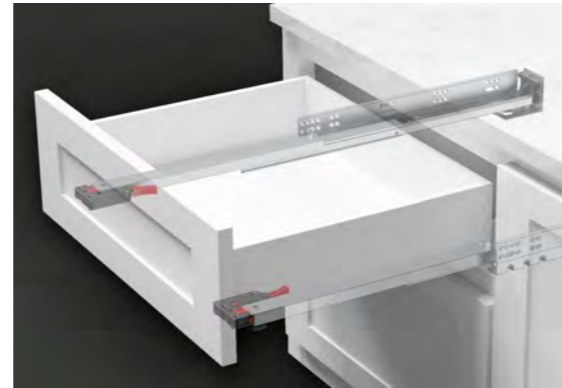


滑轨安装尺寸 Installation specifications

SKW=抽屉内宽度 Internal drawer width
 LW=柜内宽度 Internal cabinet width
 NL=滑轨标称长度 Nominal length
 LT=柜内深度 Internal cabinet depth
 抽屉尺寸和钻孔 Drawer size and drilling

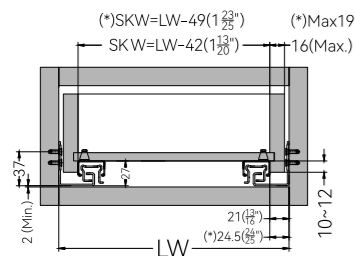

滑轨安装孔的位置(mm)
Hole position

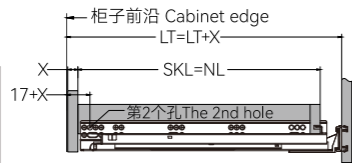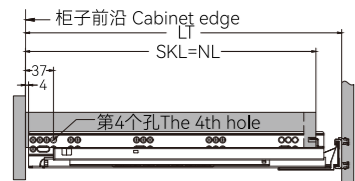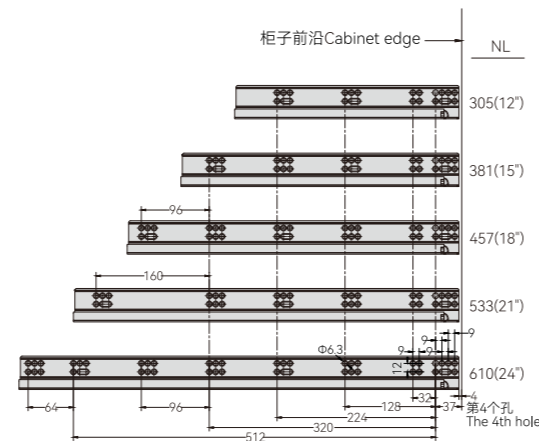



外置抽屉 Standard drawer

内置抽屉 Internal drawer

A(金属连接件)(Metal bracket)

B(塑胶连接件)(Plastic bracket)

抽屉尺寸和钻孔(mm) Drawer size and drilling

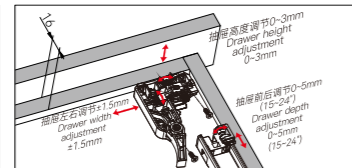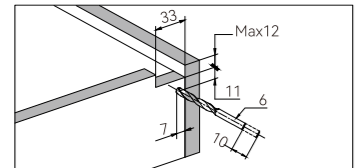

| 抽屉长度 Drawer length (SKL) | 柜体内部深度 Internal cabinet depth(LT) | | | |
|--------------------------------|-----------------------------------|-----|-------------------------------|-----|
| | A(金属连接件) (Metal bracket) | | B(塑胶连接件) (Plastic bracket) | |
| | *Min | Max | *Min | Max |
| 305(12") | 326 | 369 | 337 | 369 |
| 381(15") | 402 | 445 | 413 | 445 |
| 457(18") | 478 | 521 | 489 | 521 |
| 533(21") | 554 | 597 | 565 | 597 |
| 610(24") | 631 | 674 | 642 | 674 |

| 柜体内部深度 Internal cabinet depth(LT) | A(金属连接件) (Metal bracket) | B(塑胶连接件) (Plastic bracket) | (无连接件) (None bracket) |
|-----------------------------------|-----------------------------|-------------------------------|--------------------------|
| | *Min | Max | *Min |
| NL+20 | | | |


S42P800

美式三节带把手反弹缓冲同步滑轨(18板)(同步杆)

FULL EXTENSION PUSH OPEN & SOFT CLOSING FACE FRAME SLIDE WITH LOCK FOR 18MM PANEL


载重: 35公斤(18")
 长度: 381-610mm
 抽屉高度调节量0~+3mm
 抽屉前后调节量+4~-2mm
 抽屉左右调节量±1.5mm

Load capacity: 35Kg
 Length: 381-610mm
 Drawer height adjustment: 0~+3mm
 Drawer depth adjustment: +4~-2mm
 Drawer width adjustment: ±1.5mm




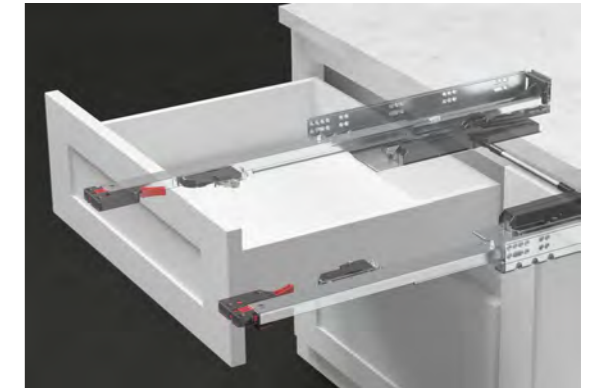


滑轨安装尺寸 Installation specifications

SKW=抽屉内宽度 Internal drawer width
 LW=柜内宽度 Internal cabinet width
 LW≥290mm(不带同步杆)(Without stabilizer bar)
 414≤LW≤1200mm(带同步杆)(With stabilizer bar)
 NL=滑轨标称长度 Nominal length
 LT=柜内深度 Internal cabinet depth
 抽屉尺寸和钻孔 Drawer size and drilling

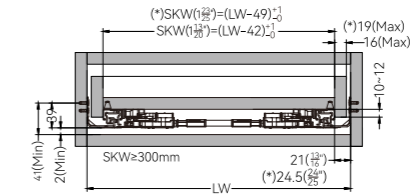

滑轨安装孔的位置(mm)
Hole position

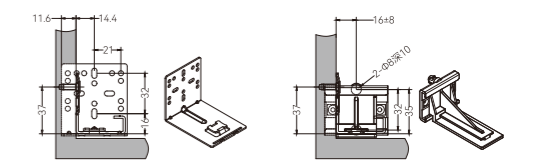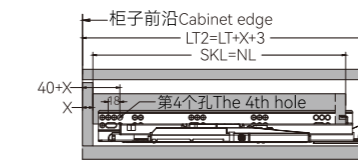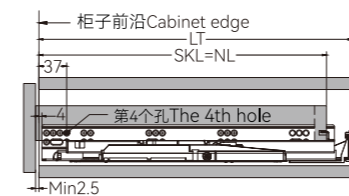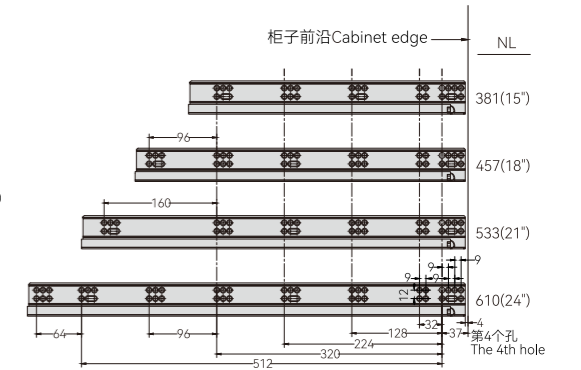



外置抽屉 Standard drawer

内置抽屉 Internal drawer

A(金属连接件)(Metal bracket)

B(塑胶连接件)(Plastic bracket)


抽屉尺寸和钻孔(mm) Drawer size and drilling

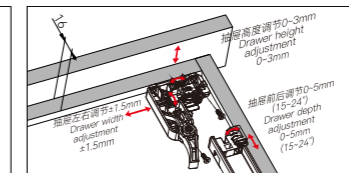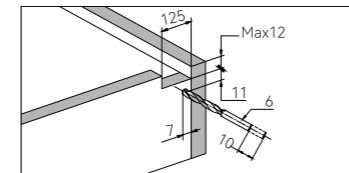


| 抽屉长度 Drawer length (SKL) | 柜体内部深度 Internal cabinet depth(LT) | | | |
|--------------------------------|-----------------------------------|-----|-------------------------------|-----|
| | A(金属连接件) (Metal bracket) | | B(塑胶连接件) (Plastic bracket) | |
| | *Min | Max | *Min | Max |
| 381(15") | 402 | 445 | 413 | 445 |
| 457(18") | 478 | 521 | 489 | 521 |
| 533(21") | 554 | 597 | 565 | 597 |
| 610(24") | 631 | 674 | 642 | 674 |

| 柜体内部深度 Internal cabinet depth(LT) | A(金属连接件) (Metal bracket) | B(塑胶连接件) (Plastic bracket) | (无连接件) (None bracket) |
|-----------------------------------|-----------------------------|-------------------------------|--------------------------|
| | *Min | Max | *Min |
| NL+20 | | | |

同步杆安装步骤 Installation steps for synchronizing bar:

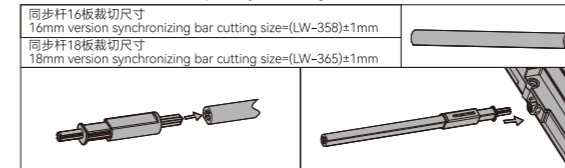

建议触碰范围 Suggested touching range

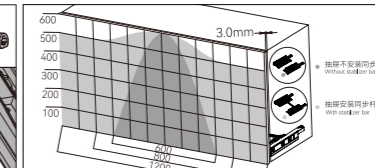

抽屉面板缝隙调节(+4~-2mm) Front panel gap adjustment(+4~-2mm)

