



Super Luminescent Light Emitting Diodes Module (14 pins)

Features

- Low Spectral Ripple, Broad Bandwidth
- Industry-standard, 14 Pin Butterfly Package
- Wavelength 750 ~ 1600nm
- λ of 1310nm,1490nm,1550nm
- Built -in TEC, Thermistor
- Low Polarization Sensitivity
- RoHs Compliant

Application

- Fiber Optic Gyroscopes
- Light Source
- Sensor
- Optical Communications System
- Test equipment

Absolute Maximum Ratings (Tc=25°C .unless otherwise specified)


Parameter	Symbol	Min.	Max.	Unit	Test Condition
Storage Temperature	Tstg	-40	+85	°C	-
Operating Temperature	Tc	-20	+70	°C	-
Forward Current	If	-	600	mA	CW

TEC Voltage	V_C	-	3.5	V	-
TEC Current	I_C	-2	+2	A	-
TEC Set Temperature	T_S	10	35	°C	-
Thermistor Temperature	T_{th}	-	100	°C	ATC operation
Laser Forward Voltage	V_f	-	3	V	-
Laser Reverse Voltage	V_r	-	2	V	-
Environmental Operating Humidity	X_{op}	-	95	%	Top < 30°C
Environmental Storage Humidity	X_{st}	-	95	%	Top < 30°C
Fiber Yield Strength		-	30	nm	-
Fiber Bend Radius		-	1	kgf	-
Lead Soldering Time	T_{sold}	260 / 10		°C / Sec	-


Specifications (electrical & optical characteristics)

Parameter	Symbol	Min	Typ.	Max.	Unit	Test Conditions
Operating Current	Iop	-	280	500	mA	CW
Thermistor Resistance	Rth	9.5	10	10.5	K Ω	25 $^{\circ}$ C
Thermoelectric Cooler Current	Icooler	-	-	1000	mA	Δ T=40K
Thermoelectric Cooler Voltage	Vcooler	-	-	2	V	Δ T=40K
Spectral Ripple	Δ	-	0.2	0.4	dB	CW, If = Iop
Full Width at Half Maximum	FWHM	40	-	-	nm	-
Central Wavelength	λ_c	λ_c-20		λ_c+20	nm	CW
Output Power	Po	-	-	10	mW	CW

Dimensions(nm) Pin Assignment

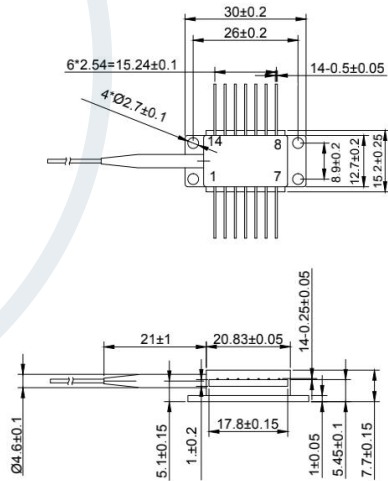

Pin	Description	Pin	Description
1	TEC (+)	8	NC
2	Thermistor	9	NC
3	NC	10	SLED (+)
4	NC	11	SLED (-)
5	Thermistor	12	NC
6	NC	13	Case
7	NC	14	TEC (-)

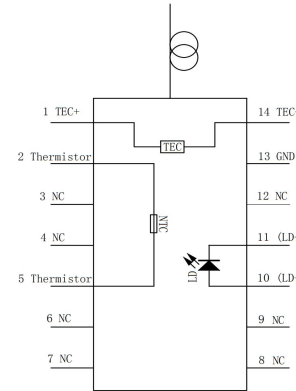

Order Information

GTA9001 series laser

1310nm SLED butterfly laser module

Please let us know


- 1: output power
- 2: fiber type
- 3: connector



Please let us know your request details before order.

** If you have your own Pin Assignment request .

Kindly share it with us before order .



Customize for you

