

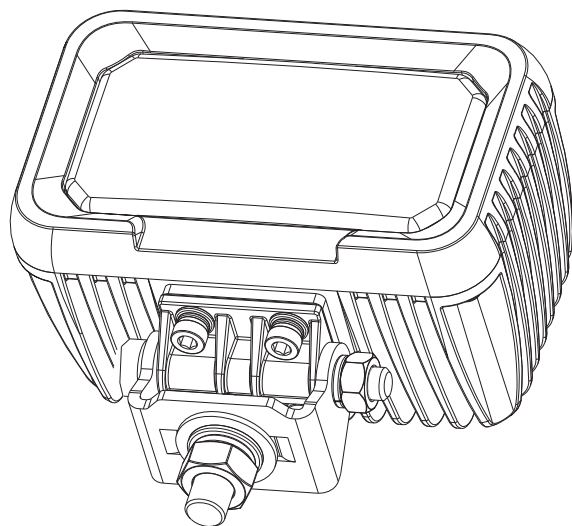
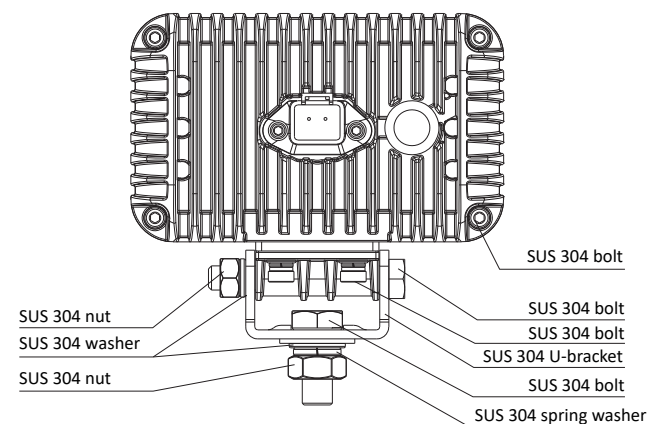


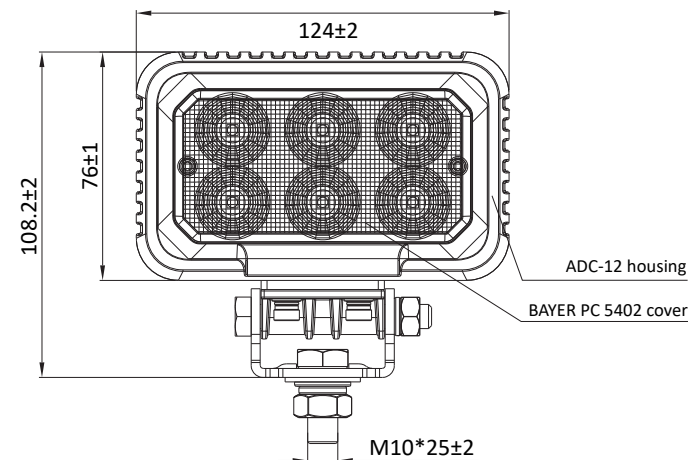

SPECIFICATION	
Nominal power	60W
Effective power	33±4W
Luminous flux	3500±200LM
Color temperature	5500-6500K
EMC	CISPR 25 CLASS 5
Operating temperature	-40°C ~ +85°C
Operating voltage	12-36V
Reverse connection protection	12-36V
Vibration	15G, 25-55Hz, sweep frequency
Corrosion	Neutral salt spray 126H
Transient impact	76V, 20ms
Beam angle	flood
Ingress protection	IP68
Surface treatment	powder spray
Lifespan	30000H

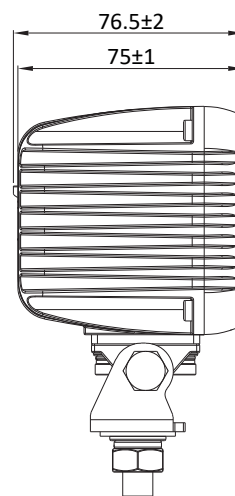

					Part No.		SM-5060-SFG			
					Name	Date	Version	V1	PROJECT	
					Design		Material		Ratio	1:1
Revision	Revision date	Revision mark		Draw			Surface treatment		Net Weight	
Revision Record				Audit			佛山市三目汽车照明科技有限公司 SAMMOON VEHICLE LIGHTING TECHNOLOGY CO., LTD			
ERP		Drawing No.		Approve						