


LED Side marker lamp

Item no.SM-7010-SWB

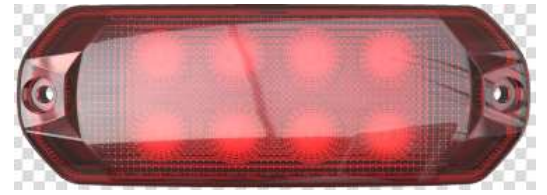

Function and performance	Parameters
Dimension (mm)	L166.5 * W58 * T23 mm L6.56" x W2.28" x T0.9" mm
Function	Position light+stop light, Red color
Working voltage	12VDC /24VDC
Rated power	10W
Consumed power	Stop light: 5W, Position light: 1.4W
Working temperature	-40°C ~ +65°C
Waterproof and Dustproof	IP67
Corrosion resistance	Neutral salt spray test 126h
Withstand voltage test	15VDC, 60Min
Reverse polarity protection	15VDC, 10Min
Vibration strength	9G
Life span	25000h, Light attenuation < 10%. working for 10000h
Regulation	ECE-R7, FMVSS 108
Wiring method	Integrate DT connector with open wire, wire length 250mm, Connector DT04-2P, Teflon red and black wire. RED: positive electrode (+), BLACK: negative electrode (-)
Installation method	Built-in install, Embedded 2-M5*70 screw, the distance between two mounting holes is 150mm.
Application	Construction machinery、 Agricultural equipment、 Automobile
Packaging	White color box,1set/box, 20sets/carton (10 Pairs)