


Rear combination light

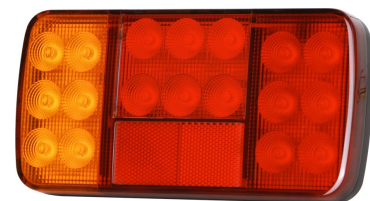

Item no. SM-LG-8024C-L
SM-LG-8024C-R

Function & performance	Parameters
Item no.	SM-LG-8024C-L SM-LG-8024C-R
Dimension:	L192 * W97.5 * T27.5 mm L7.55" x W3.83" x T1.08" Inch
Function:	Position light: 1W*9pcs (Red light) Stop light: 1W*6pcs (Red light) Turn signals: 1W*8pcs, (Amber 1700K) Retro-reflector
Theoretical power:	Position light: 5W, Red light 5000K Stop light: 6W, Red light, 5000K Turn signals: 8W, Amber light, 1700K Retroreflector
Working Voltage:	12V DC
Rated Power:	19W
Working temperature:	-40°C ~ +65°C
Waterproof and Dustproof:	IP65
Light distribution:	ECE R6, R7
Life span:	≥25000h
Mounting method:	Embedded install with Screws, M5 bolt, the distance between two mounting holes is 55mm, Hole R5
Wiring method:	Direct wiring, wire length 300mm
Application:	Engineering vehicle, Special vehicle
Packaging:	White color box, 2set/box, 12sets/carton (6 Pairs)