


# Signal light of Bumper

Item no. SM-SY19022-A

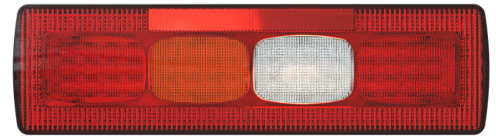

Function and performance	Parameters
Item no.	<b>SM-SY19022-A</b>
Dimension	L480 * W133 * T78 (not including M5 bolt exposed 35.5mm) L18.89" x W5.24" x T3.07" Inch
Function and Light color (Led lamp chip)	<p><b>Position light:</b> OSRAM chip 0.1W*42pcs (Color temperature 5700-6500K), Red &amp; Transparent;</p> <p><b>Turn signals:</b> OSRAM chip 0.5W*12pcs (Color temperature 3000K), Amber &amp; Transparent;</p> <p><b>Stop light:</b> OSRAM chip 0.5W*12pcs (Color temperature 5700-6500K), Red &amp; Transparent;</p> <p><b>Reversing light:</b> OSRAM chip 0.5W*12pcs (Color temperature 5700-6500K), Colourless &amp; Transparent</p> <p><b>Fog light:</b> OSRAM chip 0.5W*12pcs (Color temperature 5700-6500K), Red &amp; Transparent;</p> <p><b>Side marker light:</b> OSRAM chip 0.5W*1pcs (Color temperature 3000K), Amber &amp; Transparent;</p> <p><b>License plate light:</b> OSRAM Led lamp chip 0.5W*2pcs (Color temperature 5700-6500K),</p> <p><b>Retroreflector:</b> the same with other functional color</p>
Rated power	29.7W, Power 4.2+6+6+6+6+0.5+1 W
Working voltage	24V DC
Mounting size	Embedded bolt 4-M6 Distance between four holes (length: 390mm, width: 75mm)
Wire harness	Embedded connector: 1718230-1 (can be revised as customer' s request)
Working temperature	-40°C- +65°C
Waterproof and Dustproof	IP67
Life span	> 25000h
Regulation	<p>All lights conform to CCC&amp;ECE, details pls see the test report. Backup lights conform to GB 15235-2007&amp;ECE R23.</p> <p>Rear turning signal conform to GB17509-2008&amp;ECE R6 2a.</p> <p>Brake light conform to GB5920-2008&amp;ECE R7 S1.</p> <p>Rear position light conform to GB5920-2008&amp;ECE R7.</p> <p>Rear foglight conform to GB 11554-2008&amp;ECE R38.</p> <p>License plate light conform to GB 18408-2015&amp;ECE R4.</p> <p>Side marker conform to GB 18099-2013&amp;ECE R91.</p>
Application	Heavy truck, Construction machinery, Special vehicle
Packaging	White color box, 2set/box, 12sets/carton (6 Pairs)