


Rear Signal light

Item no. SM-WD-003

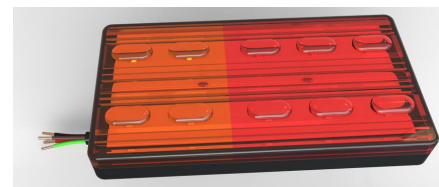

Function and performance	Parameters
Item no.	SM-WD-003
Function	Turn signals+ stop light
Dimension	L50 * W80 * T36.8mm L1.97" x W3.15" x T1.45" Inch
Mounting	M6 (Non-slip nut with tooth--304stainless steel)
Working voltage	12V
Theoretical power	4.4W, Turn signals 2W + Stop light 2.4W
Led lamp chip	Turn signals LED-0.5W*4PCS (Amber)
	Stop light LED-0.2W*12PCS (Red)
Current (12V)	Amber: 0.6-0.8W/ 0.05-0.07A Red (strong) : 0.6-0.8W/ 0.05-0.07A Red (weak) : 0.1-0.2W /0.01-0.02A
Luminous flux	Turn signals: 20-40LM Stop light: (Strong) 15-25 LM Stop light: (Weak) 4-8LM
Waterproof and Dustproof	IP67
Working temperature	-40~+85°C
Life span	20000h
Wiring method	Direct wiring, wires harness length: 200mm. Cable material: PVC, 20AWG
Mounting method	Embedded install with Screws, M6 bolt, the distance between two mounting holes are 100mm, Φ2 Holes. (Bolt-M6--Embedded injection)
Application	Truck、Engineering vehicle、Special vehicle
Packaging	White color box, 2set/box, 10sets/carton (5 Pairs)