



CWB7

High-precision multi-function weighing indicator



CWBR7
LED display



RS232 Scale interface






1



2



3

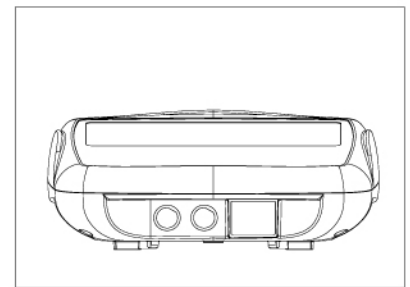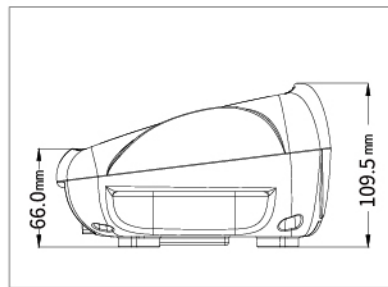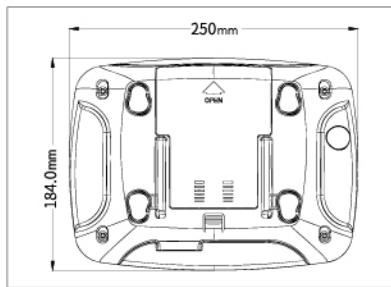

Features:

- Weighing, checkweighing, simple counting
- Auto-power off, power on zero-tracking
- Low battery indicator, charging status indicator
- Full tare
- Linearity calibration points
- A large LCD display, alphanumeric display
- Materials:** ABS housing

Applications:

Retail, food industry, logistics, etc

Approvals:



OIML No.: R76/2006-A-DK2-2019.03
FORCE No.: 0200-NAWI-03258
NTEP No.: 14-091A1
CE No.: CE-238

Options:

- Communication Port:** RS232 / RS485 / USB / BT
- Peripheral Devices:** Printer / Alarm light / Indicator stand



Alarm light
Signal lamp for visual support of weighing.



Printer
For printing weighing results, or for record keeping of weighing data with date and time print.



Indicator stand
Used for lifting weighing indicator, large three legged bracket with adjustable height (550-850mm)

Specifications:

Model	CWB7	
Accuracy	III	
Weighing Units	g, kg, T, lb, oz, pcs, tj	
Battery	6V/4AH battery up to 80 hours	
Power	Adapter 100V-240V, 12V/1A	
System	Metric system	Imperial system
Display	40mm LCD display, with LED backlit	1 5/8" high LCD display, with LED backlit
Operate Temp	-10 °C to 40 °C	14 °F to 104 °F
Packing Size	184mm x 250mm x 109.5mm	7 1/4" W x 9 7/8" L x 4 3/8" H
Gross Weight	1.8kg	4 lb