




中国认可
国际互认
检测
TESTING
CNAS L3163

CE&UKCA EMC Test Report

Project No. : 2308C217
Equipment : Handheld Inkjet Printer
Brand Name : 
Test Model : BT-HH6105 B, B35
Series Model : BT-HH6105 B(1), BT-HH6105 B(2), BT-HH6105 B(3), BT-HH6105 E, BT-HH6105 EL, BT-HH6105 F, BT-HH6105 G, BT-HH6105 D(2), BT-HH6105 D(3), BT-HH6105 A(2), BT-HH6105 A(3), BT-HH6105 C(2), BT-HH6105 C(3), BT-HH6105 D, T20, T26, T30, T36, B30, B30E, B31, B32, B33, B35E, B36, B37, B38, B39HD, B39DW
Applicant : Zhuhai Bentsai Electronics Co., Ltd.
Address : 2/F, Block B, Factory Building 1, 115 Huawei Road, Xiangzhou District, Zhuhai
Manufacturer : Zhuhai Bentsai Electronics Co., Ltd.
Address : 2/F, Block B, Factory Building 1, 115 Huawei Road, Xiangzhou District, Zhuhai
Factory : Zhuhai Bentsai Electronics Co., Ltd.
Address : 2/F, Block B, Factory Building 1, 115 Huawei Road, Xiangzhou District, Zhuhai
Date of Receipt : Aug. 30, 2023
Date of Test : Aug. 31, 2023 ~ Sep. 21, 2023
Issued Date : Oct. 16, 2023
Report Version : R00
Test Sample : Engineering Sample No.: DG2023083041, DG2023083057
Standard(s) : EN 55032:2015+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A2:2021
EN 55035:2017+A11:2020

BS EN 55032:2015+A11:2020
BS EN IEC 61000-3-2:2019+A1:2021
BS EN 61000-3-3:2013+A2:2021
BS EN 55035:2017+A11:2020

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.(Dongguan).

Prepared by

:

Scott Xiang

Scott Xiang

Approved by

:

Kang Zhang

Kang Zhang

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by CNAS.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	10
2 . GENERAL INFORMATION	11
2.1 GENERAL DESCRIPTION OF EUT	11
2.2 DESCRIPTION OF TEST MODES	12
2.3 EUT OPERATING CONDITIONS	13
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.5 DESCRIPTION OF SUPPORT UNITS	14
3 . EMC EMISSION TEST	15
3.1 RADIATED EMISSIONS UP TO 1 GHZ	15
3.1.1 LIMITS	15
3.1.2 MEASUREMENT INSTRUMENTS LIST	15
3.1.3 TEST PROCEDURE	16
3.1.4 DEVIATION FROM TEST STANDARD	16
3.1.5 TEST SETUP	16
3.1.6 MEASUREMENT DISTANCE	17
3.1.7 TEST RESULTS	18
3.2 RADIATED EMISSIONS ABOVE 1 GHZ	24
3.2.1 LIMITS	24
3.2.2 MEASUREMENT INSTRUMENTS LIST	24
3.2.3 TEST PROCEDURE	25
3.2.4 DEVIATION FROM TEST STANDARD	25
3.2.5 TEST SETUP	25
3.2.6 MEASUREMENT DISTANCE	26
3.2.7 TEST RESULTS	27
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	33
3.3.1 LIMITS	33
3.3.2 MEASUREMENT INSTRUMENTS LIST	33
3.3.3 TEST PROCEDURE	33
3.3.4 DEVIATION FROM TEST STANDARD	33
3.3.5 TEST SETUP	34
3.3.6 TEST RESULTS	35
3.4 HARMONIC CURRENT EMISSIONS TEST	39
3.4.1 LIMITS	39
3.4.2 MEASUREMENT INSTRUMENTS LIST	39
3.4.3 TEST PROCEDURE	39

Table of Contents	Page
3.4.4 DEVIATION FROM TEST STANDARD	39
3.4.5 TEST SETUP	39
3.4.6 TEST RESULTS	40
3.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST	43
3.5.1 LIMITS	43
3.5.2 MEASUREMENT INSTRUMENTS LIST	43
3.5.3 TEST PROCEDURE	43
3.5.4 DEVIATION FROM TEST STANDARD	43
3.5.5 TEST SETUP	44
3.5.6 TEST RESULTS	45
4 . EMC IMMUNITY TEST	46
4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	46
4.2 GENERAL PERFORMANCE CRITERIA	49
4.3 ANNEX B (NORMATIVE) - PRINT FUNCTION	50
4.3.1 PERFORMANCE CRITERIA	50
4.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	51
4.4.1 TEST SPECIFICATION	51
4.4.2 MEASUREMENT INSTRUMENTS	51
4.4.3 TEST PROCEDURE	51
4.4.4 DEVIATION FROM TEST STANDARD	52
4.4.5 TEST SETUP	52
4.4.6 TEST RESULTS	53
4.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	57
4.5.1 TEST SPECIFICATION	57
4.5.2 MEASUREMENT INSTRUMENTS	57
4.5.3 TEST PROCEDURE	57
4.5.4 DEVIATION FROM TEST STANDARD	57
4.5.5 TEST SETUP	58
4.5.6 TEST RESULTS	59
4.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)	60
4.6.1 TEST SPECIFICATION	60
4.6.2 MEASUREMENT INSTRUMENTS	60
4.6.3 TEST PROCEDURE	60
4.6.4 DEVIATION FROM TEST STANDARD	60
4.6.5 TEST SETUP	61
4.6.6 TEST RESULTS	62
4.7 SURGE IMMUNITY TEST (SURGE)	63
4.7.1 TEST SPECIFICATION	63
4.7.2 MEASUREMENT INSTRUMENTS	63
4.7.3 TEST PROCEDURE	63
4.7.4 DEVIATION FROM TEST STANDARD	64
4.7.5 TEST SETUP	64
4.7.6 TEST RESULTS	65

Table of Contents	Page
4.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY	
FIELDS TEST (CS)	66
4.8.1 TEST SPECIFICATION	66
4.8.2 MEASUREMENT INSTRUMENTS	66
4.8.3 TEST PROCEDURE	66
4.8.4 DEVIATION FROM TEST STANDARD	67
4.8.5 TEST SETUP	67
4.8.6 TEST RESULTS	68
4.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)	69
4.9.1 TEST SPECIFICATION	69
4.9.2 MEASUREMENT INSTRUMENTS	69
4.9.3 TEST PROCEDURE	69
4.9.4 DEVIATION FROM TEST STANDARD	69
4.9.5 TEST SETUP	70
4.9.6 TEST RESULTS	71
4.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY	
TEST (DIPS)	72
4.10.1 TEST SPECIFICATION	72
4.10.2 MEASUREMENT INSTRUMENTS	72
4.10.3 TEST PROCEDURE	72
4.10.4 DEVIATION FROM TEST STANDARD	72
4.10.5 TEST SETUP	72
4.10.6 TEST RESULTS	73
5 . EUT TEST PHOTO	74

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-EMC-1-2308C217	R00	Original Report.	Oct. 16, 2023	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission			
Standard(s)	Test Item		Result
EN 55032:2015+A11:2020 BS EN 55032:2015+A11:2020	Radiated emissions up to 1 GHz		PASS
	Radiated emissions above 1 GHz		PASS
	Radiated emissions from FM receivers		N/A
	Conducted emissions AC mains power port		PASS
	Asymmetric mode conducted emissions	AAN	N/A
		Current Probe	N/A
		CP+CVP	N/A
	Conducted differential voltage emissions		N/A

Standard(s)	Test Item	Result
EN IEC 61000-3-2:2019+A1:2021 BS EN IEC 61000-3-2:2019+A1:2021	Harmonic current	PASS
EN 61000-3-3:2013+A2:2021 BS EN 61000-3-3:2013+A2:2021	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017+A11:2020 BS EN 55035:2017+A11:2020	IEC 61000-4-2:2008	ESD	PASS
	IEC 61000-4-3:2020	RS	PASS
	IEC 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+AMD1:2017	Surge	PASS
	IEC 61000-4-6:2013	CS	PASS
	IEC 61000-4-8:2009	PFMF	PASS
	IEC 61000-4-11:2020	Dips	PASS

Standard(s)	Section	Test Item	Result
EN 55035:2017+A11:2020 BS EN 55035:2017+A11:2020	4.2.7	BIN-R	N/A
	4.2.7	BIN-I	N/A

NOTE:

(1) "N/A" denotes test is not applicable to this device.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB02 (3m)	CISPR	30MHz ~ 200MHz	V	4.34
		30MHz ~ 200MHz	H	3.38
		200MHz ~ 1,000MHz	V	4.80
		200MHz ~ 1,000MHz	H	4.16

B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB02 (3m)	CISPR	1GHz ~ 6GHz	4.38

C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C01	CISPR	150kHz ~ 30MHz	2.98

D. Harmonic current / Voltage fluctuations (Flicker) measurement:

Test Site	Method	Item	U (%)
DG-C01	EN IEC 61000-3-2 EN 61000-3-3	Voltage	0.757
		Current	0.592

E. Immunity Measurement:

Test Site	Method	Item	U
DG-SR02	IEC 61000-4-2	Rise time tr	7.00%
		Peak current Ip	6.50%
		Current at 30 ns	6.60%
		Current at 60 ns	6.80%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.2dB
DG-SR05	IEC 61000-4-4	Peak voltage (VP)	3.8%
		Rise time (tr)	4.4%
		Pulse width(tw)	4.2%
		Pulse Freq.(kHz)	0.7%
		Burst Duration(ms)	1.5%
		Burst Period(ms)	1.4%
		Peak voltage (VP)-with clamp	3.9%
		Rise time (tr) -with clamp	4.4%
		Pulse width(tw) -with clamp	4.2%
DG-SR05	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	4.0%
		Open circuit front time (1.2/50us)	6.2%
		Open circuit time of half value (1.2/50us)	4.7%
DG-CB06	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.28dB
DG-SR05	IEC 61000-4-8	Magnetic Field Strength	1.91%
DG-SR01	IEC 61000-4-11	DIP Amplitude	3.6%
		DIP Time Event	4.0%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.



1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By
Radiated emissions up to 1 GHz	24°C	52%	Kuly Lu
Radiated emissions above 1 GHz	24°C	52%	Kuly Lu
Conducted emissions AC mains power port	26°C	53%	Jeter Wang
Harmonic current	26°C	53%	Jeter Wang
Voltage fluctuations (Flicker)	26°C	53%	Jeter Wang

Test Item	Temperature	Humidity	Pressure	Tested By
ESD	27°C	48%	1013hPa	Ash Deng
RS	26°C	52%	/	Ash Deng
EFT	27°C	54%	/	Meers Zhang
Surge	27°C	54%	/	Meers Zhang
CS	22°C	53%	/	Farun Liang
PFMF	27°C	54%	/	Meers Zhang
Dips	26°C	62%	/	Oliver Wang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Handheld Inkjet Printer
Brand Name	
Test Model	BT-HH6105 B, B35
Series Model	BT-HH6105 B(1), BT-HH6105 B(2), BT-HH6105 B(3), BT-HH6105 E, BT-HH6105 EL, BT-HH6105 F, BT-HH6105 G, BT-HH6105 D(2), BT-HH6105 D(3), BT-HH6105 A(2), BT-HH6105 A(3), BT-HH6105 C(2), BT-HH6105 C(3), BT-HH6105 D, T20, T26, T30, T36, B30, B30E, B31, B32, B33, B35E, B36, B37, B38, B39HD, B39DW
Model Difference(s)	1) Cartridge height is different: 6105 series is half inch cartridge, B30 series is one inch cartridge. 2) The main control board is the same. 3) The power board is the same. 4) There is a little difference in the layout of the nozzle plate, and the principle is the same.
Power Source	DC voltage supplied from AC adapter. Model: JQS0242A-E090200
Power Rating	I/P: 100-240V~ 50/60Hz 0.7A O/P: 9.0V  2.0A
Connecting I/O Port(s)	1* USB port 1* DC port 1* Optical port
Classification of EUT	Class A
Highest Internal Frequency(Fx)	666MHz

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Operating
Mode 2	Charging

Radiated emissions up to 1 GHz Test	
Final Test Mode	Description
Mode 1	Operating
Mode 2	Charging

Radiated emissions Above 1 GHz Test	
Final Test Mode	Description
Mode 1	Operating
Mode 2	Charging

Conducted emissions AC mains power port Test	
Final Test Mode	Description
Mode 2	Charging

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 2	Charging

Immunity Test	
Final Test Mode	Description
Mode 1	Operating
Mode 2	Charging

Note:

1. According to the difference of the models, the model BT-HH6105 B test all items with mode 1 and mode 2, The model B35 test radiated/ESD/RS/PMF with mode 1 in AC 230V/50Hz.
2. For model BT-HH6105 B pretested Mode 1-Mode 2 in radiated, the worst case is Mode 2 and recorded.


2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. EUT connected to Adapter via DC Cable.
2. The USB 2.0 Hard Disk is plugged into EUT.
3. EUT connected to Sensor via Optical Cable.

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Mode 1

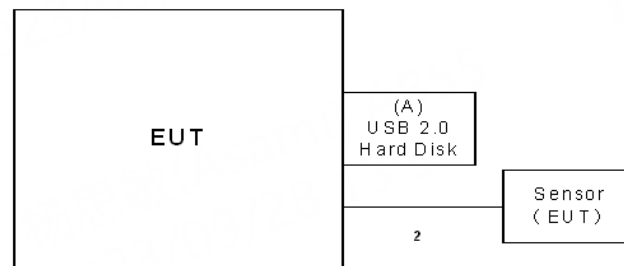

Ground Plane

Remote system

Mode 2

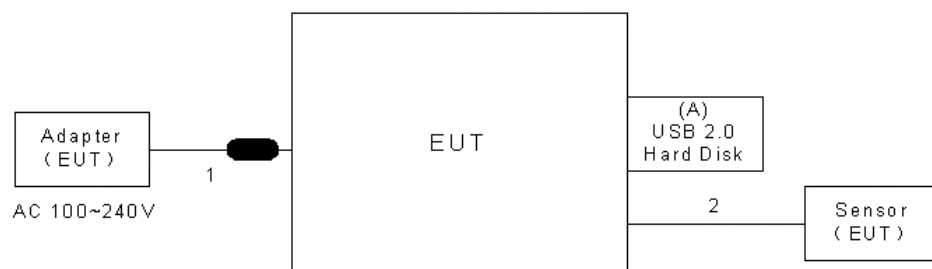

Ground Plane

Remote system

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	USB 2.0 Hard Disk	N/A	N/A	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	YES	1m
2	Optical Cable	NO	NO	0.8m

3. EMC EMISSION TEST

3.1 RADIATED EMISSIONS UP TO 1 GHZ

3.1.1 LIMITS

Class A equipment up to 1 GHz

Frequency Range MHz	Measurement			Class A limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	3	Quasi peak / 120 kHz	50
230 - 1000				57

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Amplifier	HP	8447D	1937A02847	Jan. 07, 2024
2	Cable	emci	LMR-400(30MHz-1 GHz)(10m+2.5m)	N/A	Apr. 19, 2024
3	Controller	MF	MF-7802BS	N/A	N/A
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	EMI Test Receiver	Keysight	N9038A	MY56400060	Jan. 07, 2024
6	Attenuator	SHX	TS2-6dB-6G-A	16101103	Jan. 30, 2024
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	9168-806	Jun. 17, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.1.3 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

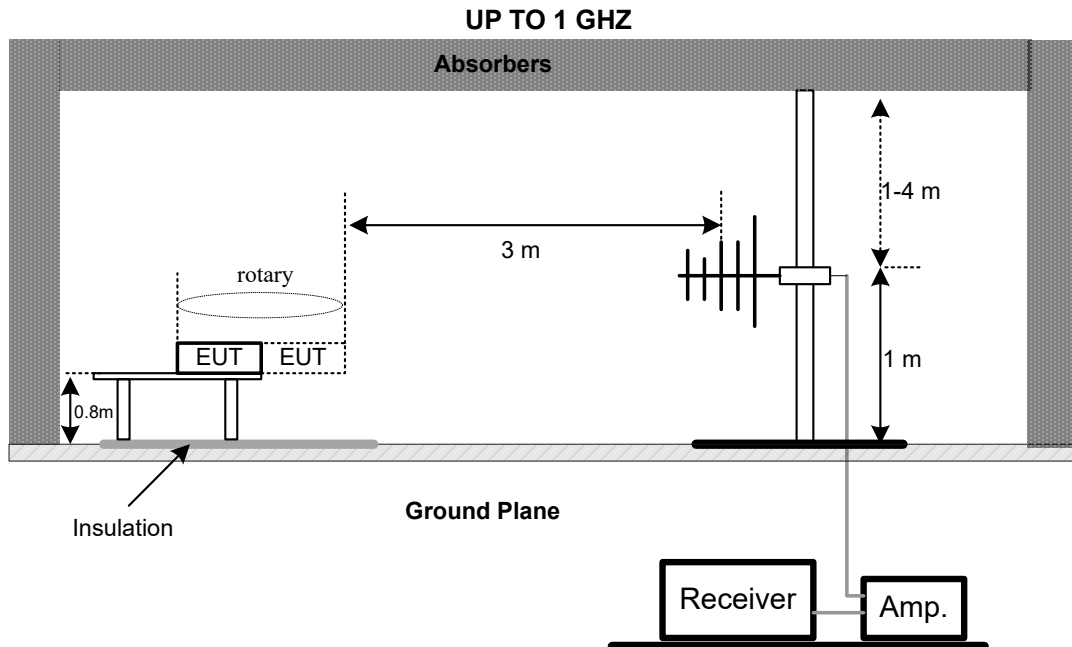

3.1.6 MEASUREMENT DISTANCE

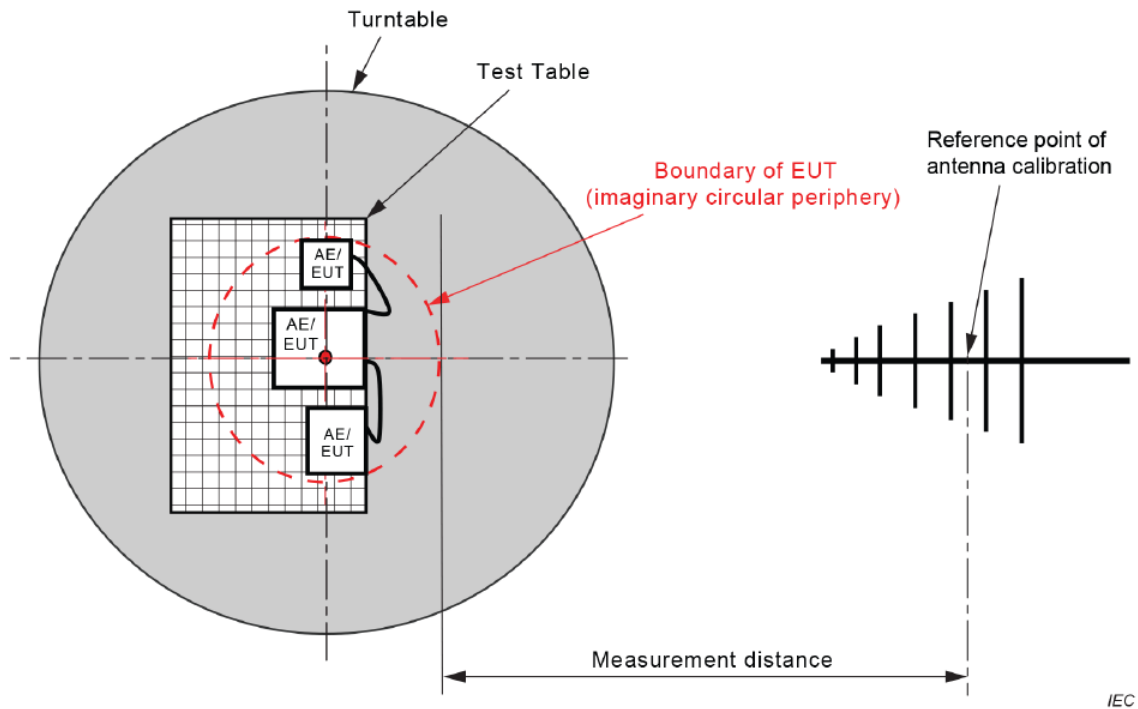


Figure C.1 – Measurement distance


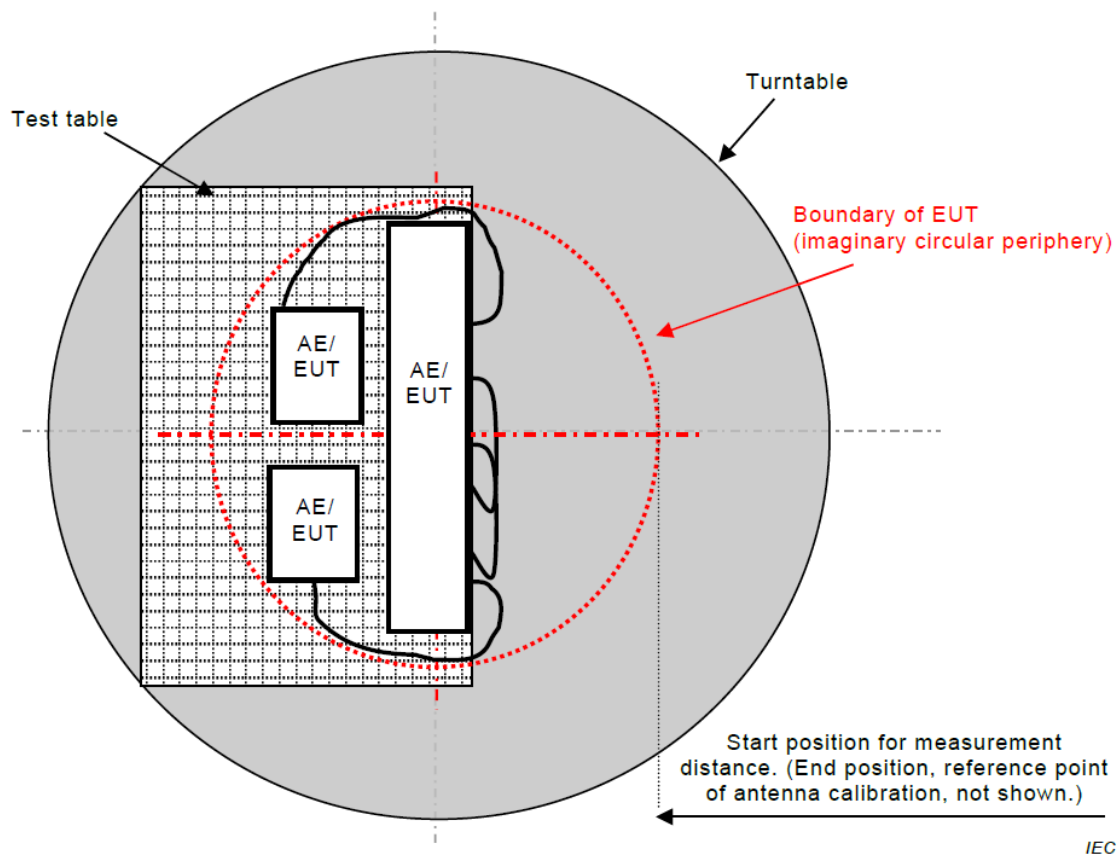


Figure C.2 – Boundary of EUT, Local AE and associated cabling


3.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2	Test Model	BT-HH6105 B

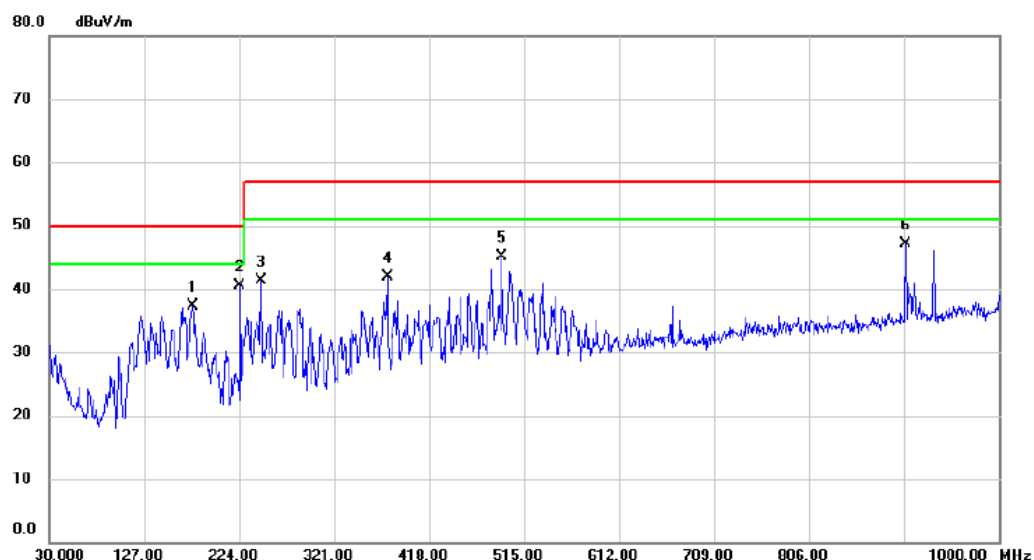


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		176.4700	44.40	-7.05	37.35	50.00	-12.65	QP	
2	*	224.9700	48.51	-7.92	40.59	50.00	-9.41	QP	
3		246.3100	48.27	-6.96	41.31	57.00	-15.69	QP	
4		375.3200	44.27	-2.35	41.92	57.00	-15.08	QP	
5		492.6900	44.27	0.87	45.14	57.00	-11.86	QP	
6		904.9400	38.72	8.40	47.12	57.00	-9.88	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2	Test Model	BT-HH6105 B

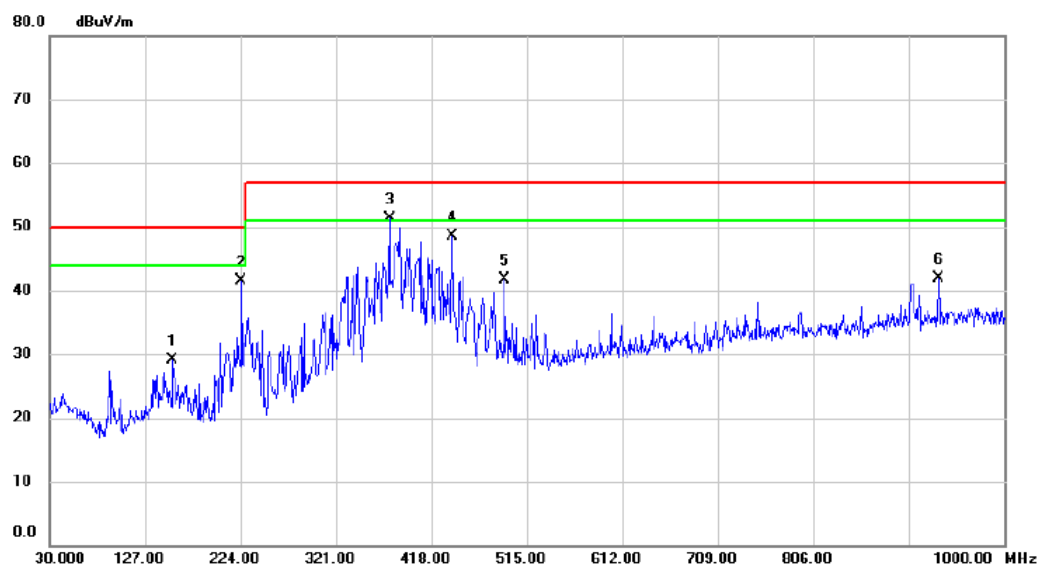


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	155.1300	35.00	-5.81	29.19	50.00	-20.81	QP	
2	224.9700	49.40	-7.92	41.48	50.00	-8.52	QP	
3 *	375.3200	53.71	-2.35	51.36	57.00	-5.64	QP	
4	439.3400	48.72	-0.23	48.49	57.00	-8.51	QP	
5	492.6900	40.76	0.87	41.63	57.00	-15.37	QP	
6	933.0700	33.30	8.67	41.97	57.00	-15.03	QP	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 2	Test Model	BT-HH6105 B

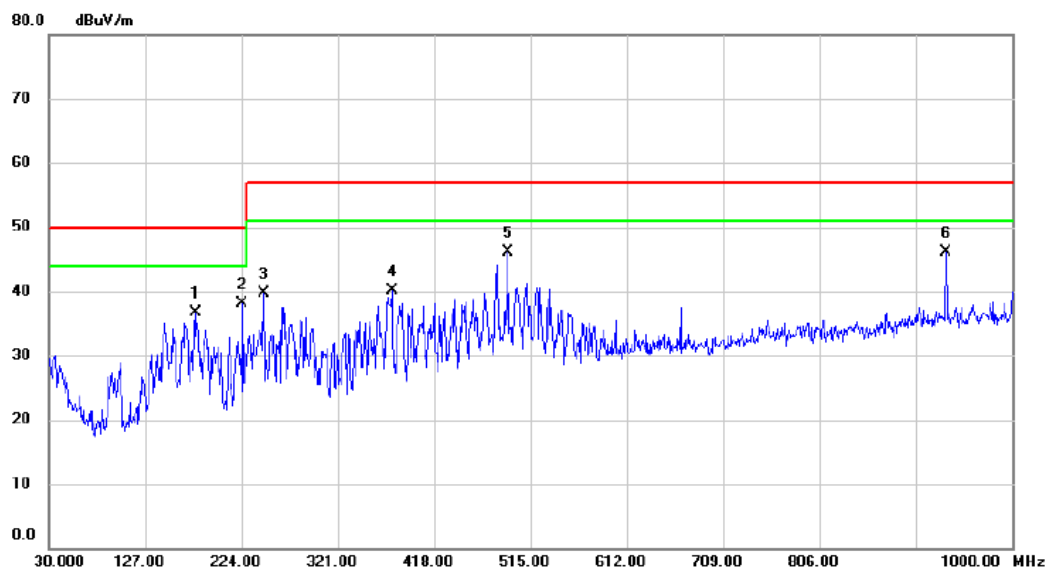


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	177.4400	43.81	-7.17	36.64	50.00	-13.36	QP	
2	224.9700	45.93	-7.92	38.01	50.00	-11.99	QP	
3	246.3100	46.59	-6.96	39.63	57.00	-17.37	QP	
4	375.3200	42.47	-2.35	40.12	57.00	-16.88	QP	
5	492.6900	45.14	0.87	46.01	57.00	-10.99	QP	
6 *	933.0700	37.37	8.67	46.04	57.00	-10.96	QP	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 2	Test Model	BT-HH6105 B

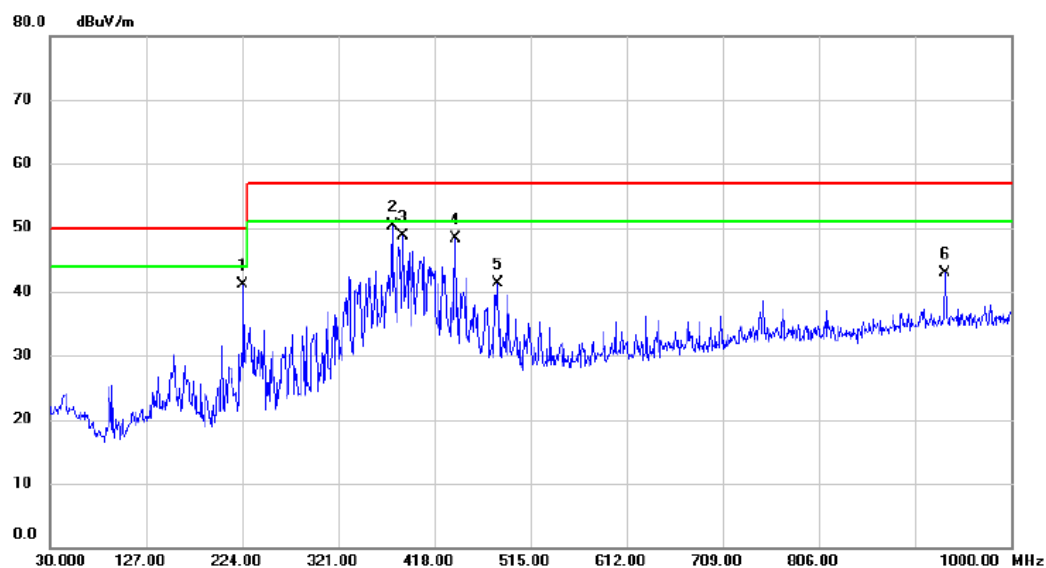


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		224.9700	48.98	-7.92	41.06	50.00	-8.94	QP	
2	*	375.3200	52.74	-2.35	50.39	57.00	-6.61	QP	
3		385.9900	50.71	-1.96	48.75	57.00	-8.25	QP	
4		439.3400	48.62	-0.23	48.39	57.00	-8.61	QP	
5		482.0200	40.71	0.68	41.39	57.00	-15.61	QP	
6		933.0700	34.33	8.67	43.00	57.00	-14.00	QP	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1	Test Model	B35

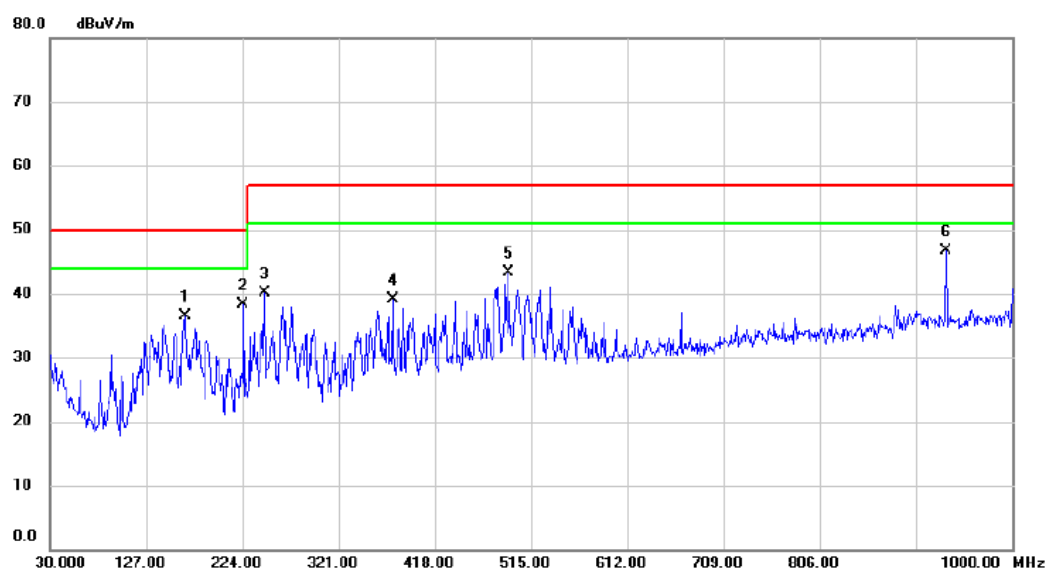

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	165.8000	42.48	-6.02	36.46	50.00	-13.54	QP	
2	224.9700	46.24	-7.92	38.32	50.00	-11.68	QP	
3	246.3100	47.04	-6.96	40.08	57.00	-16.92	QP	
4	375.3200	41.55	-2.35	39.20	57.00	-17.80	QP	
5	492.6900	42.47	0.87	43.34	57.00	-13.66	QP	
6 *	933.0700	37.98	8.67	46.65	57.00	-10.35	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1	Test Model	B35

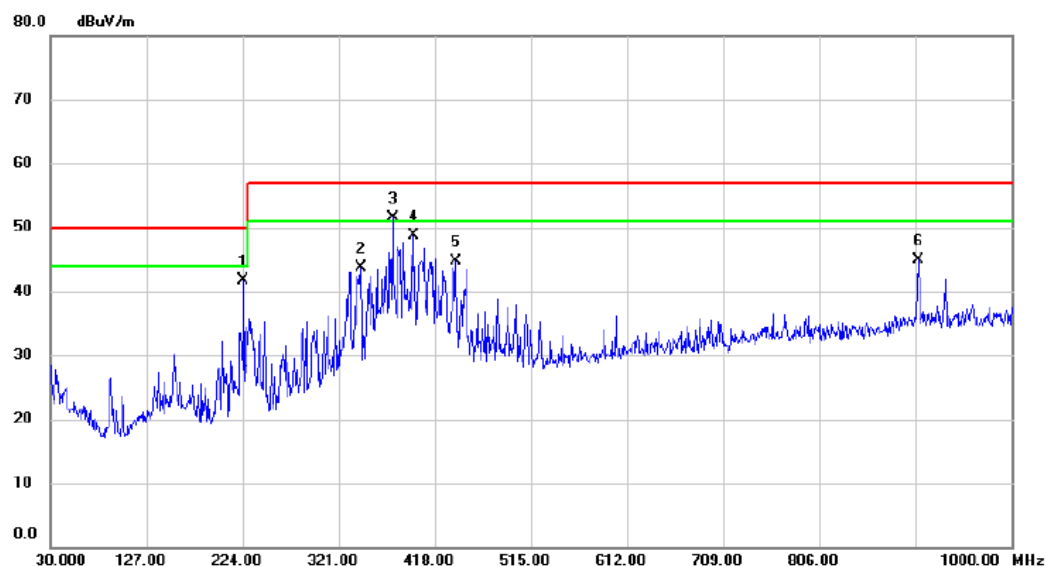

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		224.9700	49.56	-7.92	41.64	50.00	-8.36	QP	
2		343.3100	47.11	-3.46	43.65	57.00	-13.35	QP	
3	*	375.3200	53.77	-2.35	51.42	57.00	-5.58	QP	
4		396.6600	50.25	-1.58	48.67	57.00	-8.33	QP	
5		439.3400	44.89	-0.23	44.66	57.00	-12.34	QP	
6		905.9100	36.42	8.39	44.81	57.00	-12.19	QP	

3.2 RADIATED EMISSIONS ABOVE 1 GHZ

3.2.1 LIMITS

Class A equipment above 1 GHz

Frequency Range MHz	Measurement			Class A limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	56
3000 - 6000				60
1000 - 3000			Peak / 1 MHz	76
3000 - 6000				80

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F _x)	Highest measured frequency
F _x ≤ 108 MHz	1 GHz
108 < F _x ≤ 500 MHz	2 GHz
500 < F _x ≤ 1000 MHz	5 GHz
F _x > 1 GHz	5 x F _x up to a maximum of 6 GHz

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Horn Antenna	ARA	DRG-118A	16554	Apr. 14, 2024
2	Amplifier	Agilent	8449B	3008A02334	Jan. 07, 2024
3	Cable	mitron	RWLP50-4.0A-K J-SMSM-12M	N/A	May 05, 2024
4	Cable	RW	RWP50-402-SM SM-1M	20210802	Aug. 07, 2024
5	Controller	MF	MF-7802BS	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	EMI Test Receiver	Keysight	N9038A	MY56400060	Jan. 07, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.2.3 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation

3.2.5 TEST SETUP

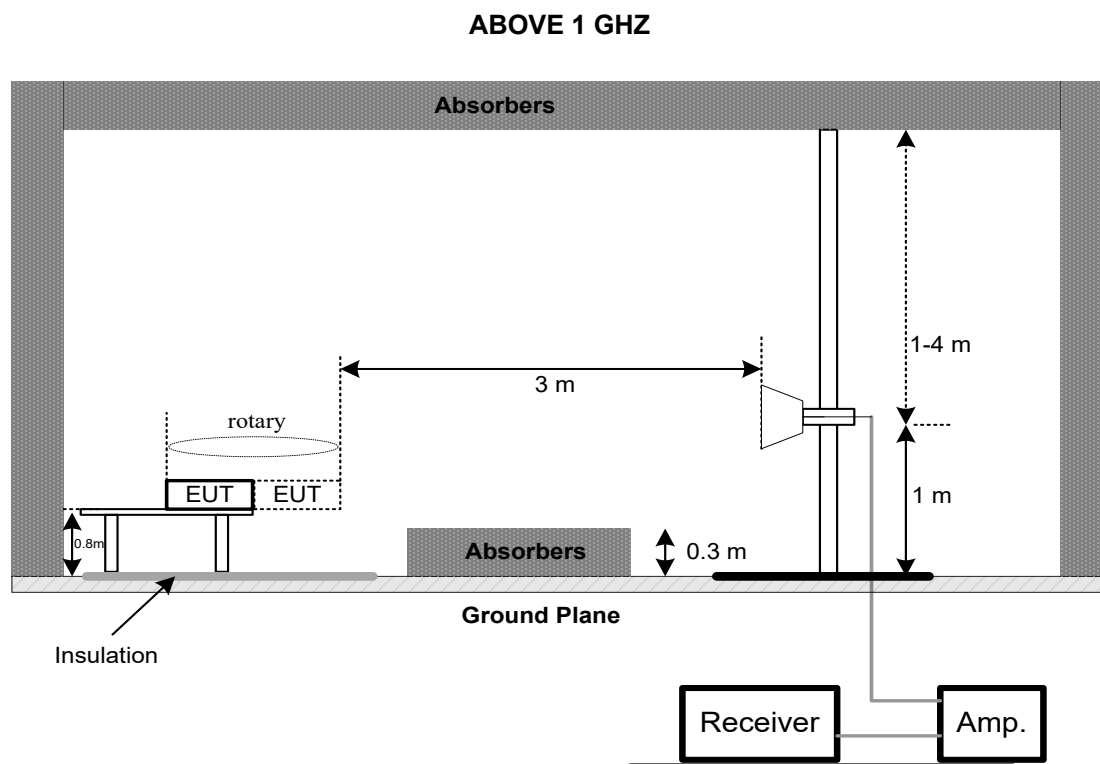

3.2.6 MEASUREMENT DISTANCE

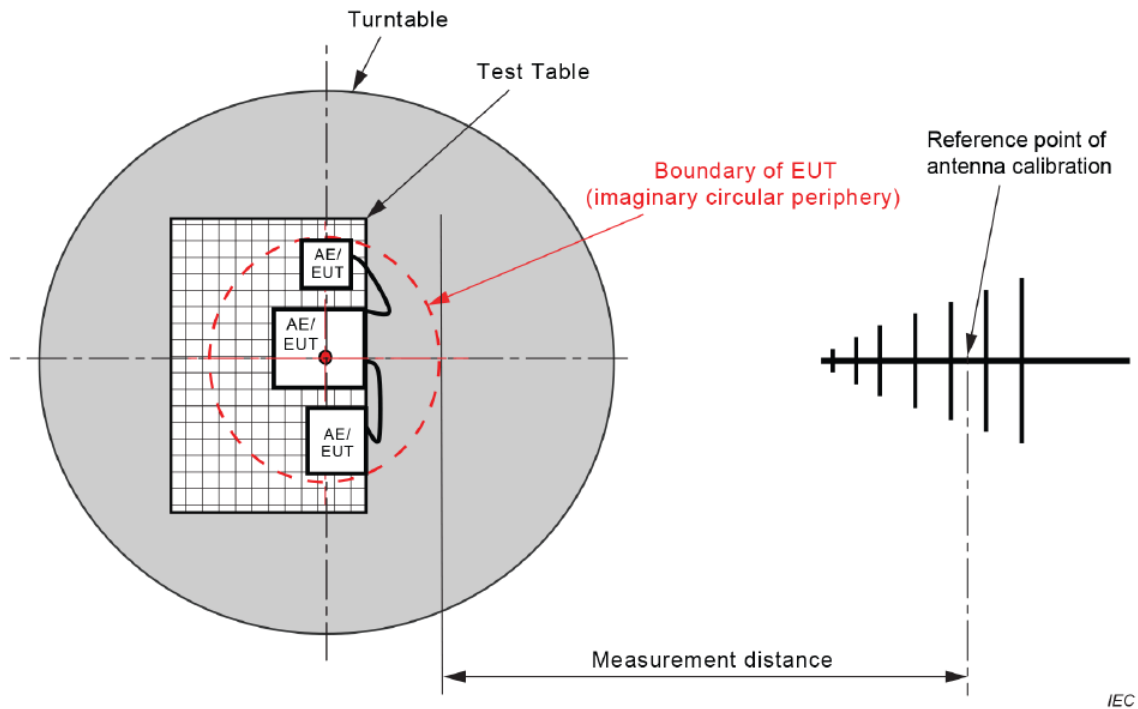


Figure C.1 – Measurement distance


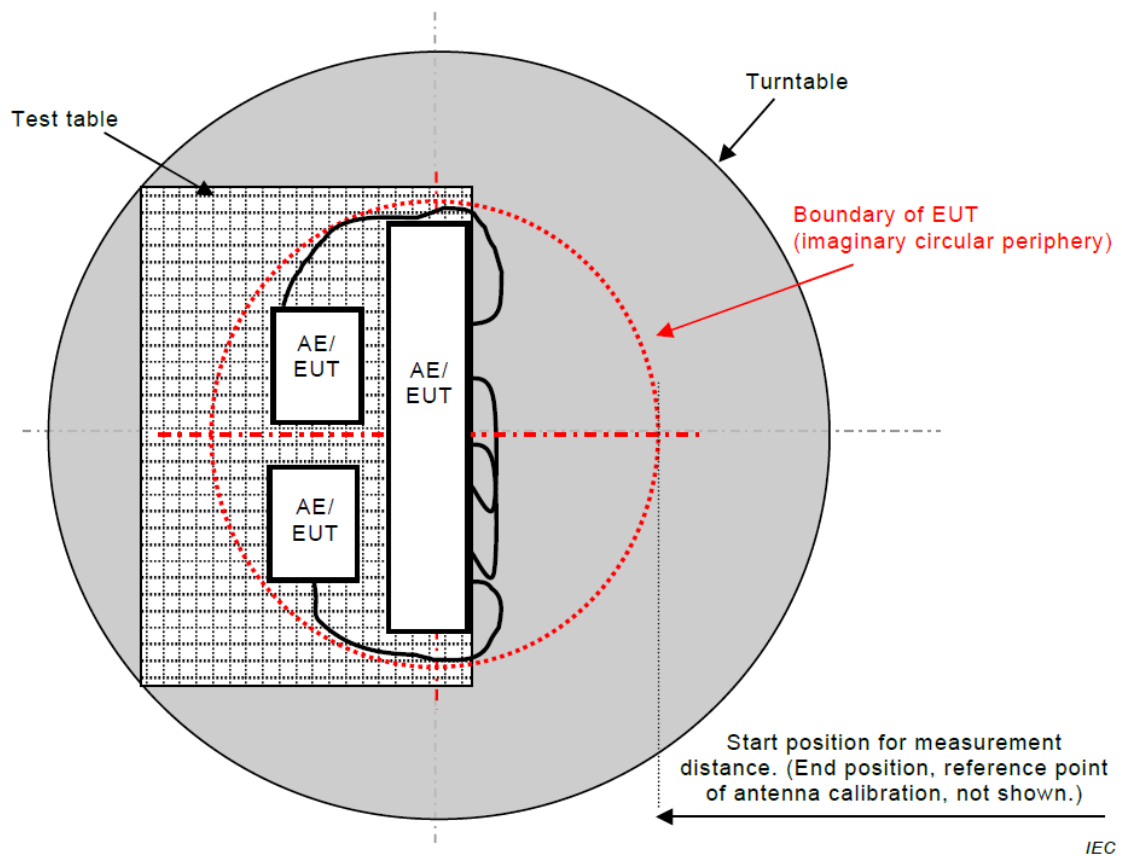


Figure C.2 – Boundary of EUT, Local AE and associated cabling


3.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2	Test Model	BT-HH6105 B

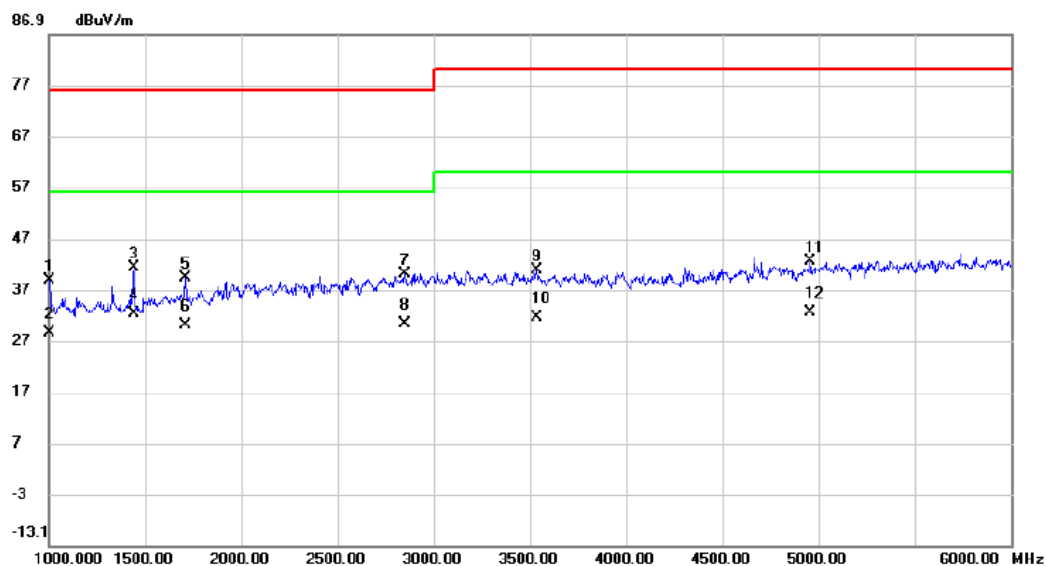


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	44.48	-5.69	38.79	76.00	-37.21	peak	
2		1000.000	34.18	-5.69	28.49	56.00	-27.51	AVG	
3		1440.000	45.12	-3.73	41.39	76.00	-34.61	peak	
4	*	1440.000	35.95	-3.73	32.22	56.00	-23.78	AVG	
5		1712.500	41.04	-1.76	39.28	76.00	-36.72	peak	
6		1712.500	31.82	-1.76	30.06	56.00	-25.94	AVG	
7		2850.000	37.02	3.09	40.11	76.00	-35.89	peak	
8		2850.000	27.17	3.09	30.26	56.00	-25.74	AVG	
9		3537.500	36.26	4.50	40.76	80.00	-39.24	peak	
10		3537.500	26.93	4.50	31.43	60.00	-28.57	AVG	
11		4957.500	33.45	9.04	42.49	80.00	-37.51	peak	
12		4957.500	23.59	9.04	32.63	60.00	-27.37	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2	Test Model	BT-HH6105 B

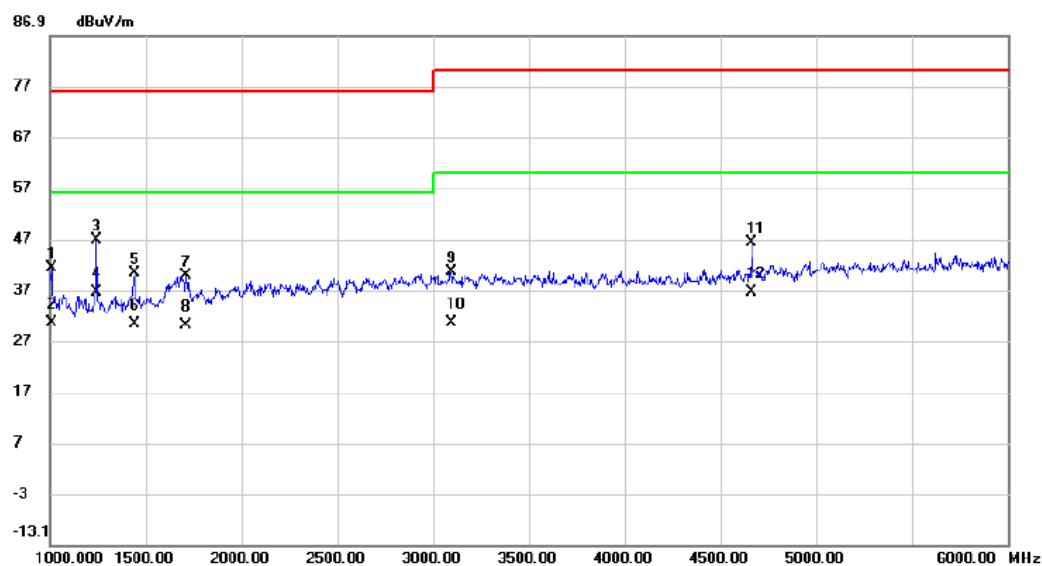


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1007.500	46.85	-5.66	41.19	76.00	-34.81	peak	
2		1007.500	36.20	-5.66	30.54	56.00	-25.46	AVG	
3		1245.000	51.42	-4.60	46.82	76.00	-29.18	peak	
4	*	1245.000	41.14	-4.60	36.54	56.00	-19.46	AVG	
5		1440.000	43.99	-3.73	40.26	76.00	-35.74	peak	
6		1440.000	33.92	-3.73	30.19	56.00	-25.81	AVG	
7		1712.500	41.62	-1.76	39.86	76.00	-36.14	peak	
8		1712.500	31.82	-1.76	30.06	56.00	-25.94	AVG	
9		3095.000	36.77	3.71	40.48	80.00	-39.52	peak	
10		3095.000	26.74	3.71	30.45	60.00	-29.55	AVG	
11		4665.000	38.82	7.56	46.38	80.00	-33.62	peak	
12		4665.000	28.93	7.56	36.49	60.00	-23.51	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 2	Test Model	BT-HH6105 B

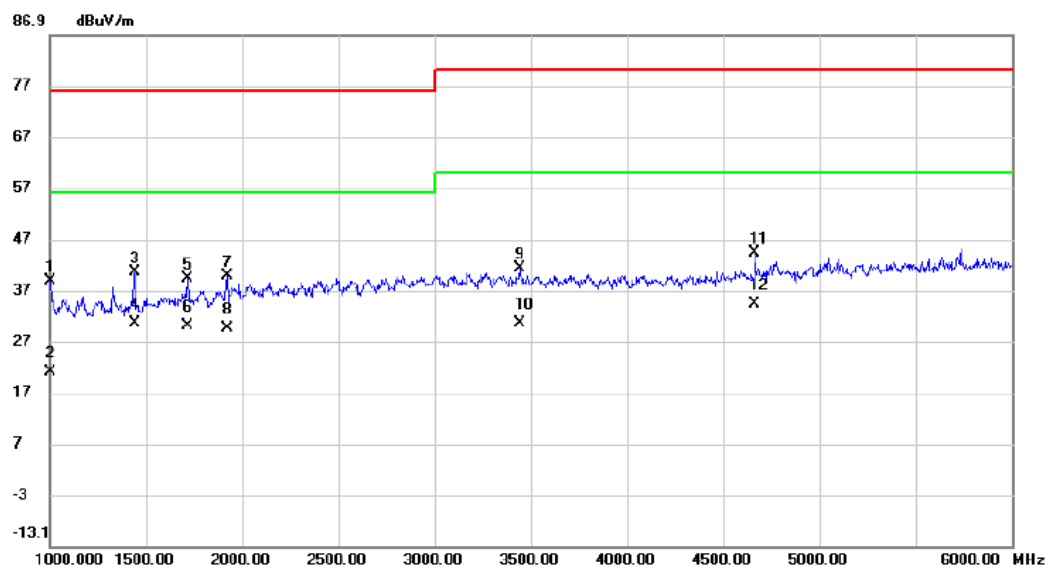


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		1000.000	44.59	-5.69	38.90	76.00	-37.10	peak	
2		1000.000	26.72	-5.69	21.03	56.00	-34.97	AVG	
3		1440.000	44.28	-3.73	40.55	76.00	-35.45	peak	
4	*	1440.000	34.17	-3.73	30.44	56.00	-25.56	AVG	
5		1717.500	41.08	-1.72	39.36	76.00	-36.64	peak	
6		1717.500	31.82	-1.72	30.10	56.00	-25.90	AVG	
7		1920.000	39.83	-0.10	39.73	76.00	-36.27	peak	
8		1920.000	29.74	-0.10	29.64	56.00	-26.36	AVG	
9		3442.500	36.92	4.32	41.24	80.00	-38.76	peak	
10		3442.500	26.17	4.32	30.49	60.00	-29.51	AVG	
11		4665.000	36.65	7.56	44.21	80.00	-35.79	peak	
12		4665.000	26.82	7.56	34.38	60.00	-25.62	AVG	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 2	Test Model	BT-HH6105 B

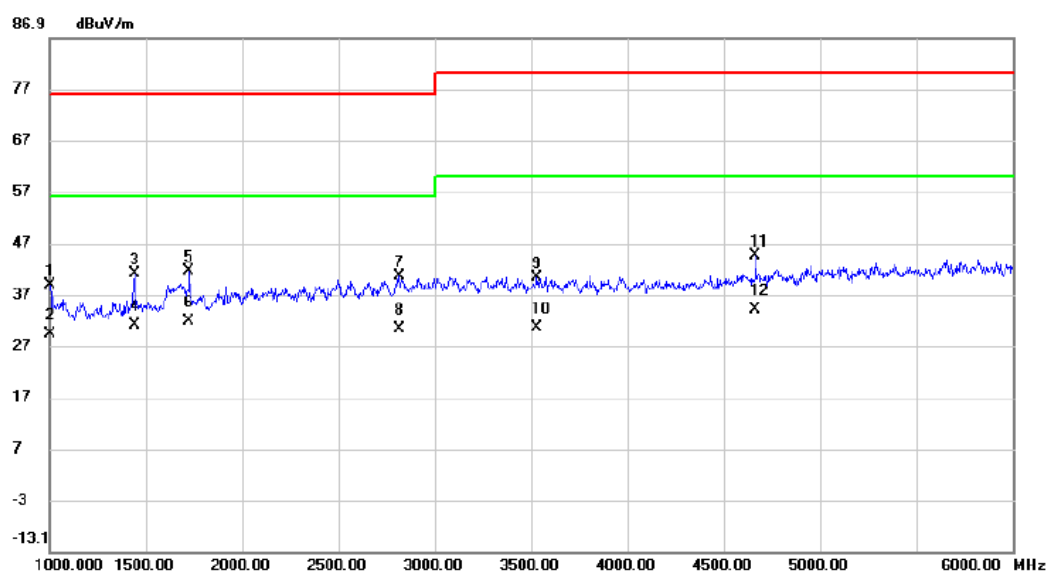


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	44.35	-5.69	38.66	76.00	-37.34	peak	
2		1000.000	34.92	-5.69	29.23	56.00	-26.77	AVG	
3		1440.000	44.64	-3.73	40.91	76.00	-35.09	peak	
4		1440.000	34.82	-3.73	31.09	56.00	-24.91	AVG	
5		1725.000	43.22	-1.65	41.57	76.00	-34.43	peak	
6	*	1725.000	33.38	-1.65	31.73	56.00	-24.27	AVG	
7		2817.500	37.41	3.00	40.41	76.00	-35.59	peak	
8		2817.500	27.20	3.00	30.20	56.00	-25.80	AVG	
9		3532.500	35.91	4.49	40.40	80.00	-39.60	peak	
10		3532.500	25.95	4.49	30.44	60.00	-29.56	AVG	
11		4665.000	36.96	7.56	44.52	80.00	-35.48	peak	
12		4665.000	26.47	7.56	34.03	60.00	-25.97	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1	Test Model	B35

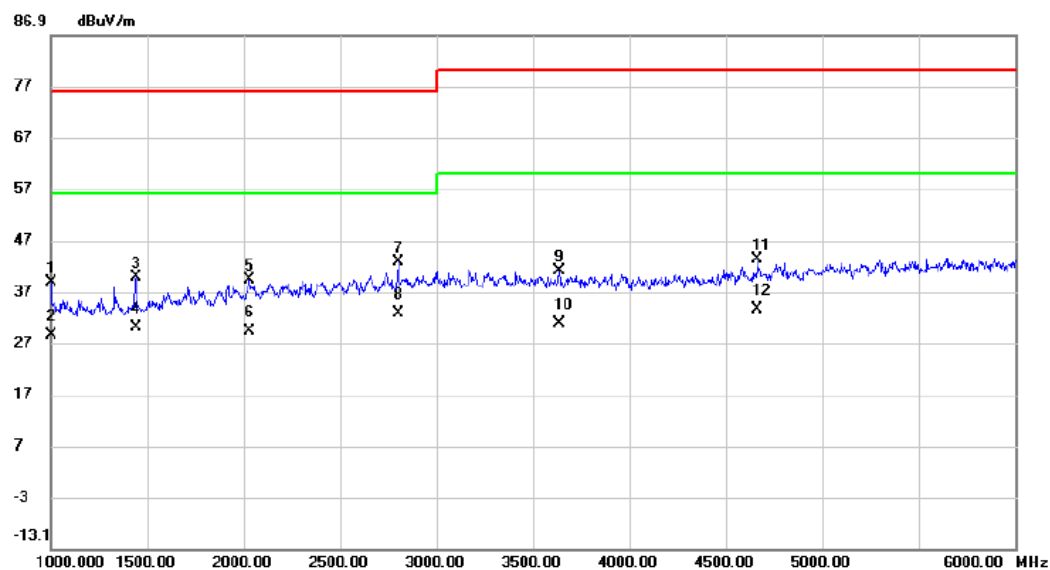

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	44.49	-5.69	38.80	76.00	-37.20	peak	
2		1000.000	34.14	-5.69	28.45	56.00	-27.55	AVG	
3		1440.000	43.53	-3.73	39.80	76.00	-36.20	peak	
4		1440.000	33.82	-3.73	30.09	56.00	-25.91	AVG	
5		2030.000	38.57	0.64	39.21	76.00	-36.79	peak	
6		2030.000	28.76	0.64	29.40	56.00	-26.60	AVG	
7		2800.000	39.85	2.94	42.79	76.00	-33.21	peak	
8	*	2800.000	29.76	2.94	32.70	56.00	-23.30	AVG	
9		3635.000	36.30	4.70	41.00	80.00	-39.00	peak	
10		3635.000	26.17	4.70	30.87	60.00	-29.13	AVG	
11		4665.000	35.61	7.56	43.17	80.00	-36.83	peak	
12		4665.000	25.92	7.56	33.48	60.00	-26.52	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1	Test Model	B35

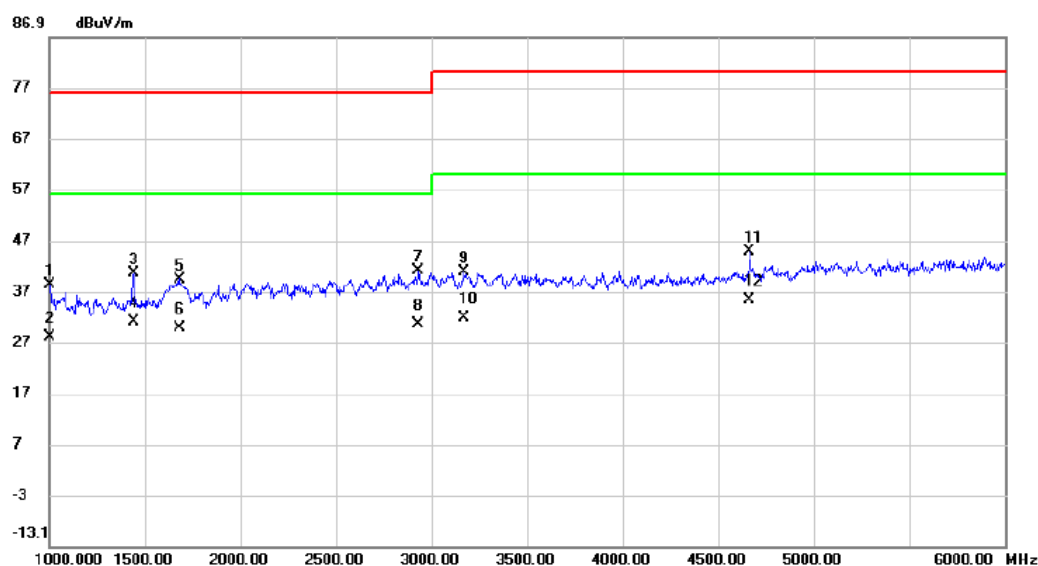

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	43.97	-5.69	38.28	76.00	-37.72	peak	
2		1000.000	33.76	-5.69	28.07	56.00	-27.93	AVG	
3		1440.000	44.34	-3.73	40.61	76.00	-35.39	peak	
4		1440.000	34.85	-3.73	31.12	56.00	-24.88	AVG	
5		1680.000	41.42	-2.02	39.40	76.00	-36.60	peak	
6		1680.000	31.92	-2.02	29.90	56.00	-26.10	AVG	
7		2930.000	37.61	3.33	40.94	76.00	-35.06	peak	
8		2930.000	27.17	3.33	30.50	56.00	-25.50	AVG	
9		3172.500	37.02	3.84	40.86	80.00	-39.14	peak	
10		3172.500	27.92	3.84	31.76	60.00	-28.24	AVG	
11		4665.000	37.11	7.56	44.67	80.00	-35.33	peak	
12	*	4665.000	27.77	7.56	35.33	60.00	-24.67	AVG	

3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class A equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class A Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	79
0.5 - 30			73
0.15 - 0.5	AMN	Average / 9 kHz	66
0.5 - 30			60

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100526	Jun. 16, 2024
2	EMI Test Receiver	R&S	ESR3	101862	Jan. 07, 2024
3	Cable	N/A	RG400	N/A(12m)	Mar. 01, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	50Ω coaxial switch	Anritsu	MP59B	6201078100	Jan. 07, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.3.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.4 DEVIATION FROM TEST STANDARD


No deviation

3.3.5 TEST SETUP

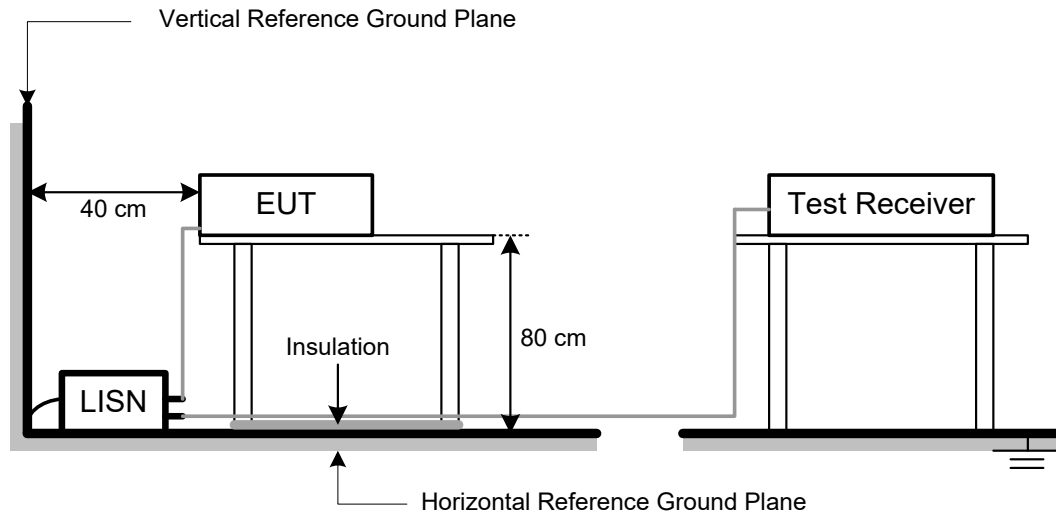


3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 2	Test Model	BT-HH6105 B

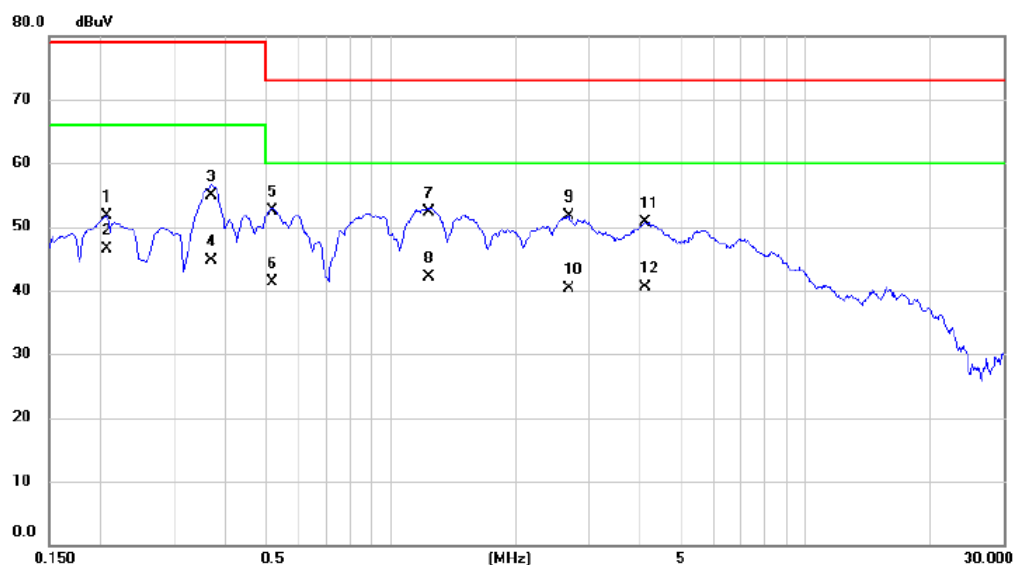


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2063	41.75	10.00	51.75	79.00	-27.25	QP	
2		0.2063	36.50	10.00	46.50	66.00	-19.50	AVG	
3		0.3704	44.80	10.03	54.83	79.00	-24.17	QP	
4		0.3704	34.60	10.03	44.63	66.00	-21.37	AVG	
5		0.5190	42.40	10.05	52.45	73.00	-20.55	QP	
6		0.5190	31.20	10.05	41.25	60.00	-18.75	AVG	
7		1.2368	42.20	10.10	52.30	73.00	-20.70	QP	
8	*	1.2368	32.10	10.10	42.20	60.00	-17.80	AVG	
9		2.6813	41.43	10.21	51.64	73.00	-21.36	QP	
10		2.6813	30.10	10.21	40.31	60.00	-19.69	AVG	
11		4.1123	40.40	10.31	50.71	73.00	-22.29	QP	
12		4.1123	30.20	10.31	40.51	60.00	-19.49	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 2	Test Model	BT-HH6105 B

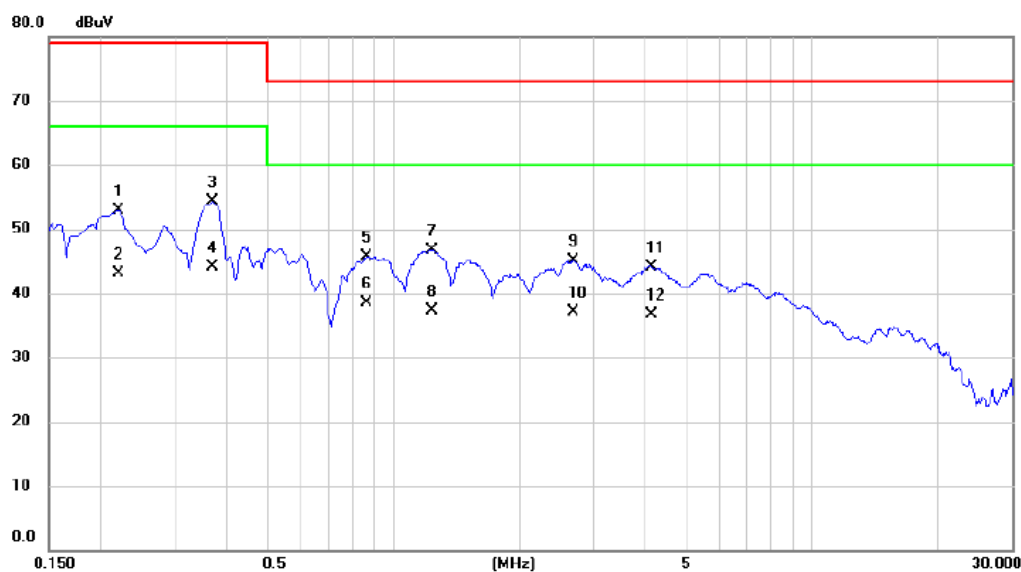


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2198	42.94	10.00	52.94	79.00	-26.06	QP	
2	0.2198	33.10	10.00	43.10	66.00	-22.90	AVG	
3	0.3704	44.21	10.03	54.24	79.00	-24.76	QP	
4	0.3704	34.10	10.03	44.13	66.00	-21.87	AVG	
5	0.8632	35.64	10.08	45.72	73.00	-27.28	QP	
6 *	0.8632	28.40	10.08	38.48	60.00	-21.52	AVG	
7	1.2390	36.67	10.10	46.77	73.00	-26.23	QP	
8	1.2390	27.20	10.10	37.30	60.00	-22.70	AVG	
9	2.6903	34.97	10.21	45.18	73.00	-27.82	QP	
10	2.6903	26.80	10.21	37.01	60.00	-22.99	AVG	
11	4.1370	33.84	10.33	44.17	73.00	-28.83	QP	
12	4.1370	26.40	10.33	36.73	60.00	-23.27	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 2	Test Model	BT-HH6105 B

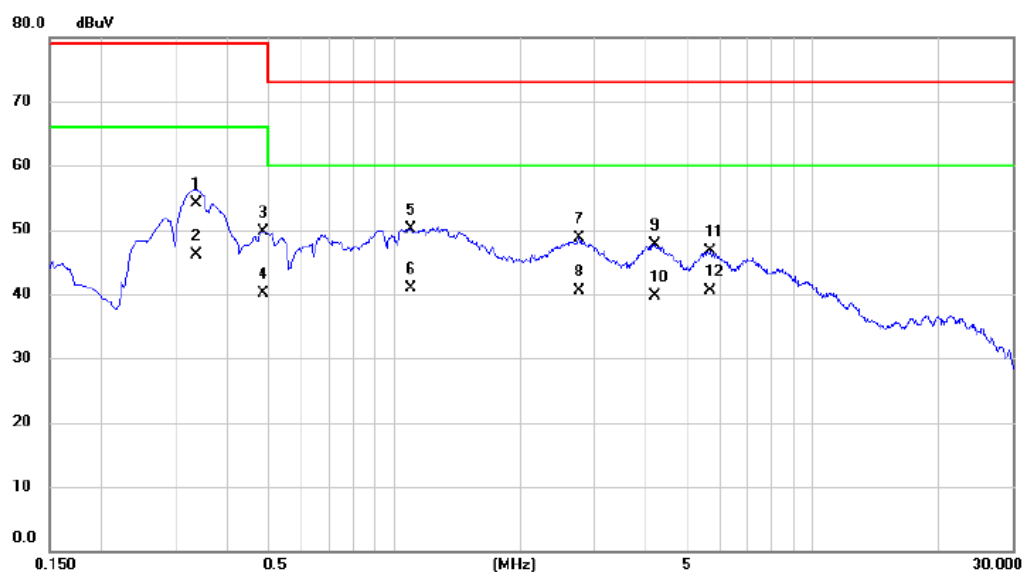

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.3367	44.10	10.02	54.12	79.00	-24.88	QP	
2	0.3367	36.00	10.02	46.02	66.00	-19.98	AVG	
3	0.4852	39.60	10.05	49.65	79.00	-29.35	QP	
4	0.4852	30.00	10.05	40.05	66.00	-25.95	AVG	
5	1.0950	40.08	10.09	50.17	73.00	-22.83	QP	
6 *	1.0950	30.80	10.09	40.89	60.00	-19.11	AVG	
7	2.7735	38.46	10.23	48.69	73.00	-24.31	QP	
8	2.7735	30.20	10.23	40.43	60.00	-19.57	AVG	
9	4.1820	37.45	10.33	47.78	73.00	-25.22	QP	
10	4.1820	29.40	10.33	39.73	60.00	-20.27	AVG	
11	5.6940	36.20	10.43	46.63	73.00	-26.37	QP	
12	5.6940	30.10	10.43	40.53	60.00	-19.47	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 2	Test Model	BT-HH6105 B

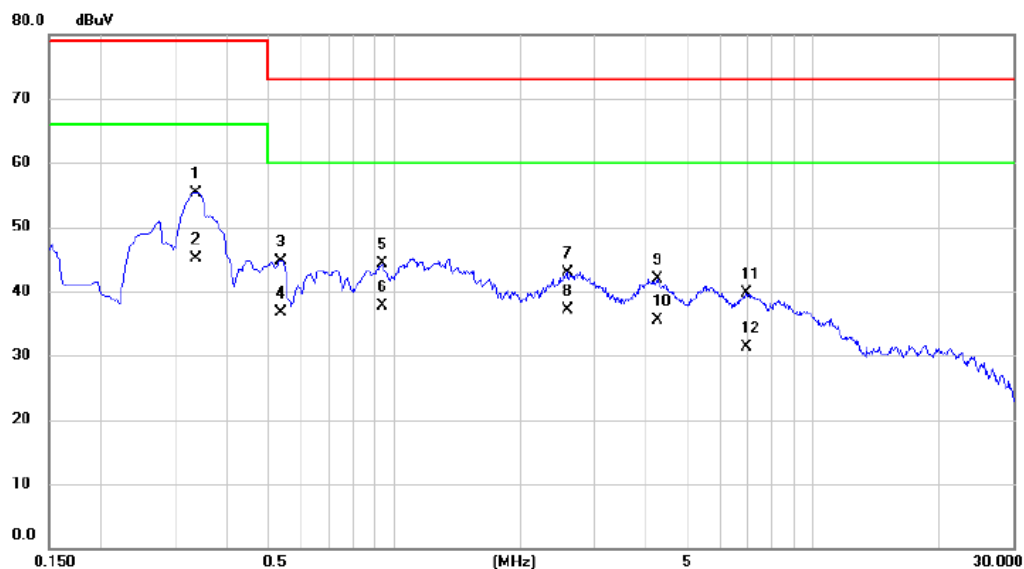

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3367	45.34	10.02	55.36	79.00	-23.64	QP	
2	*	0.3367	35.10	10.02	45.12	66.00	-20.88	AVG	
3		0.5370	34.69	10.05	44.74	73.00	-28.26	QP	
4		0.5370	26.70	10.05	36.75	60.00	-23.25	AVG	
5		0.9375	34.28	10.08	44.36	73.00	-28.64	QP	
6		0.9375	27.60	10.08	37.68	60.00	-22.32	AVG	
7		2.5890	32.79	10.21	43.00	73.00	-30.00	QP	
8		2.5890	26.80	10.21	37.01	60.00	-22.99	AVG	
9		4.2495	31.67	10.33	42.00	73.00	-31.00	QP	
10		4.2495	25.10	10.33	35.43	60.00	-24.57	AVG	
11		6.9203	29.17	10.54	39.71	73.00	-33.29	QP	
12		6.9203	20.70	10.54	31.24	60.00	-28.76	AVG	

3.4 HARMONIC CURRENT EMISSIONS TEST

3.4.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

3.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 16, 2024
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 16, 2024
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


3.4.3 TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- The classification of EUT is according to of EN IEC 61000-3-2. The EUT is classified as Class A.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

3.4.4 DEVIATION FROM TEST STANDARD

No deviation

3.4.5 TEST SETUP

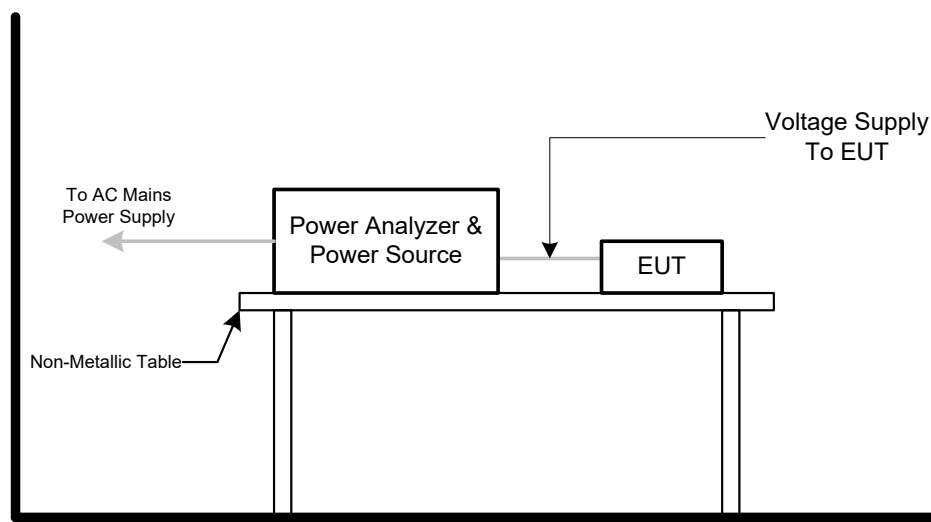


3.4.6 TEST RESULTS

Harmonics - Class-A	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2
Test Model	BT-HH6105 B

Current & voltage waveforms



Harmonics and Class A limit line European Limits

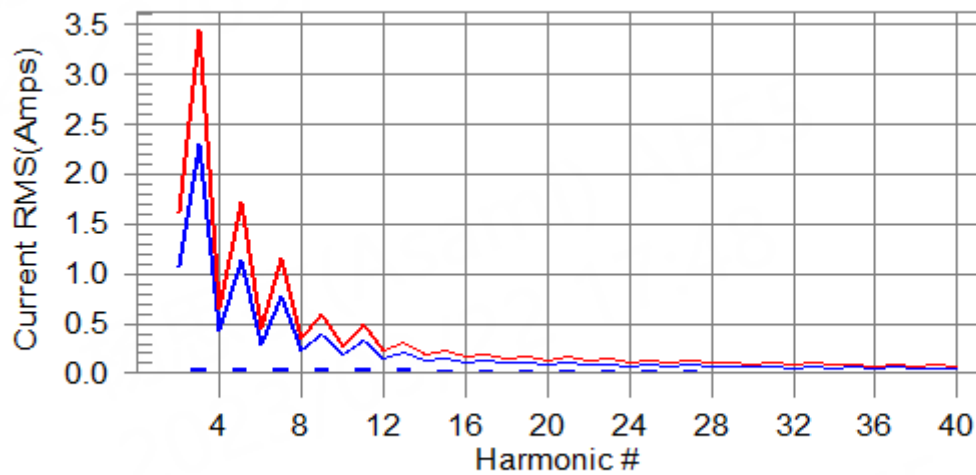

Test result: Pass Worst harmonics H19-17.9% of 150% limit, H19-26.6% of 100% limit

Current Test Result Summary (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2
Test Model	BT-HH6105 B

Highest parameter values during test:

V_RMS (Volts): 230.03
I_Peak (Amps): 0.929
I_Fund (Amps): 0.052
Power (Watts): 11.8
Frequency(Hz): 50.00
I_RMS (Amps): 0.151
Crest Factor: 6.189
Power Factor: 0.344

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.002	1.620	N/A	Pass
3	0.050	2.300	2.2	0.052	3.450	1.5	Pass
4	0.001	0.430	N/A	0.002	0.645	N/A	Pass
5	0.049	1.140	4.3	0.050	1.710	2.9	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.048	0.770	6.2	0.048	1.155	4.2	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.046	0.400	11.4	0.046	0.600	7.7	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.043	0.330	13.2	0.044	0.495	8.8	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.041	0.210	19.4	0.041	0.315	13.0	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.038	0.150	25.2	0.038	0.225	16.9	Pass
16	0.001	0.115	N/A	0.001	0.173	N/A	Pass
17	0.035	0.132	26.3	0.035	0.198	17.6	Pass
18	0.001	0.102	N/A	0.001	0.153	N/A	Pass
19	0.032	0.118	26.6	0.032	0.178	17.9	Pass
20	0.001	0.092	N/A	0.001	0.138	N/A	Pass
21	0.028	0.107	26.4	0.029	0.161	17.7	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.025	0.098	25.8	0.025	0.147	17.3	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.022	0.090	24.7	0.022	0.135	16.6	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.020	0.083	23.4	0.020	0.125	15.7	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.017	0.078	21.9	0.017	0.116	14.8	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.015	0.073	20.4	0.015	0.109	13.7	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.013	0.068	18.9	0.013	0.102	12.7	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.011	0.064	17.6	0.011	0.096	11.8	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.010	0.061	16.4	0.010	0.091	11.0	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.009	0.058	15.3	0.009	0.087	10.3	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2
Test Model	BT-HH6105 B

Highest parameter values during test:

Voltage (Vrms): 230.03	Frequency(Hz): 50.00
I_Peak (Amps): 0.929	I_RMS (Amps): 0.151
I_Fund (Amps): 0.052	Crest Factor: 6.189
Power (Watts): 11.8	Power Factor: 0.344

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.153	0.460	33.27	OK
3	0.550	2.070	26.59	OK
4	0.068	0.460	14.78	OK
5	0.054	0.920	5.87	OK
6	0.039	0.460	8.38	OK
7	0.054	0.690	7.82	OK
8	0.022	0.460	4.85	OK
9	0.036	0.460	7.86	OK
10	0.026	0.460	5.68	OK
11	0.038	0.230	16.67	OK
12	0.019	0.230	8.23	OK
13	0.023	0.230	10.12	OK
14	0.015	0.230	6.32	OK
15	0.035	0.230	15.41	OK
16	0.017	0.230	7.40	OK
17	0.026	0.230	11.16	OK
18	0.013	0.230	5.80	OK
19	0.035	0.230	15.03	OK
20	0.021	0.230	9.21	OK
21	0.023	0.230	9.86	OK
22	0.012	0.230	5.12	OK
23	0.031	0.230	13.42	OK
24	0.006	0.230	2.66	OK
25	0.023	0.230	10.13	OK
26	0.008	0.230	3.30	OK
27	0.028	0.230	12.13	OK
28	0.008	0.230	3.56	OK
29	0.026	0.230	11.13	OK
30	0.005	0.230	2.14	OK
31	0.022	0.230	9.76	OK
32	0.006	0.230	2.60	OK
33	0.020	0.230	8.78	OK
34	0.003	0.230	1.31	OK
35	0.016	0.230	7.08	OK
36	0.003	0.230	1.42	OK
37	0.019	0.230	8.47	OK
38	0.005	0.230	1.99	OK
39	0.015	0.230	6.50	OK
40	0.006	0.230	2.47	OK

3.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST

3.5.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	≤ 1.0 , Tp= 10 min.	Short Term Flicker Indicator
Plt	≤ 0.65 , Tp=2 hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Chang
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	≤ 500 ms	Relative V-change characteristic

3.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 16, 2024
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 16, 2024
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


3.5.3 TEST PROCEDURE

- Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

3.5.4 DEVIATION FROM TEST STANDARD

No deviation

3.5.5 TEST SETUP

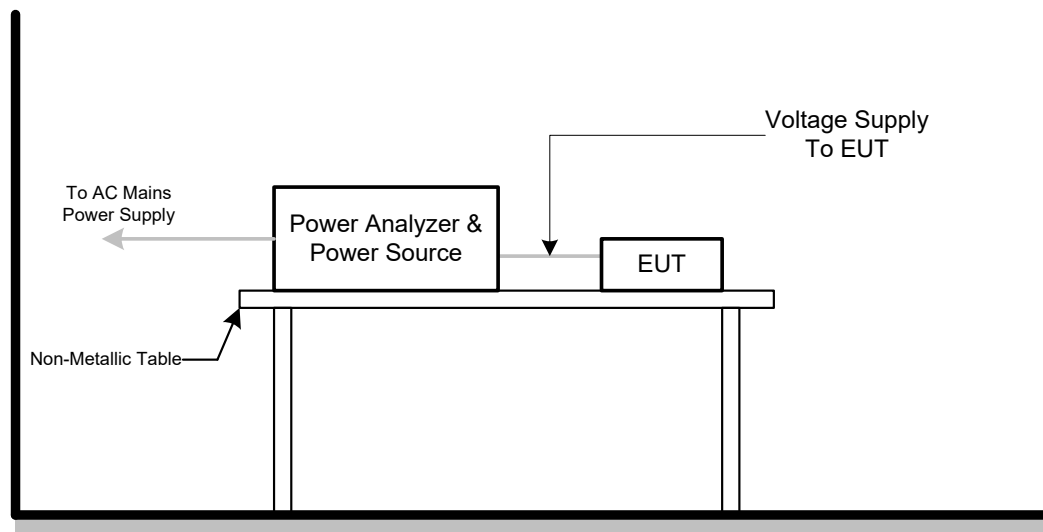


3.5.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 2
Test Model	BT-HH6105 B

Pst_i and limit line

European Limits

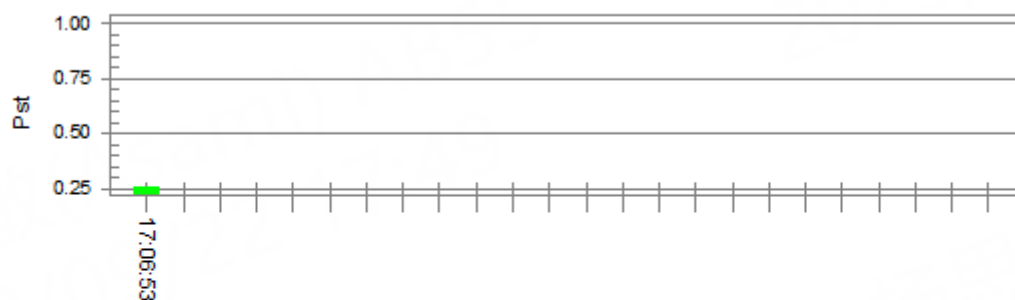

Plt and limit line

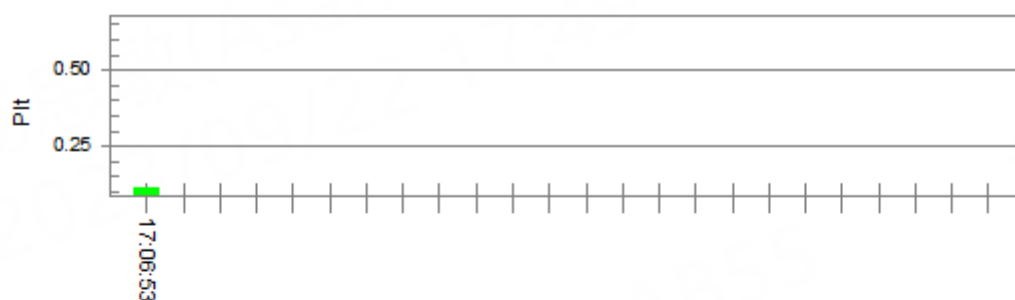

Parameter values recorded during the test:

Vrms at the end of test (Volt): 229.93

Highest dt (%):

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.261

Highest Plt (2 hr. period): 0.114

Test limit (%):

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass

4. EMC IMMUNITY TEST

4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports (NOTE 2)	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports (NOTE 2)	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	Port Type: unshielded symmetrical		
	Apply: lines to ground		
	Primary protection is Intended ±1 kV and ±4 kV 10/700(5/320)Tr/Th μs	Analogue/digital data ports (NOTE 1) & (NOTE 2)	C
	Primary protection is not Intended ±1 kV 10/700(5/320) Tr/Th μs		C
	Port type: coaxial or shielded		
	Apply: shield to ground		
±0.5 kV 1.2/50(8/20) Tr/Th μs	Analogue/digital data ports (NOTE 1) & (NOTE 2)	B	
line to reference ground for each individual line: ±0.5 kV(peak) 1.2/50(8/20) Tr/Th μs	DC network power ports (NOTE 2)	B	
±1 kV(peak) 1.2/50(8/20) Tr/Th μs (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th μs (line to earth or ground)	AC mains power ports	B	
Continuous induced RF disturbances IEC 61000-4-6 (CS)	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Analogue/digital data ports (NOTE 2)	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC network power ports (NOTE 2)	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage<5% 0.5 cycle Residual voltage<70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage<5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances,repitive (BIN-R)	0.15 MHz to 0.5 MHz 107 dBuV 0.5 MHz to 10 MHz 107 dBuV to 36 dBuV 10 MHz to 30 MHz 36 dBuV to 30 dBuV	Analogue/digital data ports (Applicable only to CPE xDSL ports)	A
	0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports (Apply period based on the AC mains frequency)	A
Broadband impulse noise disturbances,isolated (BIN-I)	0.15 MHz to 30 MHz 110 dBuV	Analogue/digital data ports (Applicable only to CPE xDSL ports)	B
	0.24 ms 10 ms 300 ms	Analogue/digital data ports (Apply all burst durations)	B

Note.

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standards, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

4.3 ANNEX B (NORMATIVE) - PRINT FUNCTION

4.3.1 PERFORMANCE CRITERIA

Performance criterion A:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA . Additionally, the following shall not occur as a consequence of the application of the disturbance:

- change of operating state;
- unintended pausing of the print operation;
- a change of print quality or legibility, as appropriate to the test pattern;
- change of character font;
- unintended line feed;
- unintended page feed;
- paper feed failure.

Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA with the following specifics and additional limitations.

Paper feed failures are allowed only if, after removal of the jammed sheets, the job is automatically recovered and there is no loss of printed information.

Any low-quality print output caused by the application of the disturbance shall not continue beyond the sheet of media being printed, or beyond the typical length of a finished page or sheet printed from continuous roll media.

False indicators are permitted during the test provided that a normal operator response to that false indicator is simple (such as pressing a button). False indicators are not acceptable if they would cause the user to discard printing supplies such as ink, toner or paper, when those supplies are actually not empty or faulty. Any false indicator shall either clear automatically or after the operator's response.

After the disturbance, the print function may print the remainder of the print job at a quality

level within the manufacturer's specifications. Alternately, the print function may halt processing of a print job as a result of the disturbance, but only if the operator is capable of reprinting the job (for example, a fax printing job where the image to be printed still resides in local memory). Automatically restarting the print job from the beginning is also acceptable. In any scenario, the pairing of front and back images during double-sided printing shall be correct.

Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

4.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

4.4.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ Contact Discharge: $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

4.4.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Nov. 13, 2023

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.4.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- b. For TABLE-TOP equipment:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

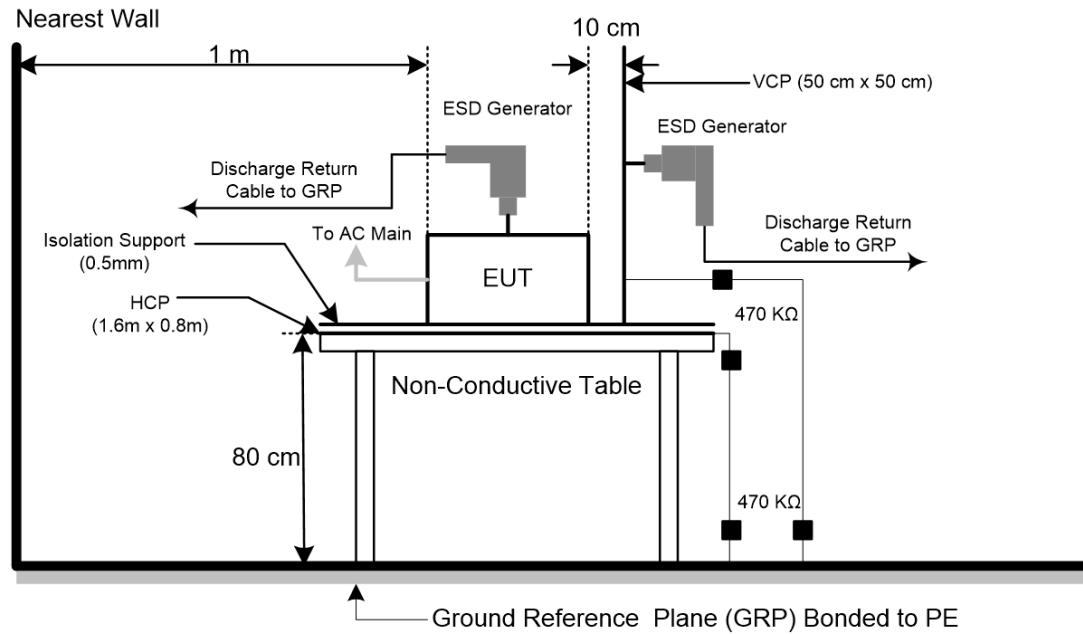

4.4.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode/Model	Mode 1-Mode 2 for BT-HH6105 B; Mode 1 for B35



Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		4kV		- kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	B	B	B	B	-	-	B	B	-	-	-	-
2	A	A	A	A	B	B	-	-	-	-	-	-	-	-
3	A	A	B	B	B	B	-	-	-	-	-	-	-	-
4	A	A	A	A	B	B	-	-	-	-	-	-	-	-
5	A	A	B	B	B	B	-	-	-	-	-	-	-	-
6	A	A	A	A	B	B	-	-	-	-	-	-	-	-
7	A	A	B	B	B	B	-	-	-	-	-	-	-	-
8	A	A	B	B	B	B	-	-	-	-	-	-	-	-
Criteria	B						-		B				-	
Result	B						-		B				-	



Mode	HCP Contact Discharge						VCP Contact Discharge					
	4kV		- kV		- kV		4kV		- kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
Left side	B	B	-	-	-	-	B	B	-	-	-	-
Right side	B	B	-	-	-	-	B	B	-	-	-	-
Front side	B	B	-	-	-	-	B	B	-	-	-	-
Rear side	B	B	-	-	-	-	B	B	-	-	-	-
Criteria	B				-		B				-	
Result	B				-		B				-	



Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

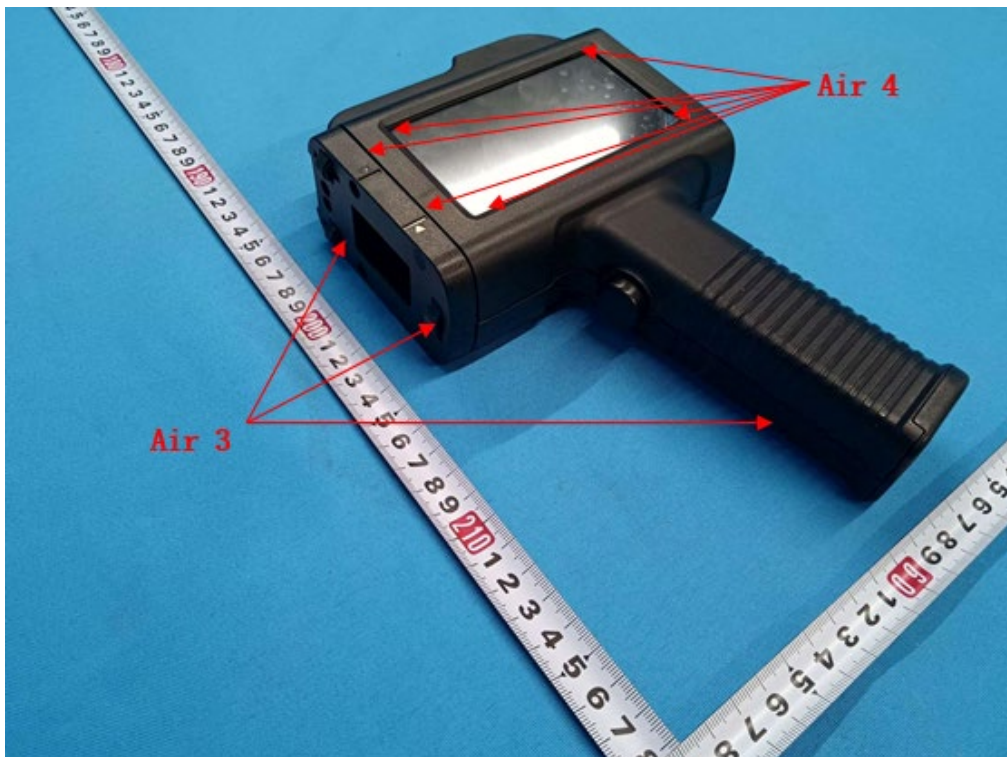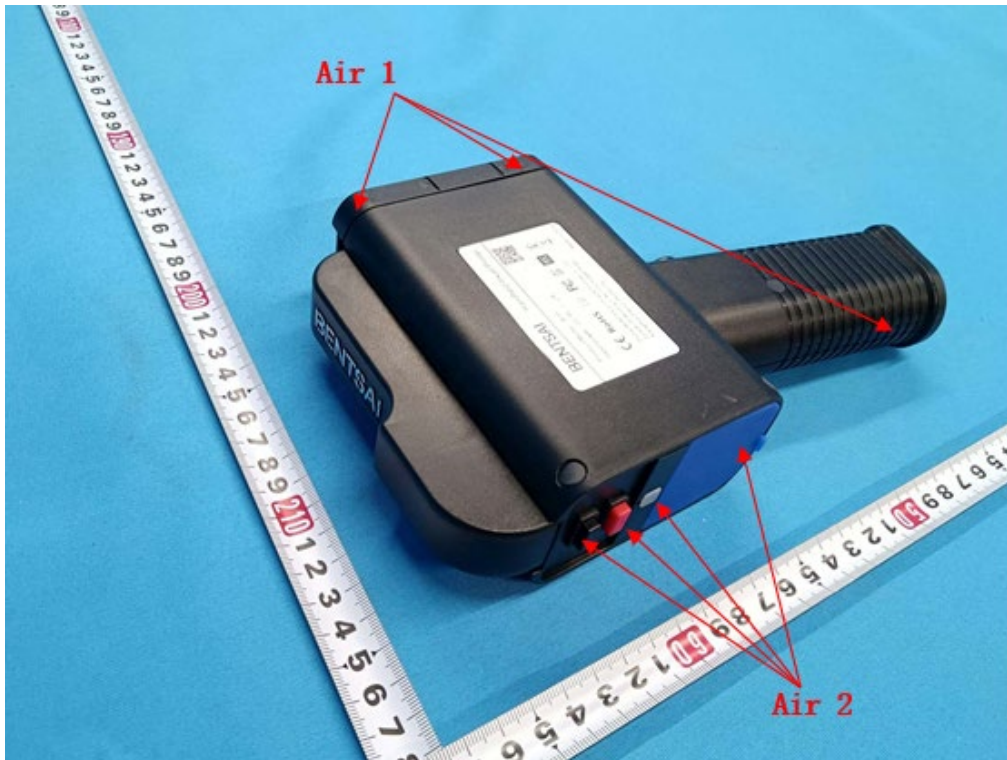

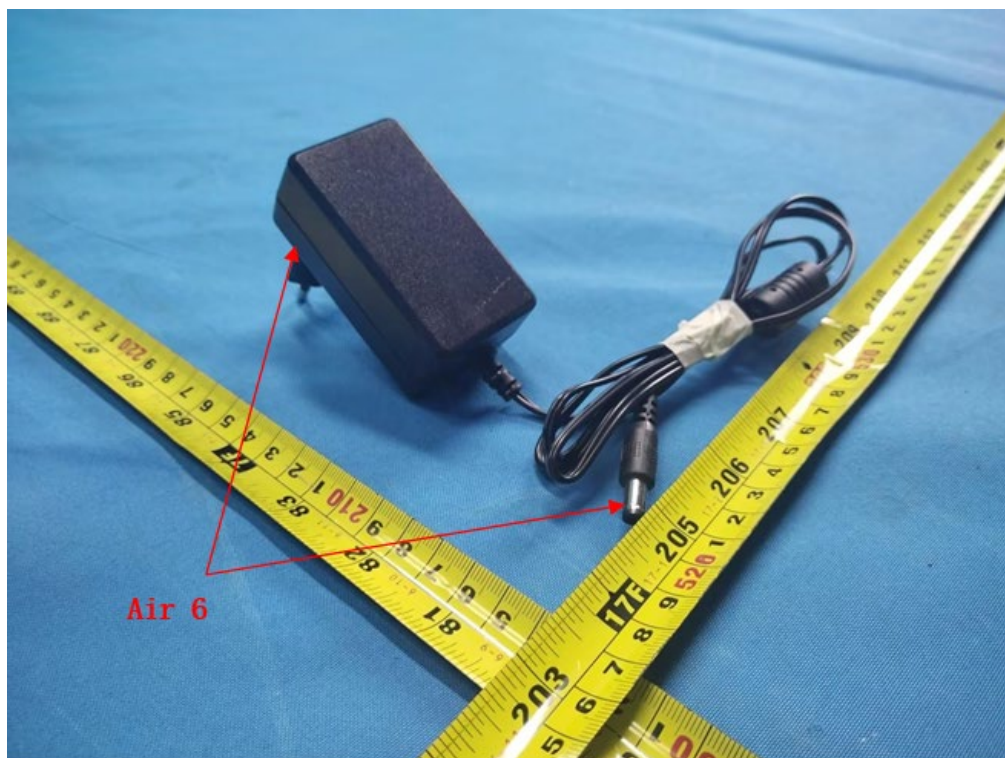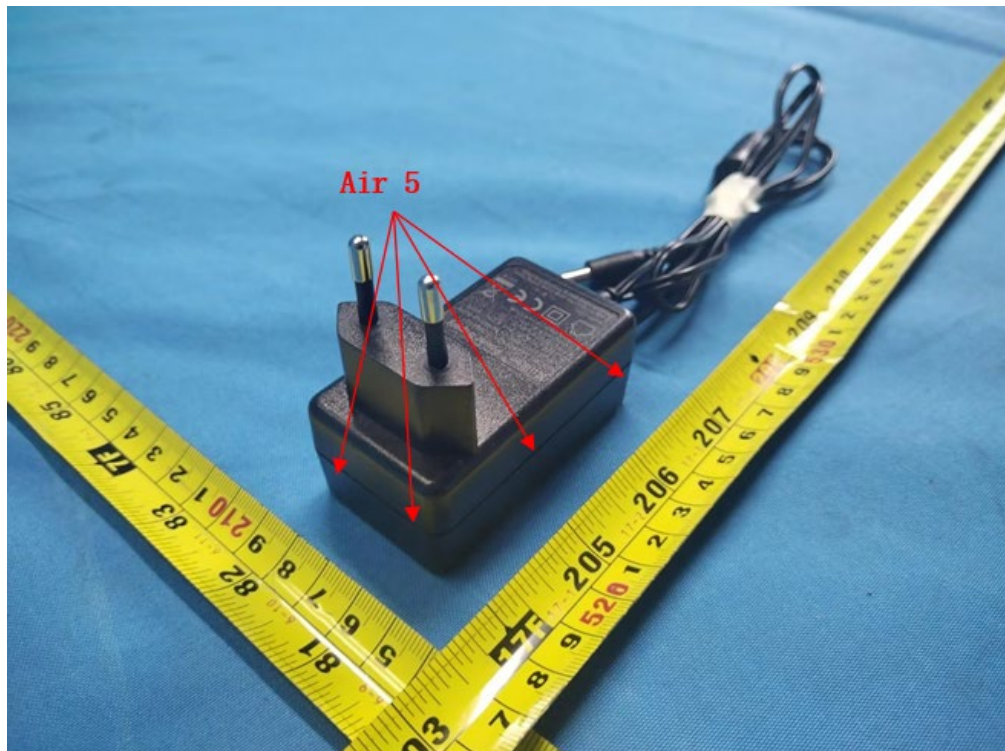

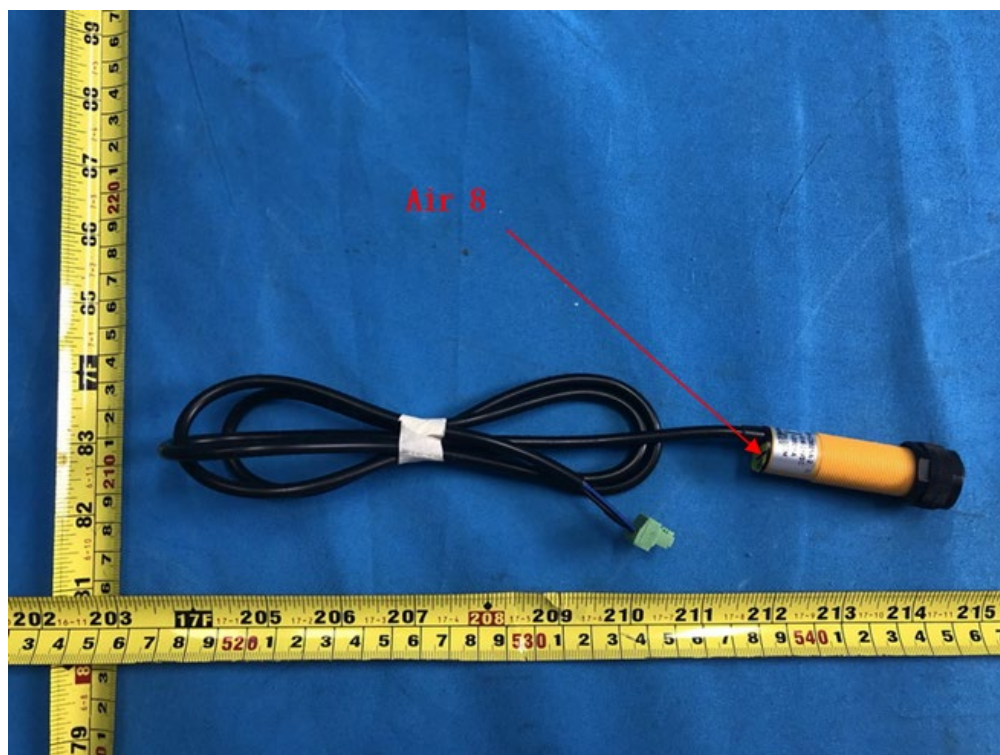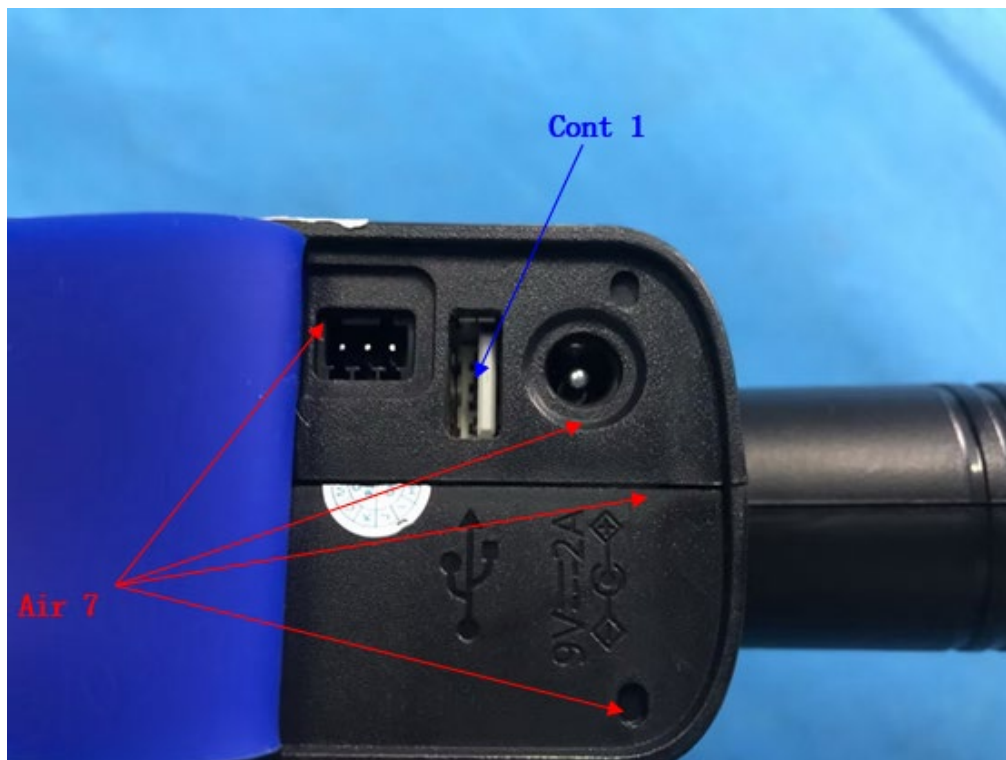

4.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

4.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz ($\pm 1\%$)
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

4.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3142B	26419	Dec. 05, 2023
2	Amplifier	AR	50S1G4A	326720	Jan. 07, 2024
3	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Jun. 17, 2024
4	Power amplifier	MILMEGA	AS1860-50	1064834	Jan. 07, 2024
5	Microwave Log.-Per. Antenna	Schwarzbeck	STLP 9149	9149-277	Apr. 14, 2024
6	Power amplifier	MILMEGA	80RF1000-250	1064833	Jan. 07, 2024
7	Measurement Software	Farad	(EZ-RS)V2.0.1.3	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.5.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.


- The field strength level was 3 V/m(unmodulated, r.m.s).
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

a) For Continuous induced RF disturbances

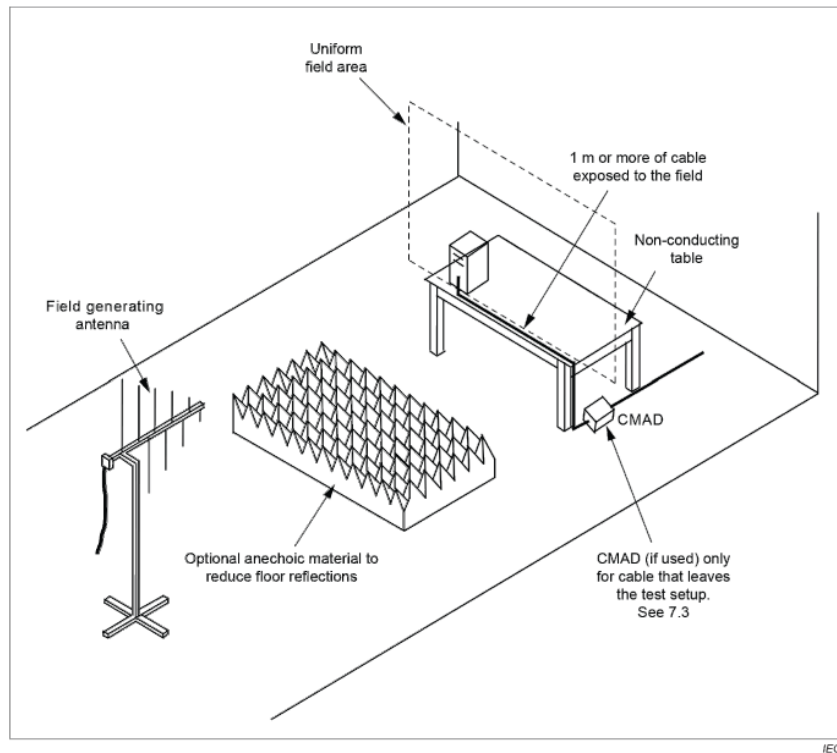

4.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode/Model	Mode 1-Mode 2 for BT-HH6105 B; Mode 1 for B35

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		

4.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

4.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC mains power ports: ± 1 kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

4.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	Jun. 16, 2024
2	Measurement Software	Prima	EFT_Series V1.0 .0.0.20180710	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.6.3 TEST PROCEDURE

For TABLE-TOP equipment:


The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m \pm 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

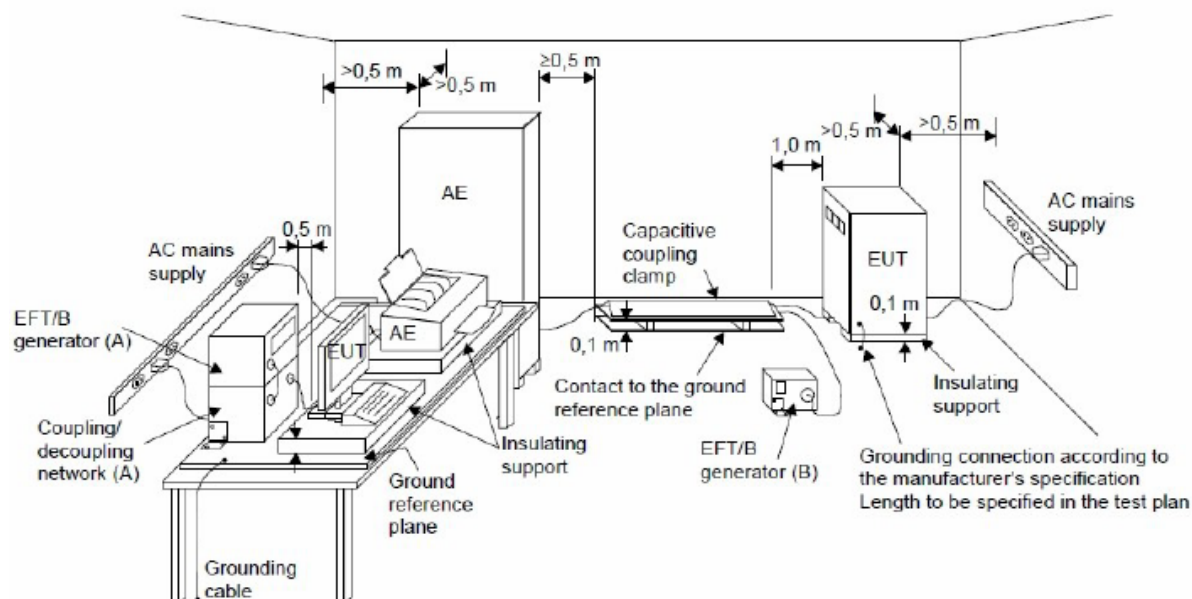

4.6.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode/Model	Mode 2 for BT-HH6105 B

EUT Ports Tested		Polarity	Repetition Frequency	Test Level 1kV	Criterion	Result
AC Power Port	Line (L)	+	5 kHz	B	B	B
		-	5 kHz	B		
	Neutral (N)	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+N	+	5 kHz	B	B	B
		-	5 kHz	B		

4.7 SURGE IMMUNITY TEST (SURGE)

4.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B(AC mains power ports)
Wave-Shape	1.2/50(8/20) Tr/Th μ s combination wave
Test Voltage	AC mains power ports: ± 0.5 kV, ± 1 kV
Generator Source Impedance	2 Ω of the low-voltage power supply network.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90°phase Five negative pulses line-to-neutral at 270°phase
Pulse Repetition Rate	1 time / min

4.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	Jun. 16, 2024
2	Measurement Software	Prima	SUG_Series V1.0.0.7.20190827	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.7.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

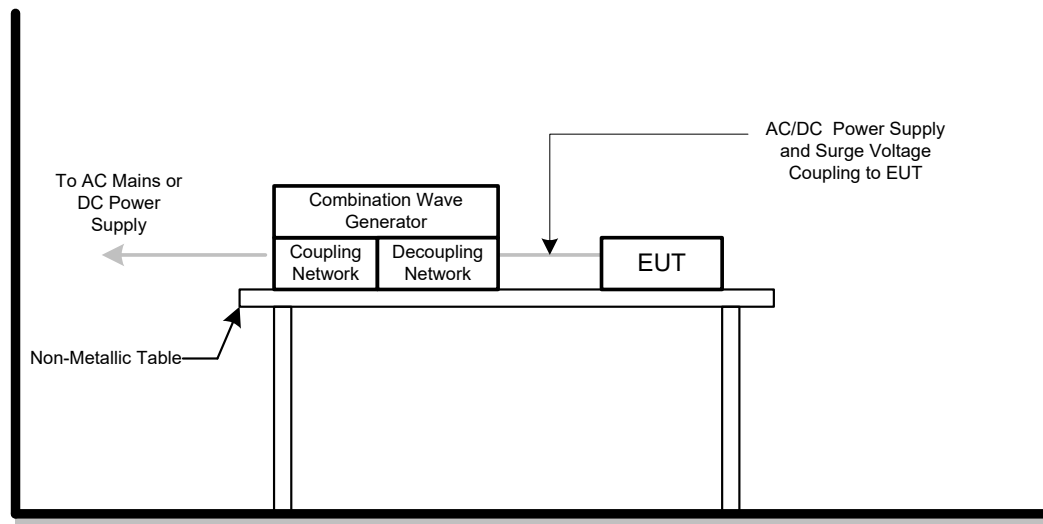

4.7.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode/Model	Mode 2 for BT-HH6105 B

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thµs						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	-- kV	-- kV		
AC	L – N	+	90°	A	B	-	-	B	B
		-	270°	A	B	-	-		

4.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

4.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Dwell Time	3 seconds

4.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TEST SYSTEM FOR CONDUCTED AND RADIATED IMMUNITY	TESEQ	NSG 4070B	37513	Jun. 16, 2024
2	Attenuator	Teseq	100-SA-FFN-06	163357	Jun. 16, 2024
3	Measurement Software	Farad	EZ-CS (V2.0.1.4)	N/A	N/A
4	Power CDN	FCC	FCC-801-M2/M3-16A	100270	Jan. 07, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.8.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.


The other condition as following manner:

- The field strength level was 3 V (unmodulated, r.m.s.)
- The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sinewave. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP

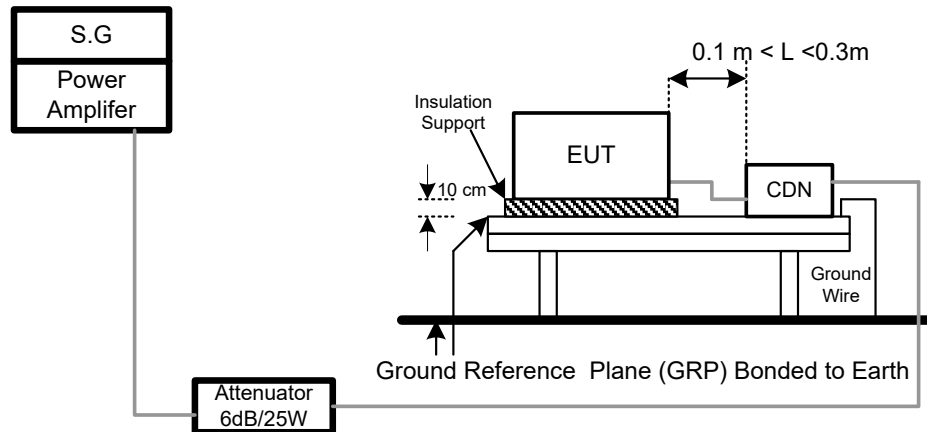

4.8.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode/Model	Mode 2 for BT-HH6105 B

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			

4.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

4.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

4.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	4032	Jan. 07, 2024
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	4024	Jan. 07, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.9.3 TEST PROCEDURE

For TABLE-TOP equipment:

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.


The other condition as following manner:

- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

4.9.4 DEVIATION FROM TEST STANDARD

No deviation

4.9.5 TEST SETUP

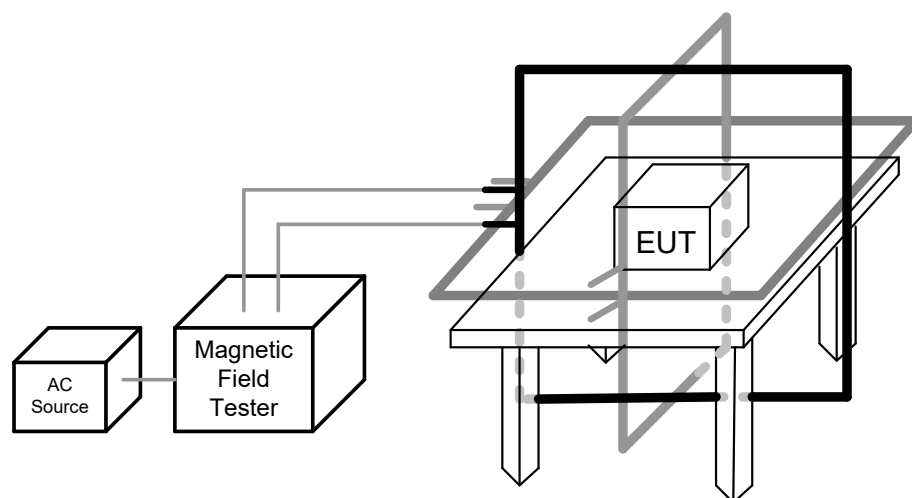

4.9.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode/Model	Mode 1-Mode 2 for BT-HH6105 B Mode 1 for B35

50Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

60Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

4.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

4.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

4.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	Jun. 16, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


4.10.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

4.10.4 DEVIATION FROM TEST STANDARD

No deviation

4.10.5 TEST SETUP

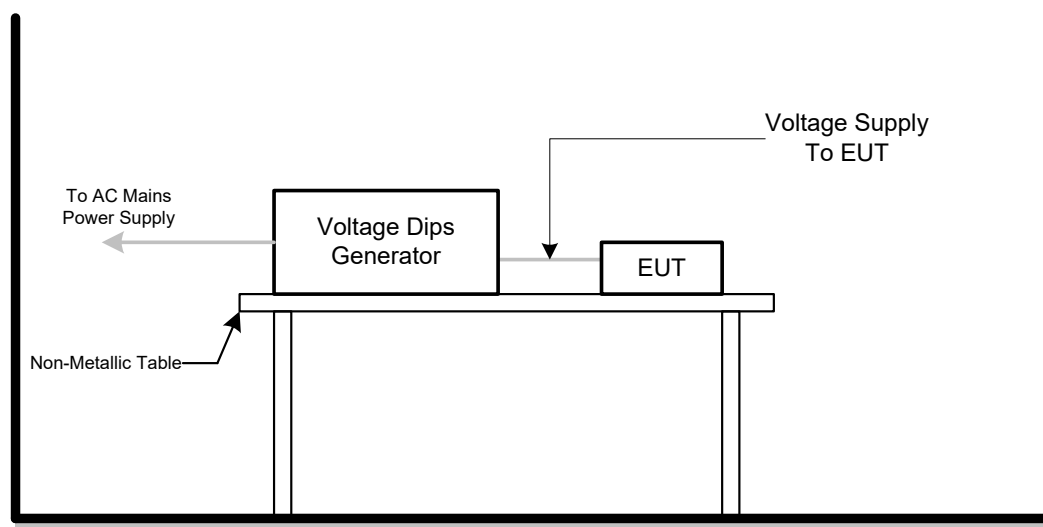

4.10.6 TEST RESULTS

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode/Model	Mode 2 for BT-HH6105 B



AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	B

AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	B



AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	B

5. EUT TEST PHOTO


Radiated emissions up to 1 GHz

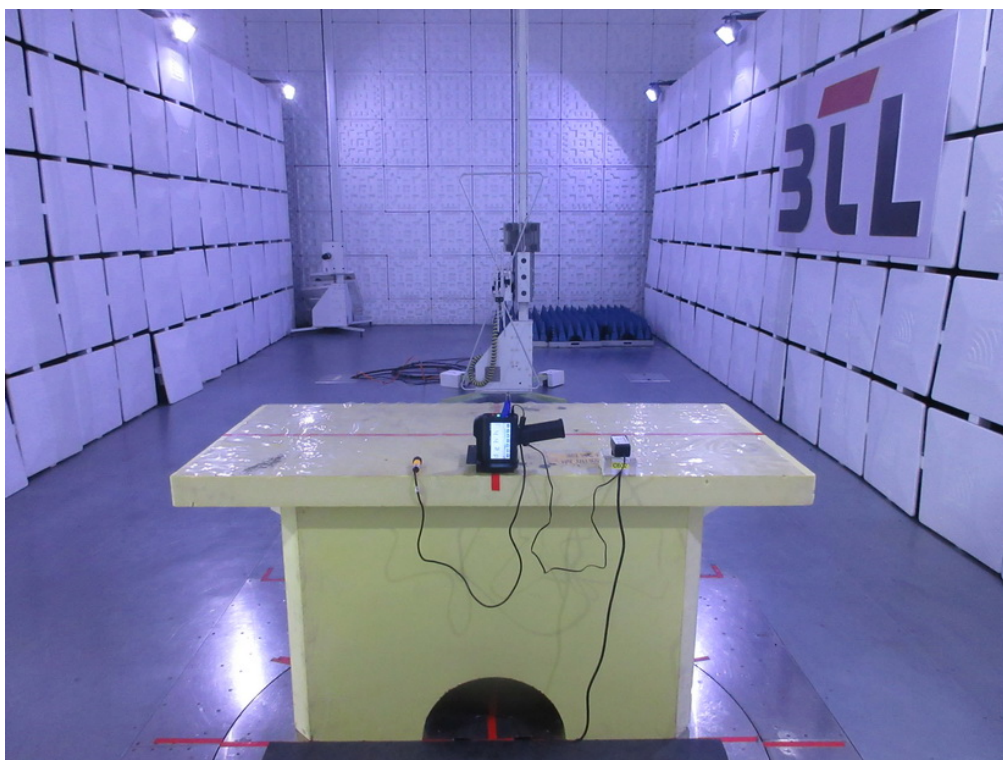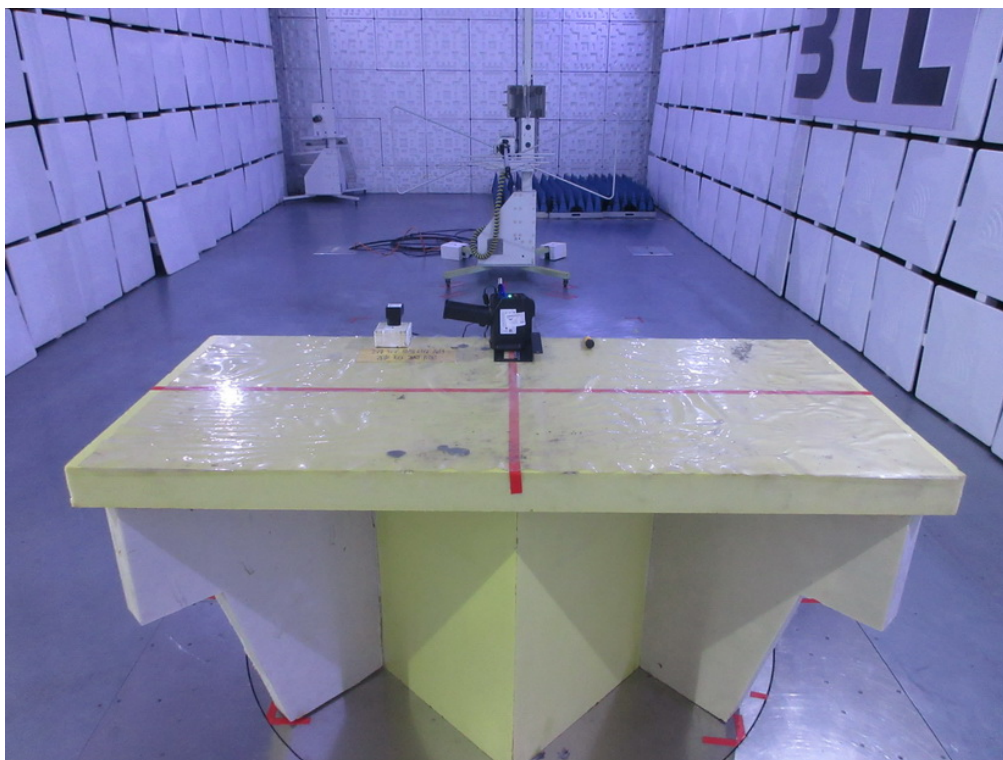


Radiated emissions above 1 GHz

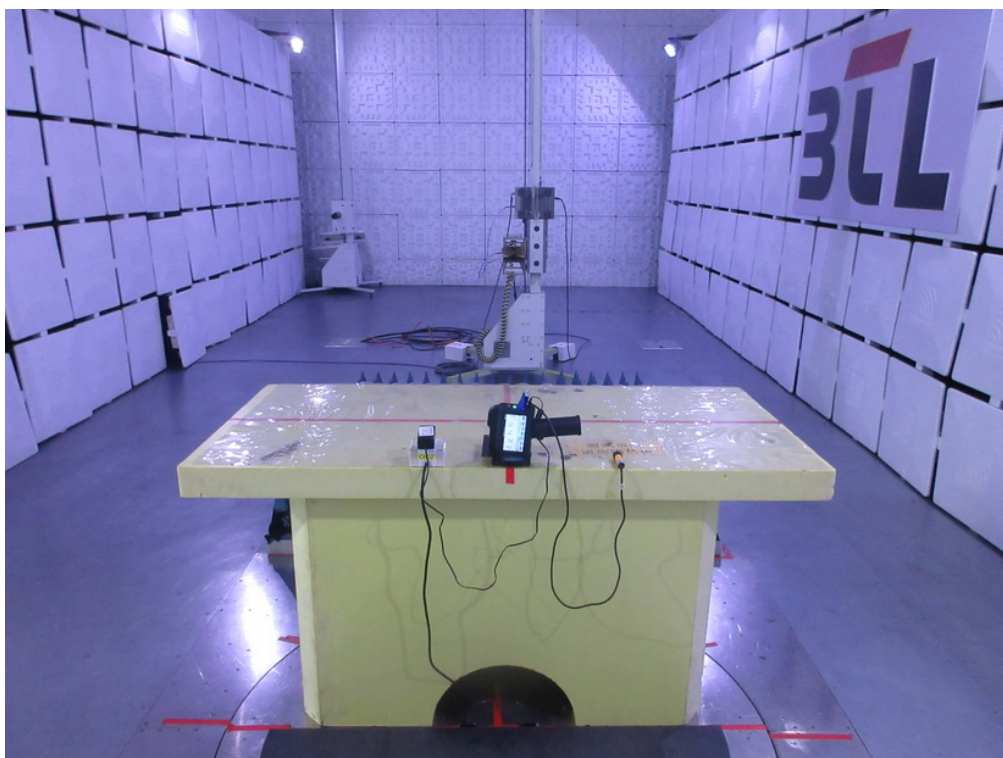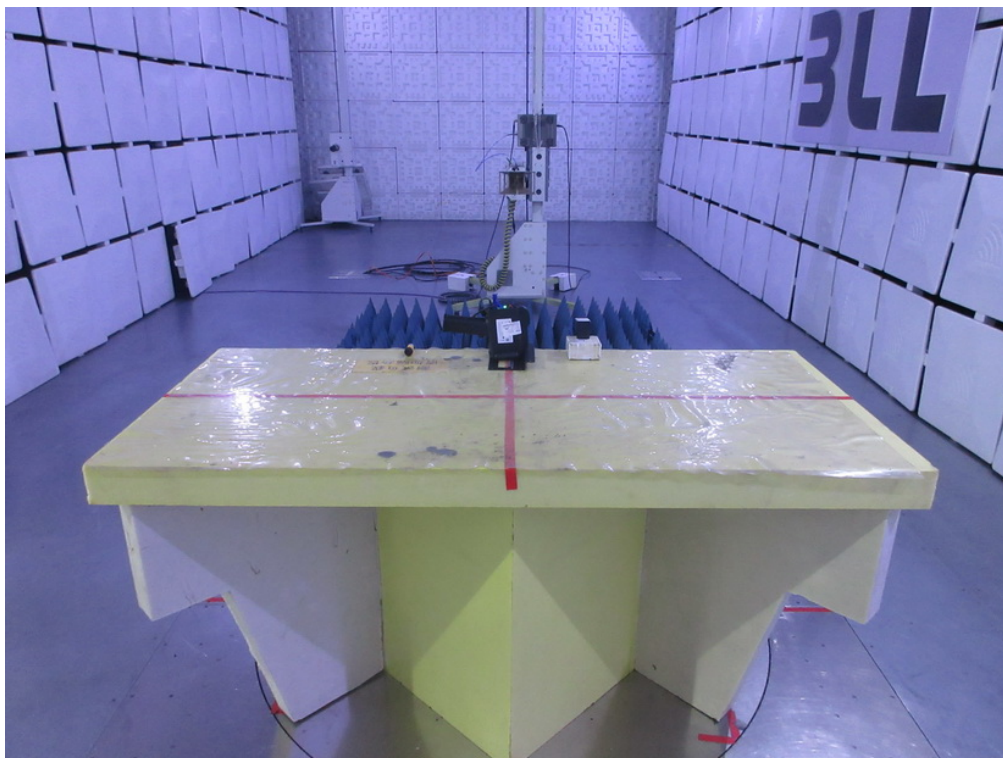

Conducted emissions AC mains power port

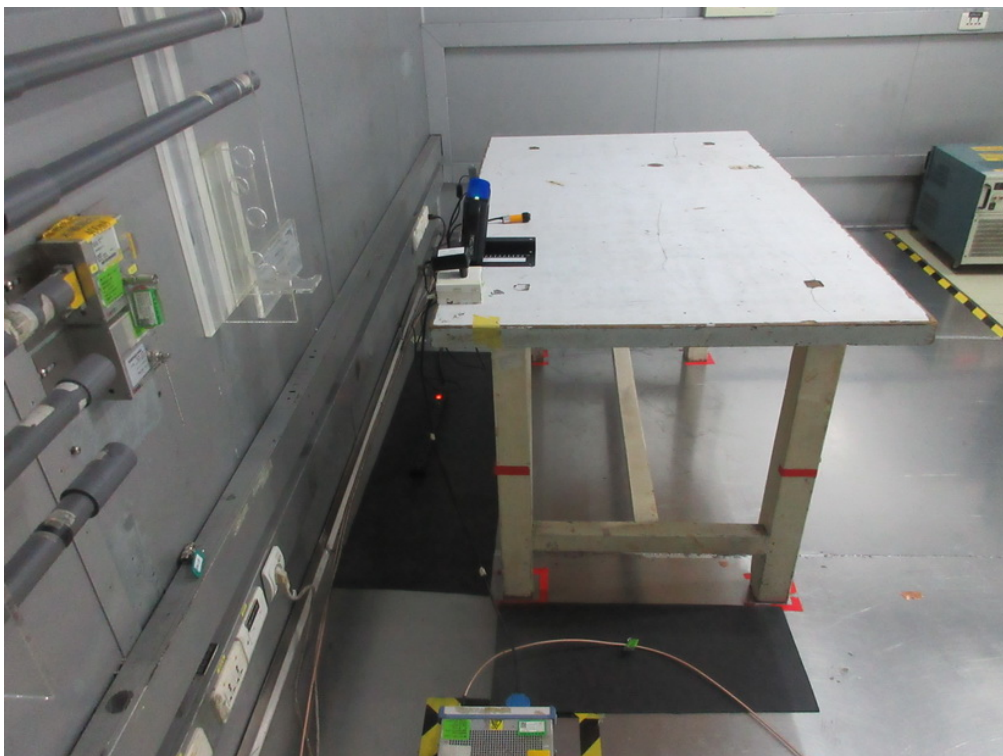


Harmonic current

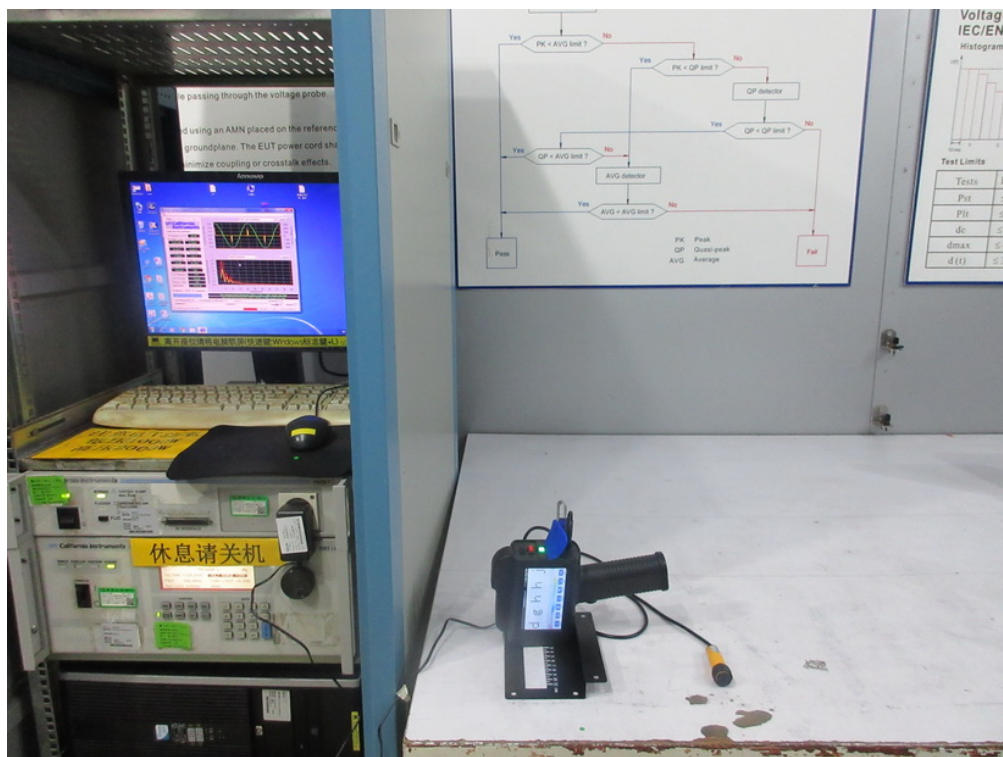

Voltage fluctuations (Flicker)




Electrostatic discharge immunity

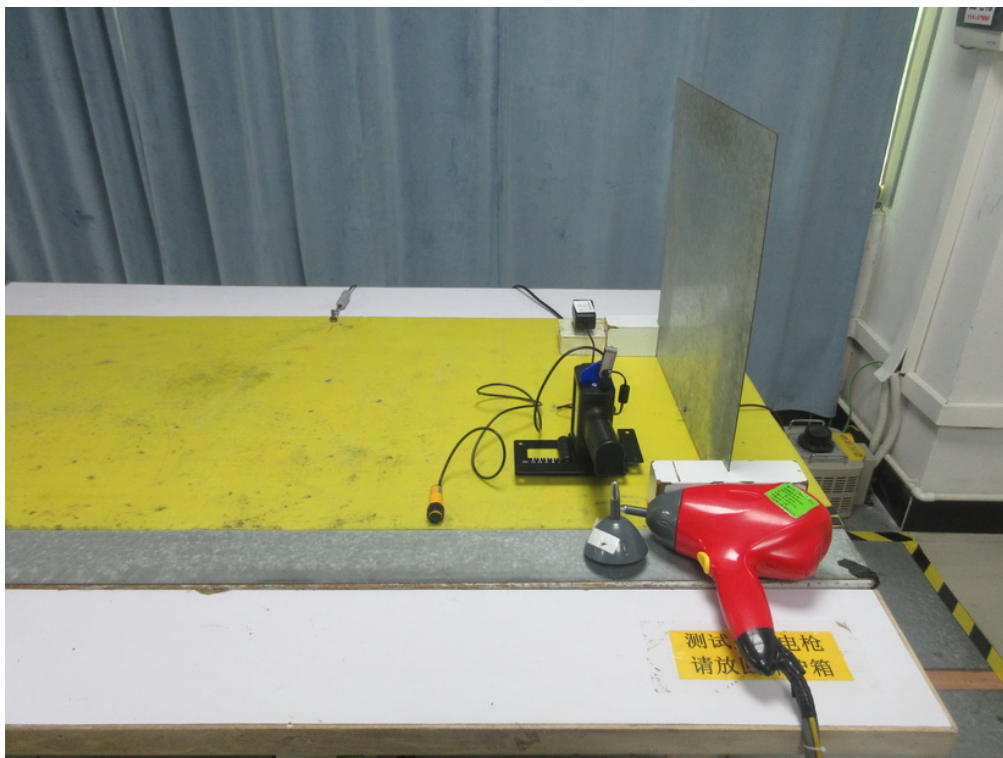


Radiated, radio-frequency, electromagnetic field immunity – Up to 1GHz




Radiated, radio-frequency, electromagnetic field immunity – Above 1GHz

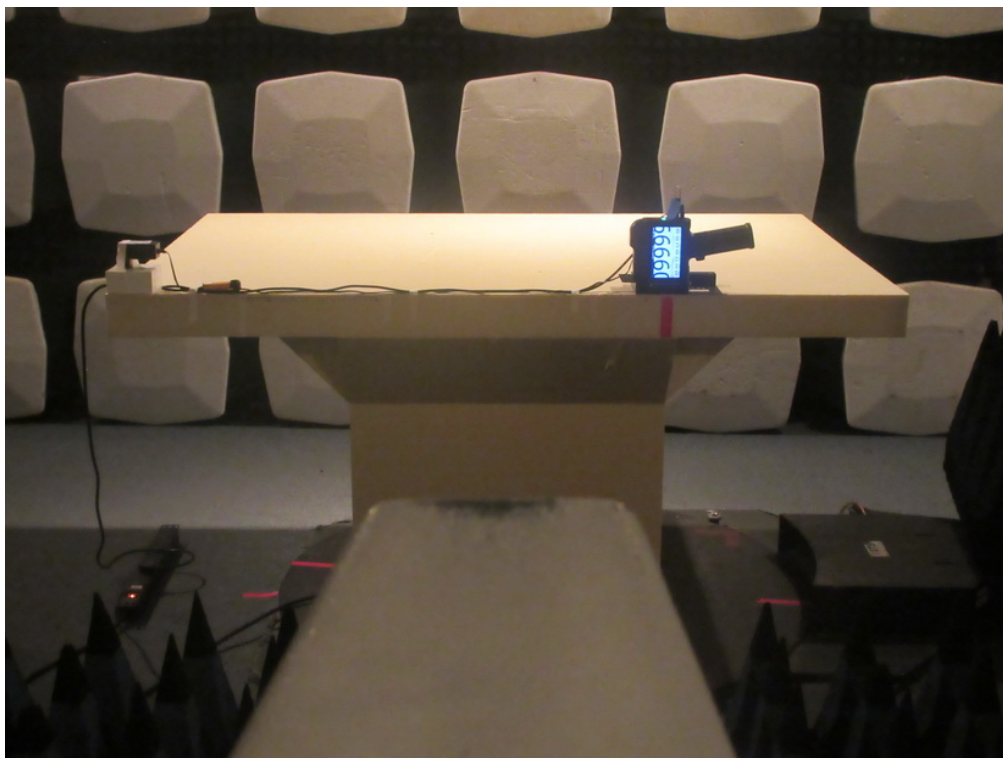


Electrical fast transient/burst immunity - AC

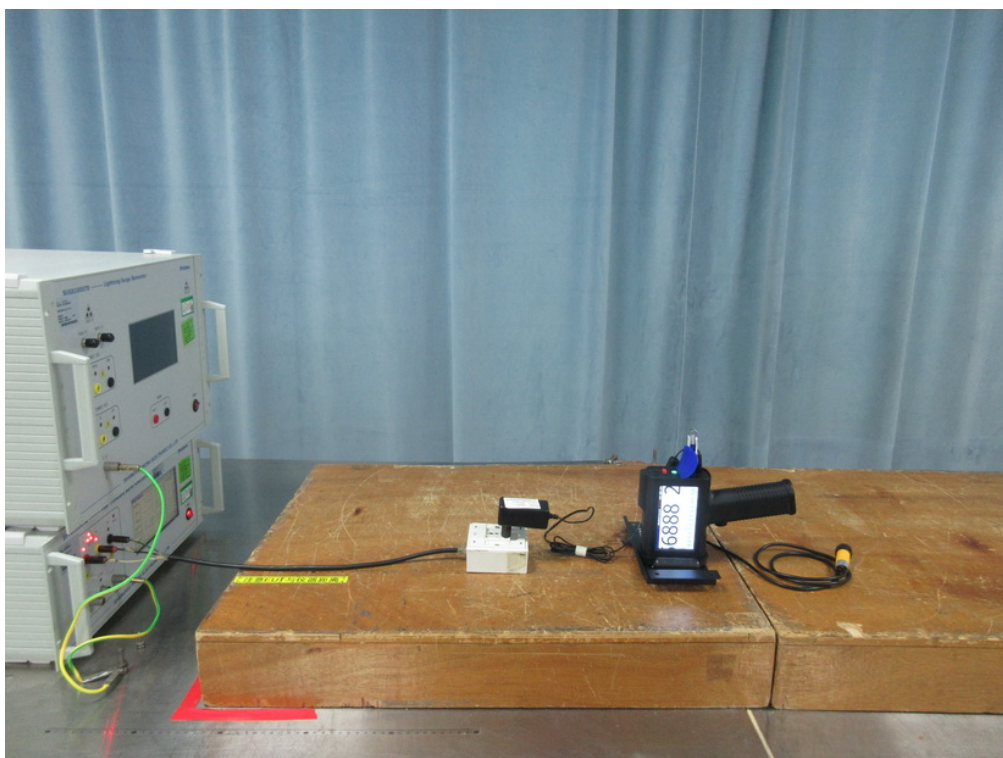


Surge immunity - AC

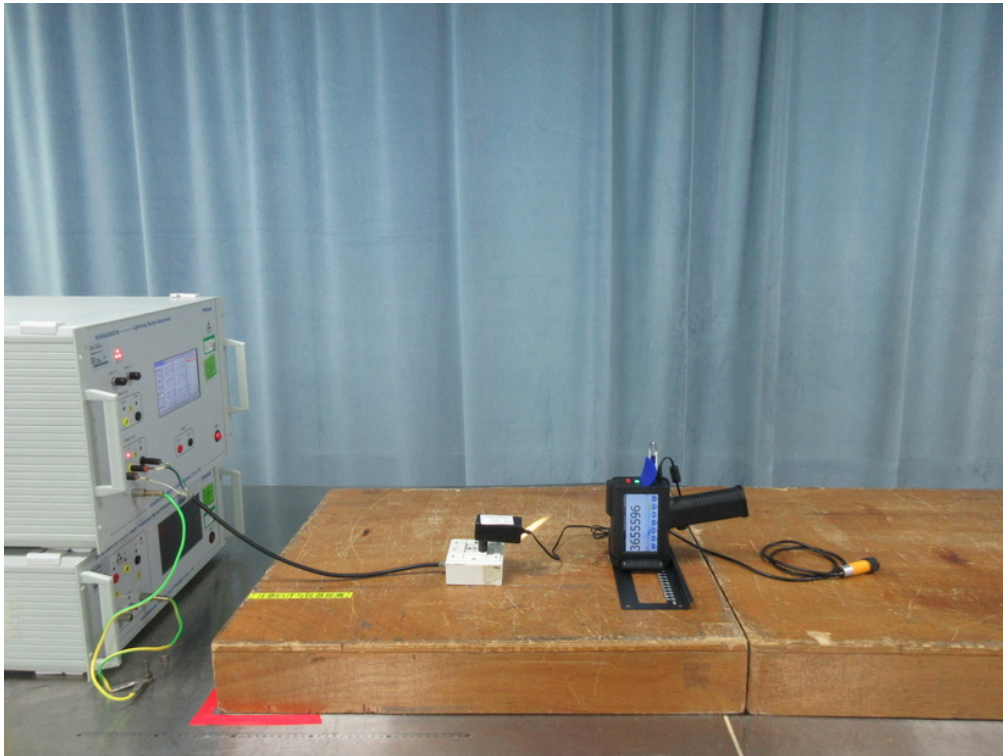


Immunity to conducted disturbances, induced by radio-frequency fields - AC

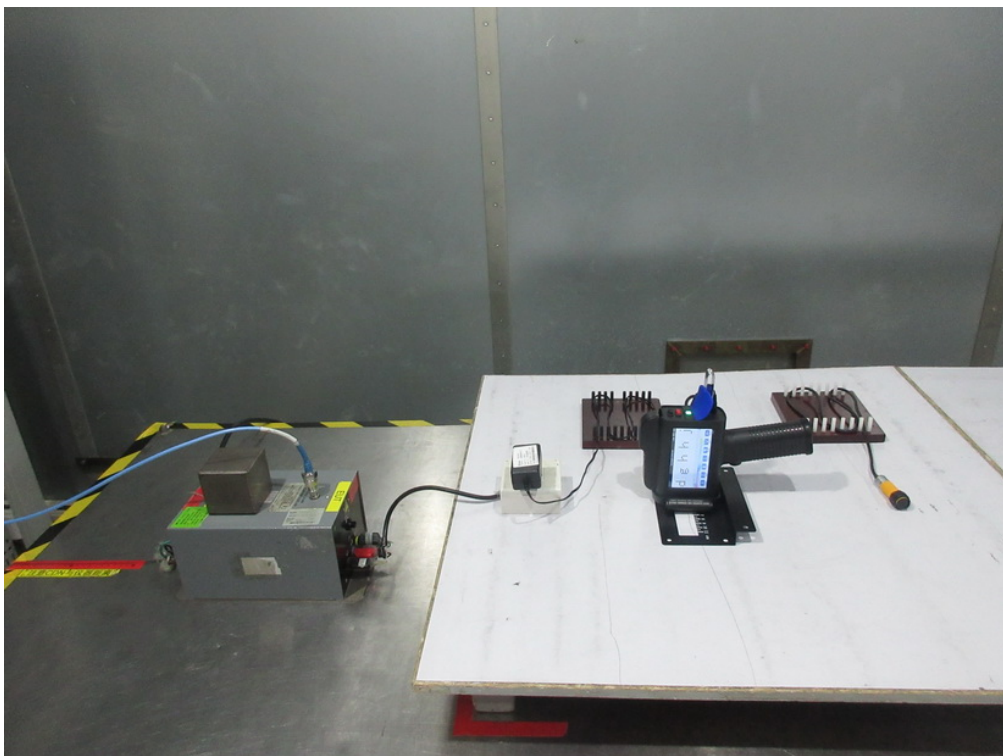

Power frequency magnetic field immunity

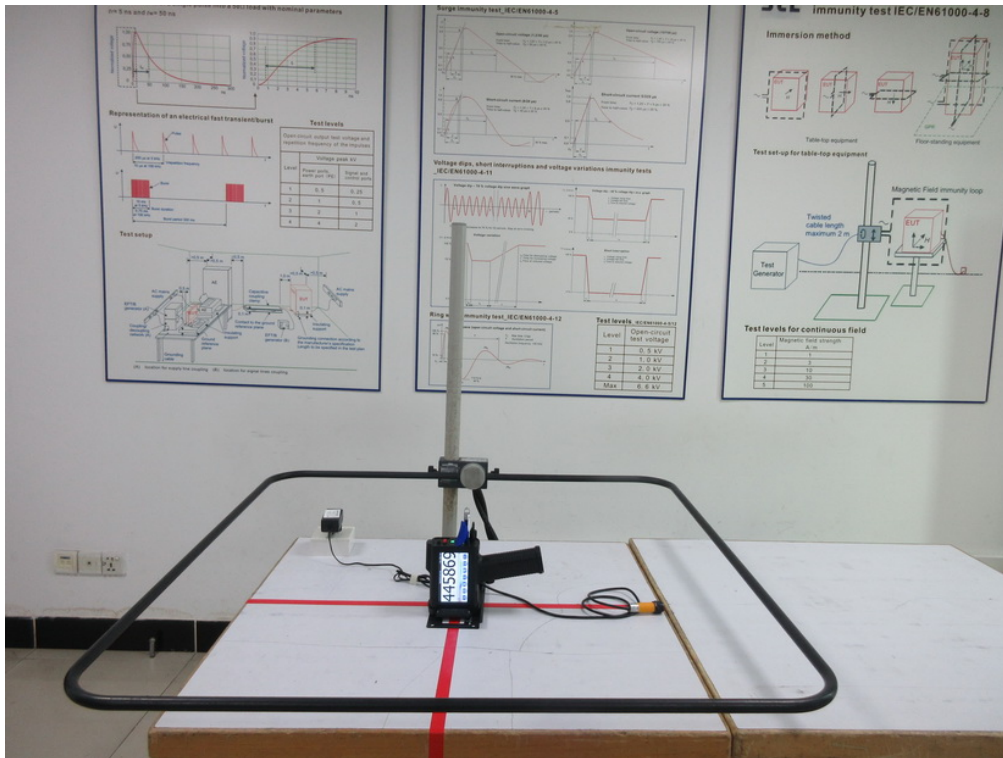

Voltage dips, short interruptions and voltage variations immunity

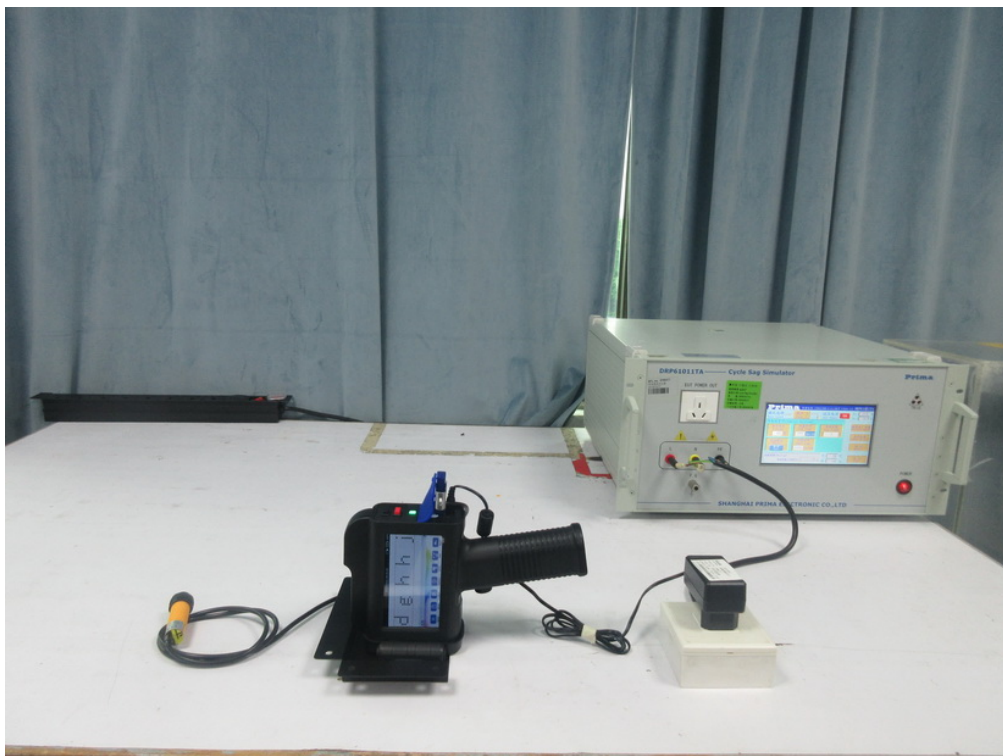

End of Test Report