



中国认可
国际互认
检测
TESTING
CNAS L3163

CE EMC Test Report

Project No. : 2404C130
Equipment : MINI PRINTER
Brand Name : 
Test Model : B10
Series Model : B11, B12, B13, B15, B16, B17, B18, B19
Applicant : Zhuhai Bentsai Electronics Co., Ltd.
Address : 2/F, Block B, Factory Building 1, 115 Huawei Road, Xiangzhou District, Zhuhai
Manufacturer : Zhuhai Bentsai Electronics Co., Ltd.
Address : 2/F, Block B, Factory Building 1, 115 Huawei Road, Xiangzhou District, Zhuhai
Factory : Zhuhai Bentsai Electronics Co., Ltd.
Address : 2/F, Block B, Factory Building 1, 115 Huawei Road, Xiangzhou District, Zhuhai
Date of Receipt : Apr. 16, 2024
Date of Test : Apr. 17, 2024 ~ May 10, 2024
Issued Date : May 15, 2024
Report Version : R00
Test Sample : Engineering Sample No.: DG20240416127
Standard(s) : EN 55032:2015+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A2:2021
EN 55035:2017+A11:2020

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.(Dongguan).

Prepared by

:

Scott Xiang

Scott Xiang

Approved by

:

Kang Zhang

Kang Zhang

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by CNAS.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	10
2 . GENERAL INFORMATION	11
2.1 GENERAL DESCRIPTION OF EUT	11
2.2 DESCRIPTION OF TEST MODES	12
2.3 EUT OPERATING CONDITIONS	13
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.5 DESCRIPTION OF SUPPORT UNITS	13
3 . EMC EMISSION TEST	14
3.1 RADIATED EMISSIONS UP TO 1 GHZ	14
3.1.1 LIMITS	14
3.1.2 MEASUREMENT INSTRUMENTS LIST	14
3.1.3 TEST PROCEDURE	15
3.1.4 DEVIATION FROM TEST STANDARD	15
3.1.5 TEST SETUP	15
3.1.6 MEASUREMENT DISTANCE	16
3.1.7 TEST RESULTS	17
3.2 RADIATED EMISSIONS ABOVE 1 GHZ	19
3.2.1 LIMITS	19
3.2.2 MEASUREMENT INSTRUMENTS LIST	19
3.2.3 TEST PROCEDURE	20
3.2.4 DEVIATION FROM TEST STANDARD	20
3.2.5 TEST SETUP	20
3.2.6 MEASUREMENT DISTANCE	21
3.2.7 TEST RESULTS	22
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	24
3.3.1 LIMITS	24
3.3.2 MEASUREMENT INSTRUMENTS LIST	24
3.3.3 TEST PROCEDURE	25
3.3.4 DEVIATION FROM TEST STANDARD	25
3.3.5 TEST SETUP	25
3.3.6 TEST RESULTS	26
3.4 HARMONIC CURRENT EMISSIONS TEST	28
3.4.1 LIMITS	28
3.4.2 MEASUREMENT INSTRUMENTS LIST	28

Table of Contents	Page
3.4.3 TEST PROCEDURE	28
3.4.4 DEVIATION FROM TEST STANDARD	28
3.4.5 TEST SETUP	28
3.4.6 TEST RESULTS	29
3.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST	32
3.5.1 LIMITS	32
3.5.2 MEASUREMENT INSTRUMENTS LIST	32
3.5.3 TEST PROCEDURE	32
3.5.4 DEVIATION FROM TEST STANDARD	32
3.5.5 TEST SETUP	33
3.5.6 TEST RESULTS	34
4 . EMC IMMUNITY TEST	35
4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	35
4.2 GENERAL PERFORMANCE CRITERIA	38
4.3 ANNEX B (NORMATIVE) - PRINT FUNCTION	39
4.3.1 PERFORMANCE CRITERIA	39
4.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	40
4.4.1 TEST SPECIFICATION	40
4.4.2 MEASUREMENT INSTRUMENTS	40
4.4.3 TEST PROCEDURE	40
4.4.4 DEVIATION FROM TEST STANDARD	41
4.4.5 TEST SETUP	41
4.4.6 TEST RESULTS	42
4.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	44
4.5.1 TEST SPECIFICATION	44
4.5.2 MEASUREMENT INSTRUMENTS	44
4.5.3 TEST PROCEDURE	44
4.5.4 DEVIATION FROM TEST STANDARD	44
4.5.5 TEST SETUP	45
4.5.6 TEST RESULTS	46
4.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)	47
4.6.1 TEST SPECIFICATION	47
4.6.2 MEASUREMENT INSTRUMENTS	47
4.6.3 TEST PROCEDURE	47
4.6.4 DEVIATION FROM TEST STANDARD	47
4.6.5 TEST SETUP	48
4.6.6 TEST RESULTS	49
4.7 SURGE IMMUNITY TEST (SURGE)	50
4.7.1 TEST SPECIFICATION	50
4.7.2 MEASUREMENT INSTRUMENTS	50
4.7.3 TEST PROCEDURE	50
4.7.4 DEVIATION FROM TEST STANDARD	51
4.7.5 TEST SETUP	51

Table of Contents	Page
4.7.6 TEST RESULTS	52
4.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY	
FIELDS TEST (CS)	53
4.8.1 TEST SPECIFICATION	53
4.8.2 MEASUREMENT INSTRUMENTS	53
4.8.3 TEST PROCEDURE	53
4.8.4 DEVIATION FROM TEST STANDARD	53
4.8.5 TEST SETUP	54
4.8.6 TEST RESULTS	55
4.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)	56
4.9.1 TEST SPECIFICATION	56
4.9.2 MEASUREMENT INSTRUMENTS	56
4.9.3 TEST PROCEDURE	56
4.9.4 DEVIATION FROM TEST STANDARD	56
4.9.5 TEST SETUP	57
4.9.6 TEST RESULTS	58
4.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY	
TEST (DIPS)	59
4.10.1 TEST SPECIFICATION	59
4.10.2 MEASUREMENT INSTRUMENTS	59
4.10.3 TEST PROCEDURE	59
4.10.4 DEVIATION FROM TEST STANDARD	59
4.10.5 TEST SETUP	59
4.10.6 TEST RESULTS	60
5 . EUT TEST PHOTO	61

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-EMC-1-2404C130	R00	Original Report.	May 15, 2024	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission			
Standard(s)	Test Item		Result
EN 55032:2015+A11:2020	Radiated emissions up to 1 GHz		PASS
	Radiated emissions above 1 GHz		PASS
	Radiated emissions from FM receivers		N/A
	Conducted emissions AC mains power port		PASS
	Asymmetric mode conducted emissions	AAN	N/A
		Current Probe	N/A
		CP+CVP	N/A
	Conducted differential voltage emissions		N/A

Standard(s)	Test Item	Result
EN IEC 61000-3-2:2019+A1:2021	Harmonic current	PASS
EN 61000-3-3:2013+A2:2021	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017+A11:2020	IEC 61000-4-2:2008	ESD	PASS
	IEC 61000-4-3:2020	RS	PASS
	IEC 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+AMD1:2017	Surge	PASS
	IEC 61000-4-6:2013	CS	PASS
	IEC 61000-4-8:2009	PFMF	PASS
	IEC 61000-4-11:2020	Dips	PASS

Standard(s)	Section	Test Item	Result
EN 55035:2017+A11:2020	4.2.7	BIN-R	N/A
	4.2.7	BIN-I	N/A

NOTE:

- (1) "N/A" denotes test is not applicable to this device.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
DG-CB02 (3m)	CISPR	30MHz ~ 200MHz	V	4.34
		30MHz ~ 200MHz	H	3.38
		200MHz ~ 1,000MHz	V	4.80
		200MHz ~ 1,000MHz	H	4.16

B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	U , (dB)
DG-CB02 (3m)	CISPR	1GHz ~ 6GHz	4.38

C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	U , (dB)
DG-C01	CISPR	150kHz ~ 30MHz	2.98

D. Harmonic current / Voltage fluctuations (Flicker) measurement:

Test Site	Method	Item	U (%)
DG-C01	EN IEC 61000-3-2 EN 61000-3-3	Voltage	0.757
		Current	0.592

E. Immunity Measurement:

Test Site	Method	Item	<i>U</i>
DG-SR02	IEC 61000-4-2	Rise time t_r	7.00%
		Peak current I_p	6.50%
		Current at 30 ns	6.60%
		Current at 60 ns	6.80%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.2dB
DG-SR05	IEC 61000-4-4	Peak voltage (VP)	3.8%
		Rise time (t_r)	4.4%
		Pulse width(t_w)	4.2%
		Pulse Freq.(kHz)	0.7%
		Burst Duration(ms)	1.5%
		Burst Period(ms)	1.4%
DG-SR05	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	4.0%
		Open circuit front time (1.2/50us)	6.2%
		Open circuit time of half value (1.2/50us)	4.7%
DG-CB06	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.28dB
DG-SR05	IEC 61000-4-8	Magnetic Field Strength	1.91%
DG-SR01	IEC 61000-4-11	DIP Amplitude	3.6%
		DIP Time Event	4.0%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.


1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By	Test Date
Radiated emissions up to 1 GHz	22°C	56%	Trey Chen	May 07, 2024
Radiated emissions above 1 GHz	22°C	56%	Trey Chen	May 07, 2024
Conducted emissions AC mains power port	25°C	60%	Riki Ran	Apr. 30, 2024
Harmonic current	25°C	60%	Riki Ran	Apr. 30, 2024
Voltage fluctuations (Flicker)	25°C	60%	Riki Ran	Apr. 30, 2024

Test Item	Temperature	Humidity	Pressure	Tested By	Test Date
ESD	24°C	54%	1010hPa	Jack Zhang	Apr. 22, 2024
RS	20°C	58%	/	Hunter Xu	Apr. 23, 2024
EFT	26°C	66%	/	Ellery Liang	Apr. 28, 2024
Surge	26°C	66%	/	Ellery Liang	Apr. 28, 2024
CS	25°C	69%	/	Penn Li	Apr. 23, 2024
PFMF	26°C	66%	/	Ellery Liang	Apr. 28, 2024
Dips	24°C	64%	/	Jensen Jiang	Apr. 19, 2024

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	MINI PRINTER
Brand Name	
Test Model	B10
Series Model	B11, B12, B13, B15, B16, B17, B18, B19
Model Difference(s)	Only differ in model name and sale marketing.
HVIN	FOX_MB_V5
FVIN	2.0.0.8
Identification No. of EUT(S/N)	B152310117
Dimensions and mass	92mm*40.5mm*110.7mm
Component unit of EUT	<input type="checkbox"/> Single unit <input checked="" type="checkbox"/> Multiple unit
Sample Status	<input type="checkbox"/> Engineering sample <input checked="" type="checkbox"/> Final shipment prototype
Power Source	1# Supplied from Type-C port. 2# Supplied battery. Model: XY503040
Power Rating	1# DC 5V 2# DC 7.4V, 500mAh
Connecting I/O Port(s)	1* Type-C port
Classification of EUT	Class A
Highest Internal Frequency(Fx)	2.4GHz

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging+Printer
Mode 2	Charging+Printer(WIFI)

Radiated emissions up to 1 GHz Test	
Final Test Mode	Description
Mode 2	Charging+Printer(WIFI)

Radiated emissions Above 1 GHz Test	
Final Test Mode	Description
Mode 1	Charging+Printer

Conducted emissions AC mains power port Test	
Final Test Mode	Description
Mode 2	Charging+Printer(WIFI)

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 2	Charging+Printer(WIFI)

Immunity Test	
Final Test Mode	Description
Mode 1	Charging+Printer
Mode 2	Charging+Printer(WIFI)

Note:


1. Pretested Mode 1-Mode 2, the worst case is recorded.
2. The product supports 2.4G WIFI function.
The frequency exemption is 2400-2483.5MHz.
3. Radiated emission above 1GHz tested with 2.4G filter.

2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. EUT connected to Adapter via TYPE-C Cable.
2. EUT connected to Wireless Router via WiFi 2.4G.
3. EUT connected to Mobile Phone via WiFi 2.4G.

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

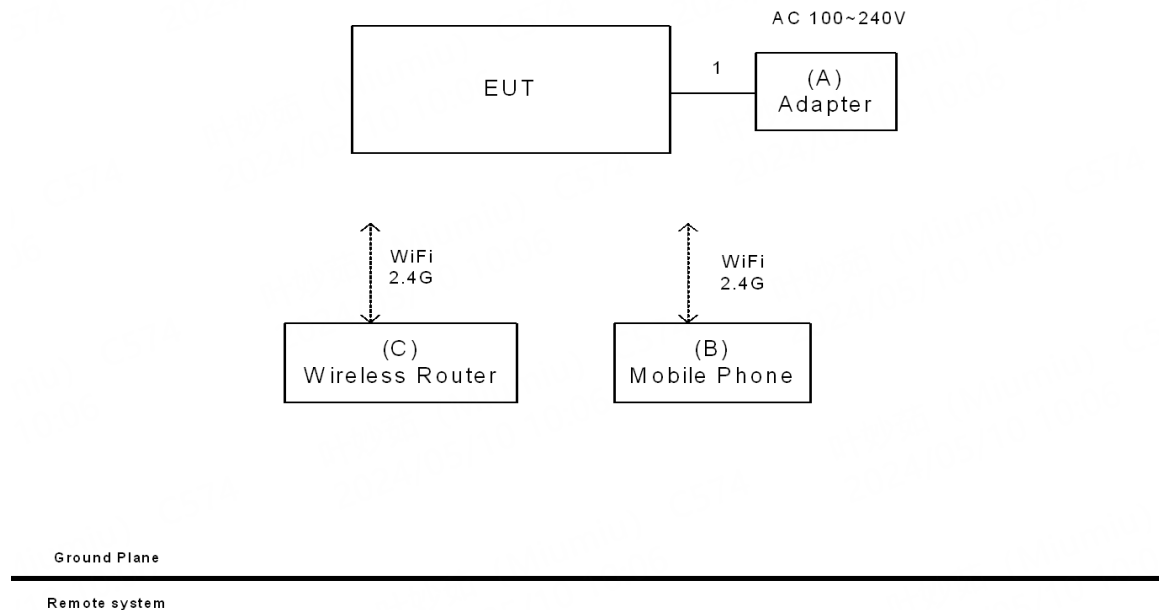

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Adapter	chicony	WI2-010N3A	N/A
B	Mobile Phone	SAMSUNG	SM-3650/DS	A3LSMG9650
C	Wireless Router	ASUS	RT-AC66U	E8ICGG000136

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	TYPE-C Cable	YES	NO	0.5m/1m

3. EMC EMISSION TEST

3.1 RADIATED EMISSIONS UP TO 1 GHZ

3.1.1 LIMITS

Class A equipment up to 1 GHz

Frequency Range MHz	Measurement			Class A limits dB(μV/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	3	Quasi peak / 120 kHz	50
230 - 1000				57

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Amplifier	EMC INSTRUMENT	EMC001330	980989	Nov. 17, 2024
2	Cable	RW	LMR-400(30MHz-1GHz)(10m+2.5m+0.8M)	N/A	May 06, 2025
3	Controller	MF	MF-7802BS	N/A	N/A
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	EMI Test Receiver	Keysight	N9038A	MY56400060	Dec. 22, 2024
6	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	946	Mar. 21, 2025
7	Attenuator	EMCI	EMCI-N-6-06	AT-N0671	Mar. 21, 2025

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.1.3 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

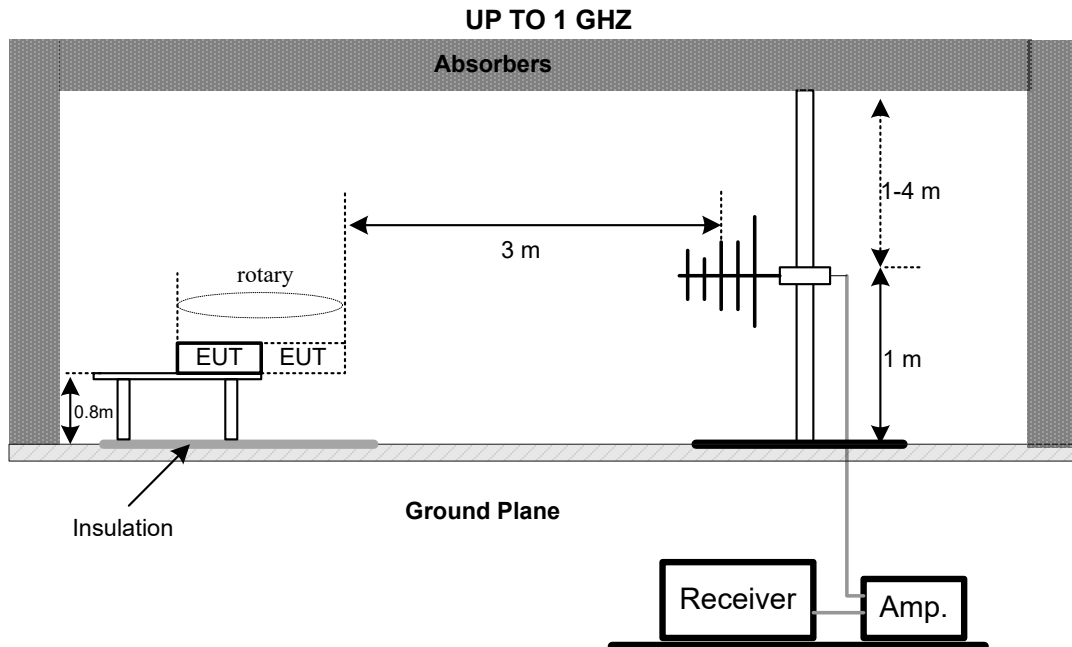

3.1.6 MEASUREMENT DISTANCE

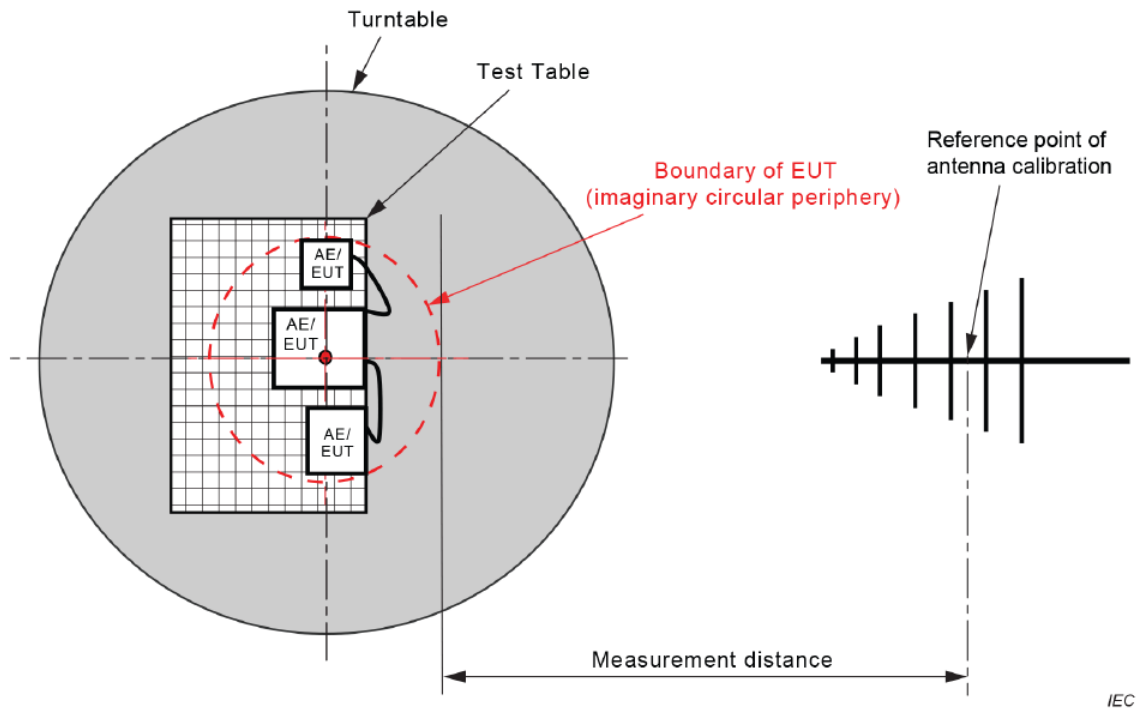


Figure C.1 – Measurement distance


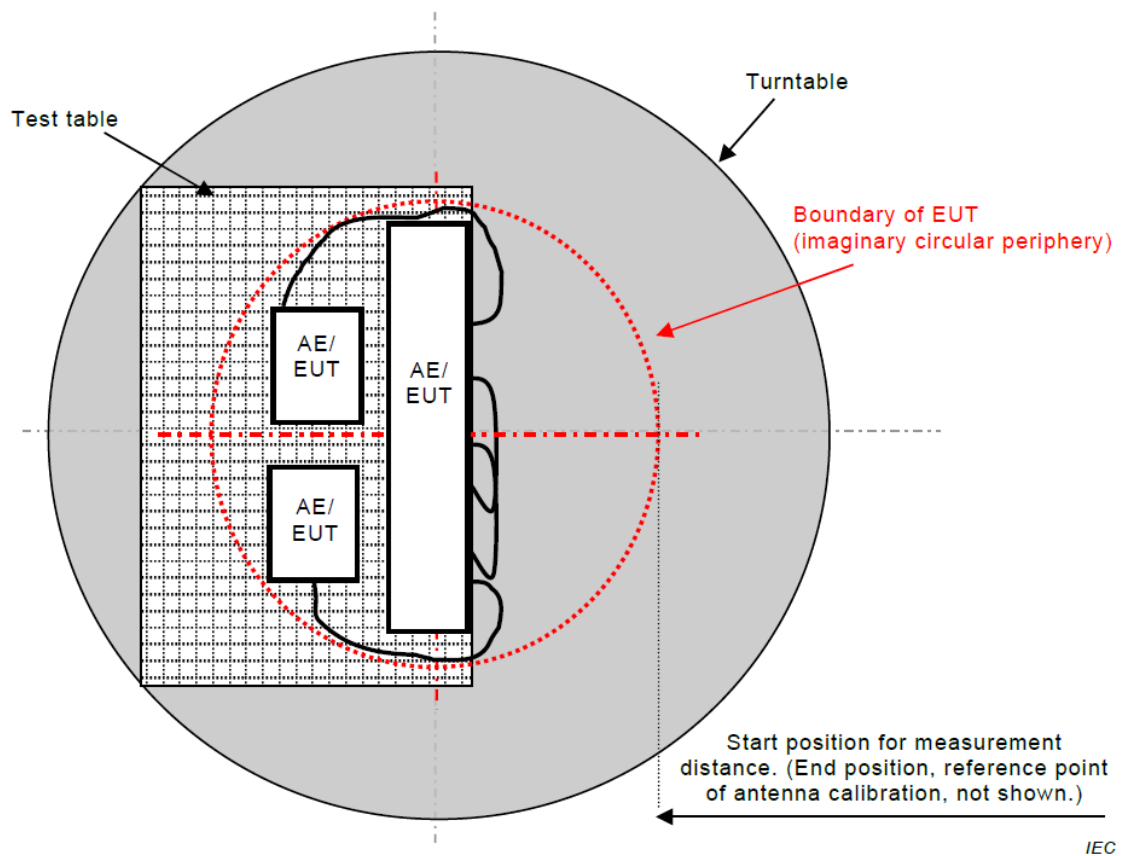


Figure C.2 – Boundary of EUT, Local AE and associated cabling


3.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

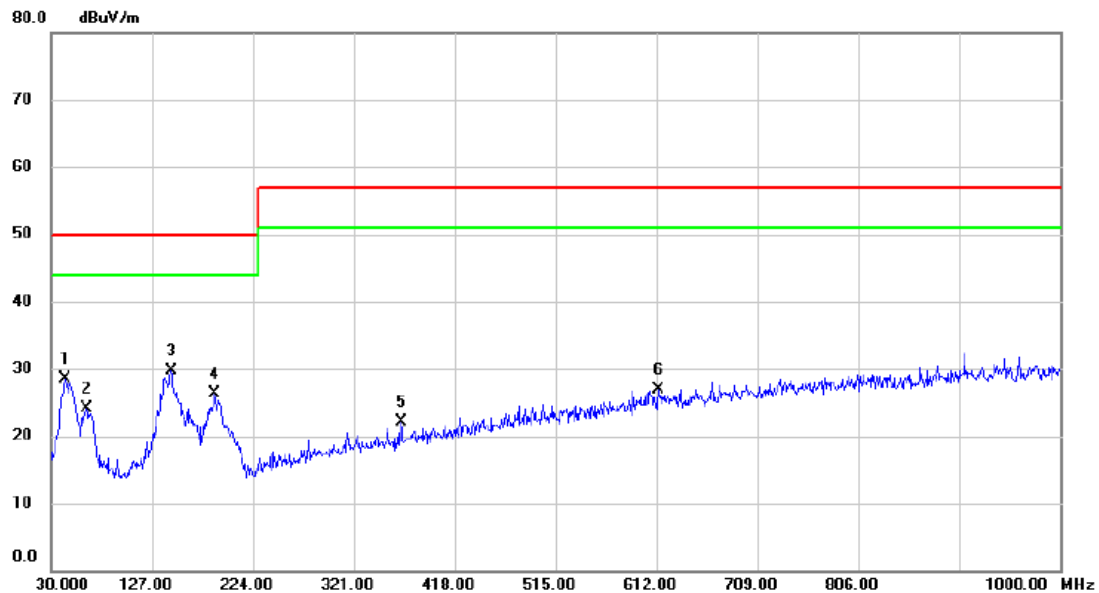

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		43.5800	42.20	-13.63	28.57	50.00	-21.43	QP	
2		63.9500	35.33	-11.29	24.04	50.00	-25.96	QP	
3	*	145.4300	42.01	-12.30	29.71	50.00	-20.29	QP	
4		187.1400	39.71	-13.35	26.36	50.00	-23.64	QP	
5		366.5900	31.47	-9.33	22.14	57.00	-34.86	QP	
6		613.9400	30.46	-3.63	26.83	57.00	-30.17	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

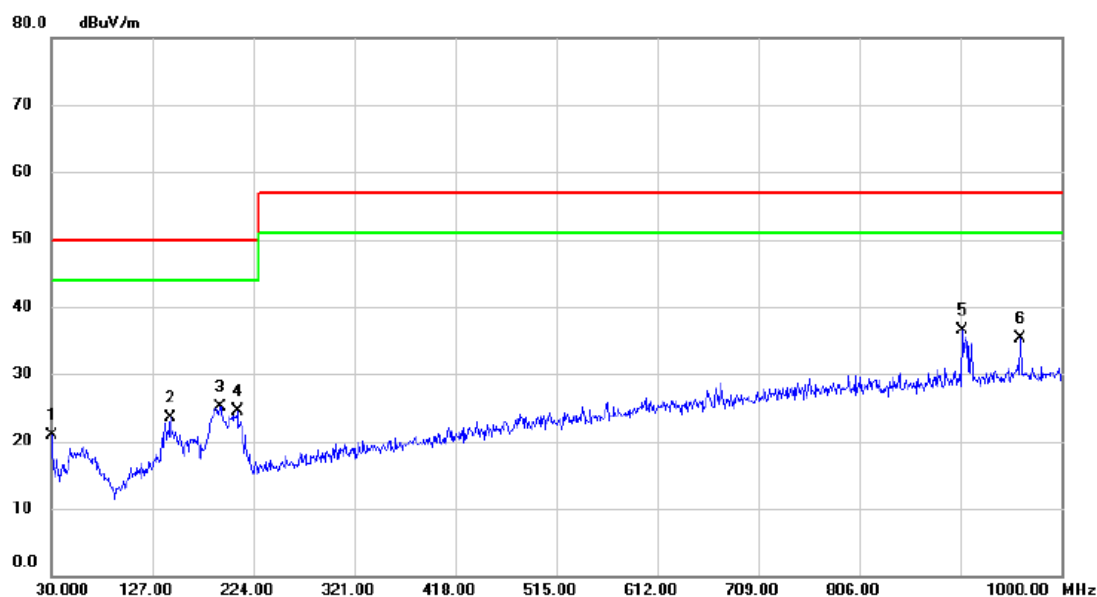

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	34.22	-13.27	20.95	50.00	-29.05	QP	
2		144.4600	35.80	-12.38	23.42	50.00	-26.58	QP	
3		191.9900	39.00	-13.84	25.16	50.00	-24.84	QP	
4		208.4800	39.05	-14.50	24.55	50.00	-25.45	QP	
5	*	904.9400	36.17	0.35	36.52	57.00	-20.48	QP	
6		960.2300	34.40	1.00	35.40	57.00	-21.60	QP	

3.2 RADIATED EMISSIONS ABOVE 1 GHZ

3.2.1 LIMITS

Class A equipment above 1 GHz

Frequency Range MHz	Measurement			Class A limits dB(μV/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	56
3000 - 6000				60
1000 - 3000			Peak / 1 MHz	76
3000 - 6000				80

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F _x)	Highest measured frequency
F _x ≤ 108 MHz	1 GHz
108 < F _x ≤ 500 MHz	2 GHz
500 < F _x ≤ 1000 MHz	5 GHz
F _x > 1 GHz	5 x F _x up to a maximum of 6 GHz

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS-Lindgren	3115	75846	Mar. 20, 2025
2	Amplifier	EMC INSTRUMENT	EMC118A45SE	9801002	Nov. 17, 2024
3	Cable	RW	LMR-400(1GHz-18GHz)(12.5m+1M)	N/A	Mar. 25, 2025
4	Controller	MF	MF-7802BS	N/A	N/A
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	EMI Test Receiver	Keysight	N9038A	MY56400060	Dec. 22, 2024

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.2.3 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation

3.2.5 TEST SETUP

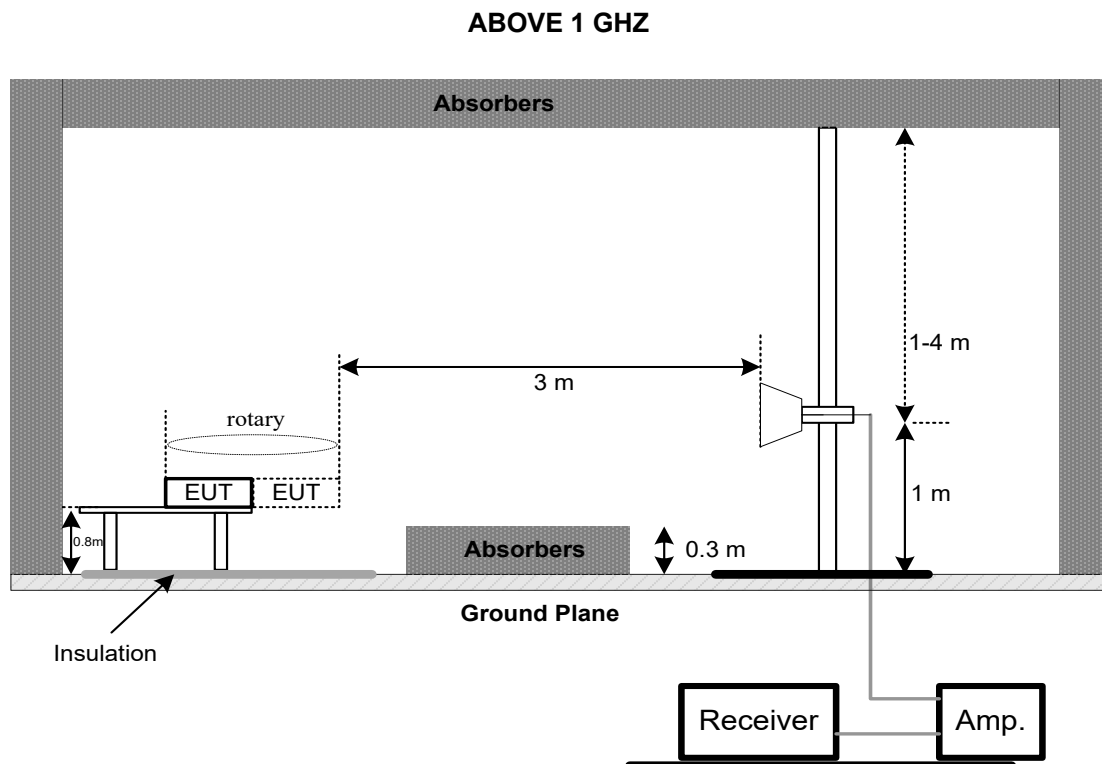

3.2.6 MEASUREMENT DISTANCE

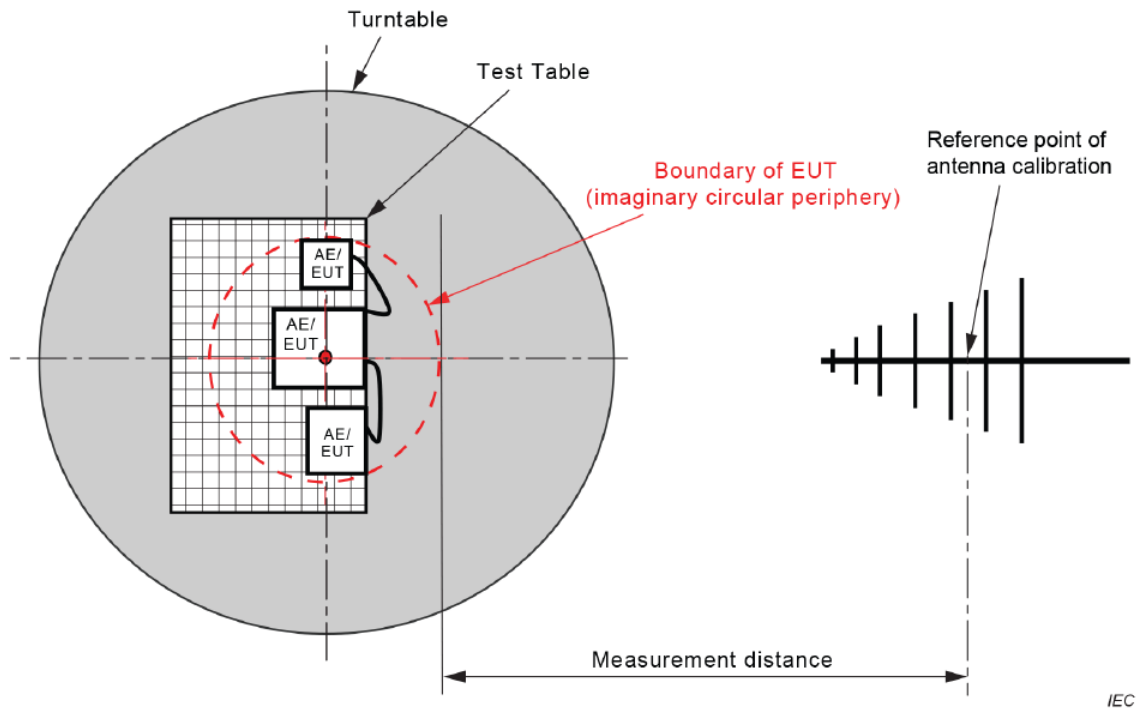


Figure C.1 – Measurement distance


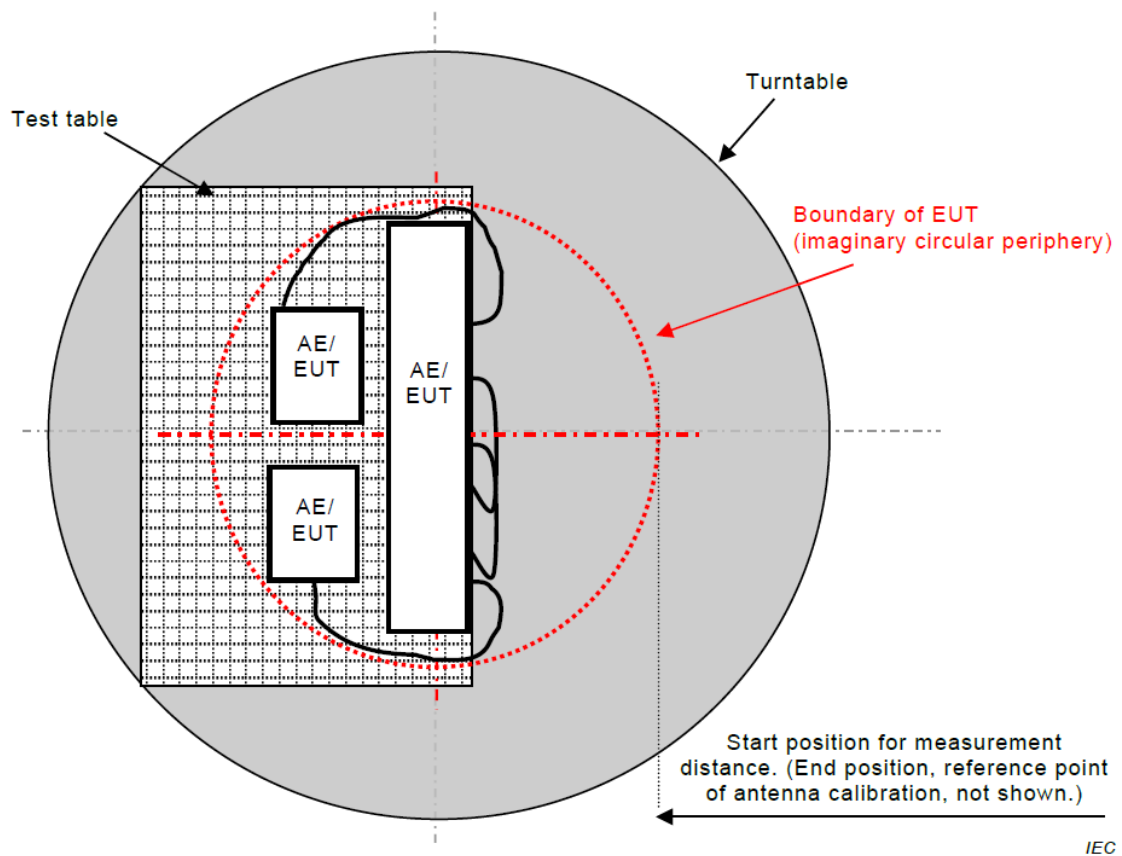


Figure C.2 – Boundary of EUT, Local AE and associated cabling


3.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 1		

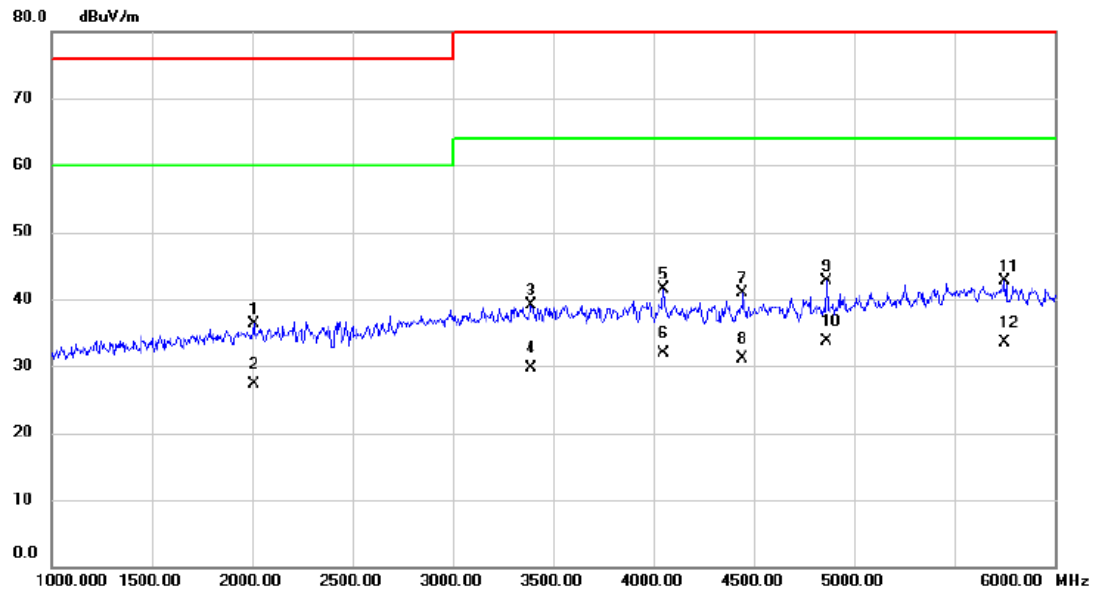

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2007.500	39.50	-3.14	36.36	76.00	-39.64	peak	
2	2007.500	30.45	-3.14	27.31	60.00	-32.69	AVG	
3	3392.500	38.54	0.59	39.13	80.00	-40.87	peak	
4	3392.500	29.05	0.59	29.64	64.00	-34.36	AVG	
5	4052.500	39.52	1.94	41.46	80.00	-38.54	peak	
6	4052.500	30.05	1.94	31.99	64.00	-32.01	AVG	
7	4445.000	38.91	2.01	40.92	80.00	-39.08	peak	
8	4445.000	29.05	2.01	31.06	64.00	-32.94	AVG	
9	4865.000	39.83	2.87	42.70	80.00	-37.30	peak	
10 *	4865.000	30.78	2.87	33.65	64.00	-30.35	AVG	
11	5750.000	37.18	5.44	42.62	80.00	-37.38	peak	
12	5750.000	28.04	5.44	33.48	64.00	-30.52	AVG	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 1		

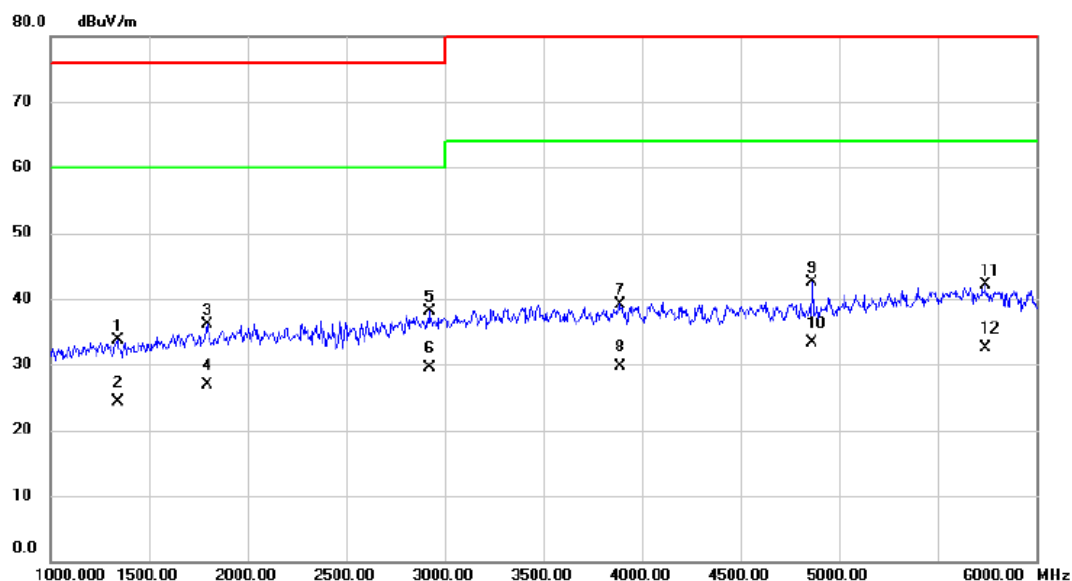

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1340.000	39.84	-6.17	33.67	76.00	-42.33	peak	
2		1340.000	30.48	-6.17	24.31	60.00	-35.69	AVG	
3		1795.000	40.27	-4.12	36.15	76.00	-39.85	peak	
4		1795.000	31.05	-4.12	26.93	60.00	-33.07	AVG	
5		2922.500	39.00	-0.93	38.07	76.00	-37.93	peak	
6	*	2922.500	30.48	-0.93	29.55	60.00	-30.45	AVG	
7		3887.500	37.49	1.71	39.20	80.00	-40.80	peak	
8		3887.500	28.05	1.71	29.76	64.00	-34.24	AVG	
9		4865.000	39.61	2.87	42.48	80.00	-37.52	peak	
10		4865.000	30.48	2.87	33.35	64.00	-30.65	AVG	
11		5742.500	36.68	5.45	42.13	80.00	-37.87	peak	
12		5742.500	27.05	5.45	32.50	64.00	-31.50	AVG	

3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class A equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class A Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	79
0.5 - 30			73
0.15 - 0.5	AMN	Average / 9 kHz	66
0.5 - 30			60

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100526	Jun. 16, 2024
2	EMI Test Receiver	R&S	ESR3	101862	Dec. 22, 2024
3	Cable	N/A	SFT205-NMNM-12 M-001	12M	Nov. 27, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.3.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.4 DEVIATION FROM TEST STANDARD


No deviation

3.3.5 TEST SETUP

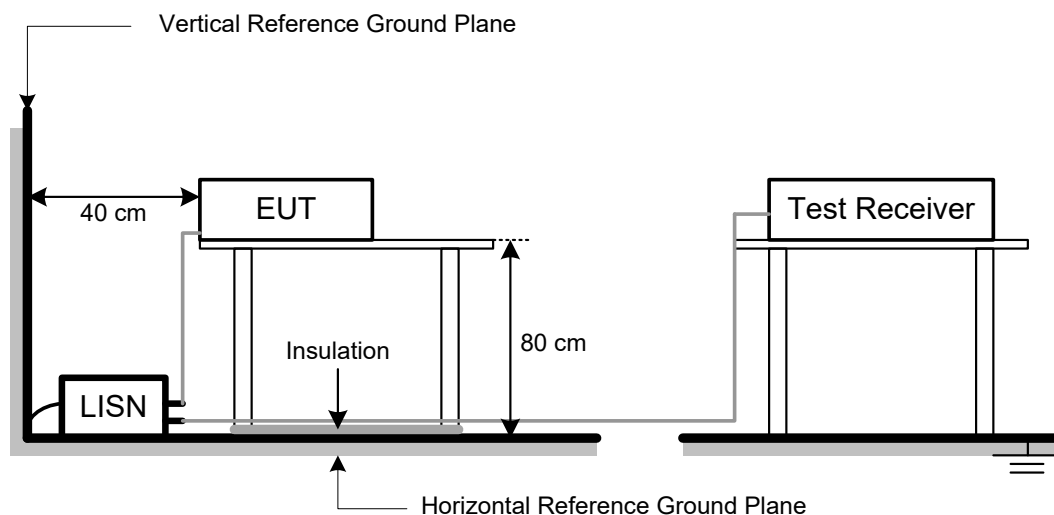


3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 2		

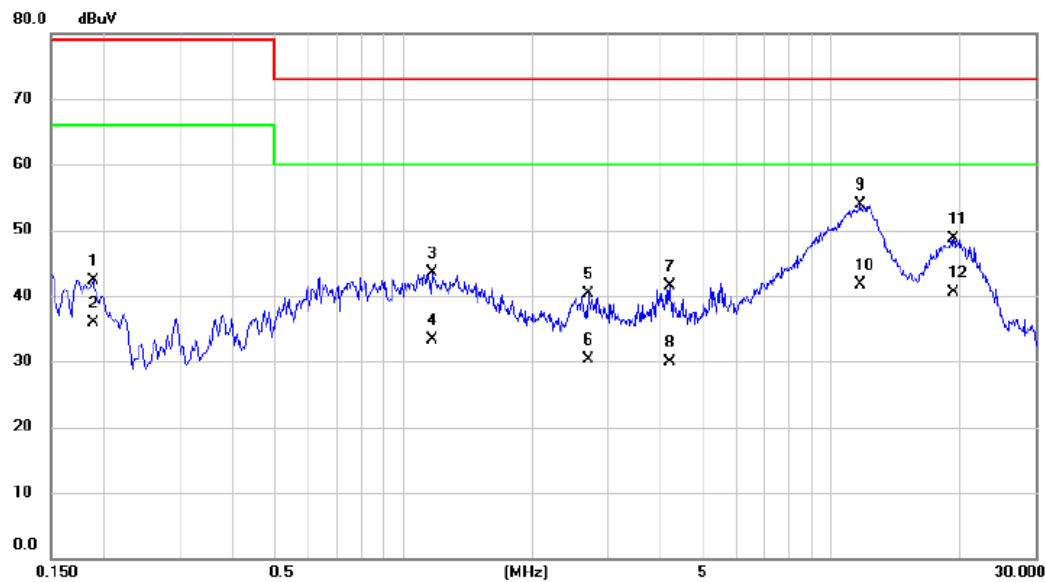

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1883	31.52	10.73	42.25	79.00	-36.75	QP	
2	0.1883	25.10	10.73	35.83	66.00	-30.17	AVG	
3	1.1647	32.73	10.72	43.45	73.00	-29.55	QP	
4	1.1647	22.50	10.72	33.22	60.00	-26.78	AVG	
5	2.7015	29.36	10.93	40.29	73.00	-32.71	QP	
6	2.7015	19.30	10.93	30.23	60.00	-29.77	AVG	
7	4.2000	30.24	11.23	41.47	73.00	-31.53	QP	
8	4.2000	18.70	11.23	29.93	60.00	-30.07	AVG	
9	11.6565	40.56	13.41	53.97	73.00	-19.03	QP	
10 *	11.6565	28.30	13.41	41.71	60.00	-18.29	AVG	
11	19.2413	32.76	15.86	48.62	73.00	-24.38	QP	
12	19.2413	24.70	15.86	40.56	60.00	-19.44	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 2		

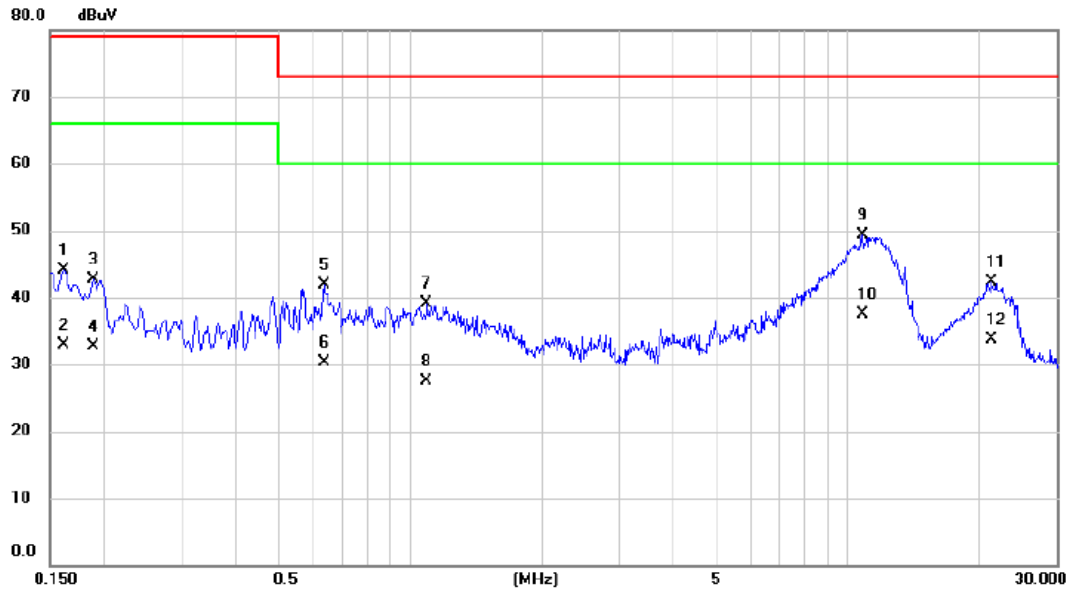

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1612	34.41	9.75	44.16	79.00	-34.84	QP	
2	0.1612	23.10	9.75	32.85	66.00	-33.15	AVG	
3	0.1882	32.96	9.77	42.73	79.00	-36.27	QP	
4	0.1882	22.90	9.77	32.67	66.00	-33.33	AVG	
5	0.6360	31.97	9.84	41.81	73.00	-31.19	QP	
6	0.6360	20.50	9.84	30.34	60.00	-29.66	AVG	
7	1.0904	29.23	9.92	39.15	73.00	-33.85	QP	
8	1.0904	17.60	9.92	27.52	60.00	-32.48	AVG	
9	10.8285	36.62	12.66	49.28	73.00	-23.72	QP	
10 *	10.8285	24.90	12.66	37.56	60.00	-22.44	AVG	
11	21.2572	26.71	15.51	42.22	73.00	-30.78	QP	
12	21.2572	18.20	15.51	33.71	60.00	-26.29	AVG	

3.4 HARMONIC CURRENT EMISSIONS TEST

3.4.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

3.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 16, 2024
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 16, 2024
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


3.4.3 TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- The classification of EUT is according to of EN IEC 61000-3-2. The EUT is classified as Class A.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

3.4.4 DEVIATION FROM TEST STANDARD

No deviation


3.4.5 TEST SETUP

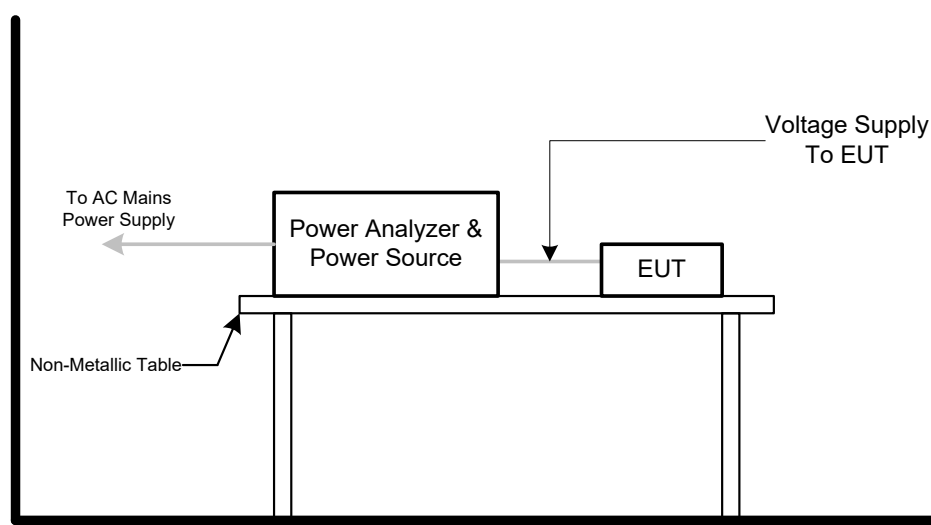


3.4.6 TEST RESULTS

Harmonics – Class-A	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2

Current & voltage waveforms

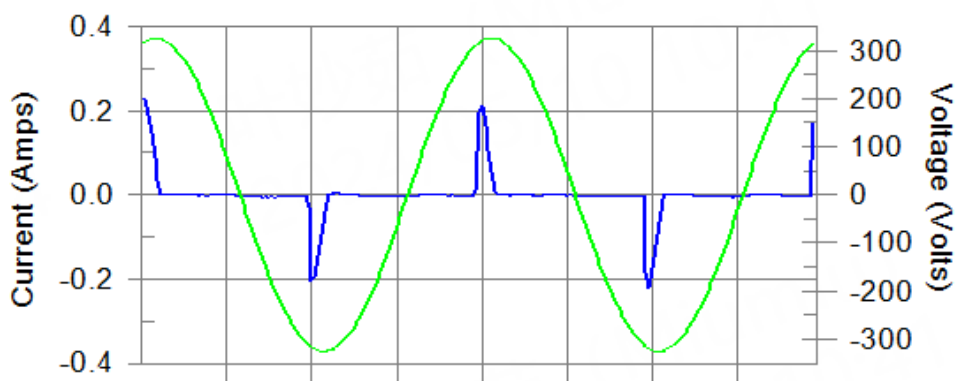

Harmonics and Class A limit line European Limits

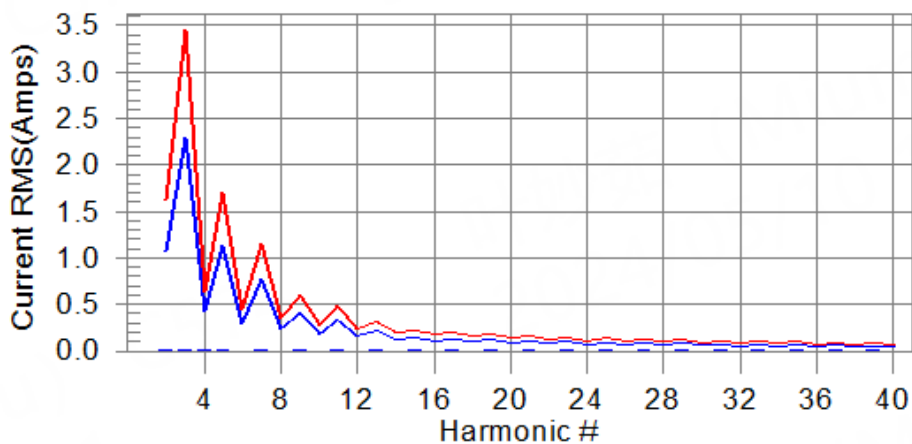

Test result: Pass Worst harmonics H15-3.1% of 150% limit, H17-4.2% of 100% limit

Current Test Result Summary (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2

Highest parameter values during test:

V RMS (Volts): 229.96
 I Peak (Amps): 0.236
 I Fund (Amps): 0.011
 Power (Watts): 2.5

Frequency(Hz): 50.00
 I RMS (Amps): 0.036
 Crest Factor: 8.432
 Power Factor: 0.391

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.008	2.300	0.4	0.011	3.450	0.3	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.008	1.140	0.7	0.010	1.710	0.6	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.008	0.770	1.1	0.010	1.155	0.9	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.008	0.400	1.9	0.009	0.600	1.5	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.007	0.330	2.2	0.009	0.495	1.7	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.007	0.210	3.2	0.008	0.315	2.5	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.006	0.150	4.1	0.007	0.225	3.1	Pass
16	0.000	0.115	N/A	0.001	0.173	N/A	Pass
17	0.006	0.132	4.2	0.006	0.198	3.1	Pass
18	0.000	0.102	N/A	0.001	0.153	N/A	Pass
19	0.005	0.118	N/A	0.005	0.178	N/A	Pass
20	0.000	0.092	N/A	0.001	0.138	N/A	Pass
21	0.004	0.107	N/A	0.004	0.161	N/A	Pass
22	0.000	0.084	N/A	0.001	0.125	N/A	Pass
23	0.004	0.098	N/A	0.004	0.147	N/A	Pass
24	0.000	0.077	N/A	0.001	0.115	N/A	Pass
25	0.003	0.090	N/A	0.003	0.135	N/A	Pass
26	0.000	0.071	N/A	0.001	0.107	N/A	Pass
27	0.003	0.083	N/A	0.003	0.125	N/A	Pass
28	0.000	0.066	N/A	0.001	0.099	N/A	Pass
29	0.002	0.078	N/A	0.002	0.116	N/A	Pass
30	0.000	0.061	N/A	0.000	0.092	N/A	Pass
31	0.002	0.073	N/A	0.002	0.109	N/A	Pass
32	0.000	0.058	N/A	0.000	0.086	N/A	Pass
33	0.001	0.068	N/A	0.002	0.102	N/A	Pass
34	0.000	0.054	N/A	0.000	0.081	N/A	Pass
35	0.001	0.064	N/A	0.001	0.096	N/A	Pass
36	0.000	0.051	N/A	0.000	0.077	N/A	Pass
37	0.001	0.061	N/A	0.001	0.091	N/A	Pass
38	0.000	0.048	N/A	0.000	0.073	N/A	Pass
39	0.001	0.058	N/A	0.001	0.087	N/A	Pass
40	0.000	0.046	N/A	0.000	0.069	N/A	Pass

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 2

Highest parameter values during test:

Voltage (Vrms): 229.96	Frequency(Hz): 50.00
I Peak (Amps): 0.236	I RMS (Amps): 0.036
I Fund (Amps): 0.011	Crest Factor: 8.432
Power (Watts): 2.5	Power Factor: 0.391

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.132	0.460	28.65	OK
3	0.511	2.070	24.69	OK
4	0.067	0.460	14.53	OK
5	0.061	0.920	6.59	OK
6	0.039	0.460	8.42	OK
7	0.037	0.690	5.30	OK
8	0.020	0.460	4.40	OK
9	0.040	0.460	8.61	OK
10	0.026	0.460	5.68	OK
11	0.021	0.230	8.97	OK
12	0.019	0.230	8.37	OK
13	0.018	0.230	7.68	OK
14	0.016	0.230	6.93	OK
15	0.015	0.230	6.56	OK
16	0.017	0.230	7.48	OK
17	0.009	0.230	3.75	OK
18	0.013	0.230	5.87	OK
19	0.013	0.230	5.60	OK
20	0.018	0.230	7.66	OK
21	0.010	0.230	4.22	OK
22	0.011	0.230	4.63	OK
23	0.012	0.230	5.09	OK
24	0.006	0.230	2.53	OK
25	0.006	0.230	2.72	OK
26	0.008	0.230	3.54	OK
27	0.007	0.230	2.86	OK
28	0.008	0.230	3.69	OK
29	0.008	0.230	3.35	OK
30	0.006	0.230	2.72	OK
31	0.006	0.230	2.54	OK
32	0.006	0.230	2.46	OK
33	0.008	0.230	3.33	OK
34	0.004	0.230	1.56	OK
35	0.004	0.230	1.55	OK
36	0.003	0.230	1.43	OK
37	0.006	0.230	2.77	OK
38	0.003	0.230	1.52	OK
39	0.003	0.230	1.09	OK
40	0.006	0.230	2.60	OK

3.5 VOLTAGE FLUCTUATIONS (FLICKER) TEST

3.5.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	≤ 1.0 , $T_p = 10$ min.	Short Term Flicker Indicator
Plt	≤ 0.65 , $T_p = 2$ hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Change
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	≤ 500 ms	Relative V-change characteristic

3.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jun. 16, 2024
2	3KVA AC Power source	California Instruments	3001ix	56309	Jun. 16, 2024
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


3.5.3 TEST PROCEDURE

- Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

3.5.4 DEVIATION FROM TEST STANDARD

No deviation

3.5.5 TEST SETUP

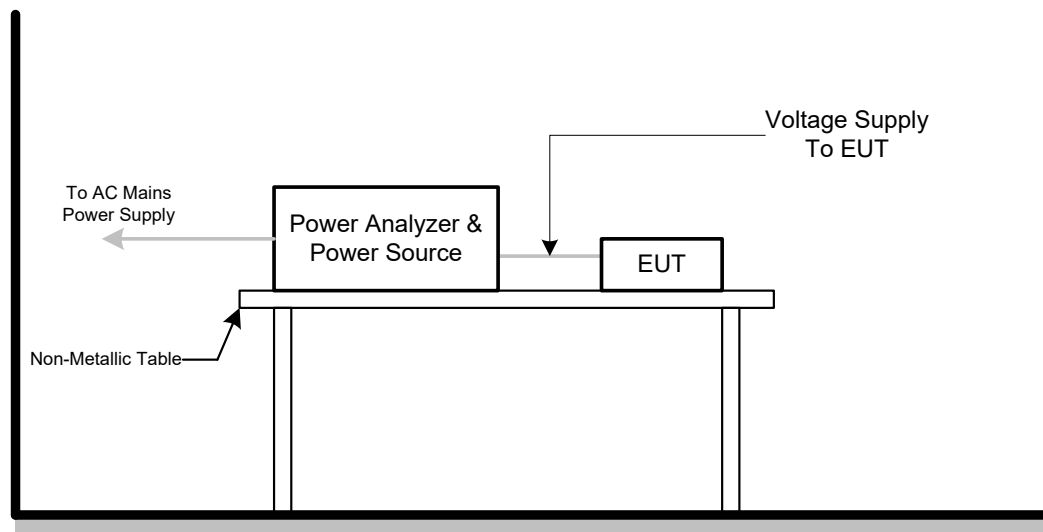


3.5.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 2

Pst and limit line

European Limits

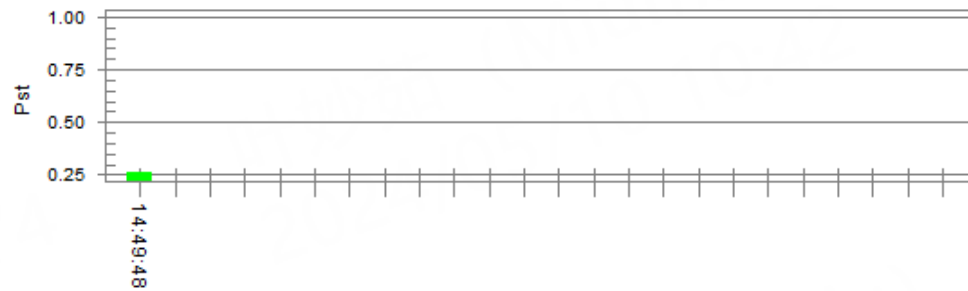

Plt and limit line

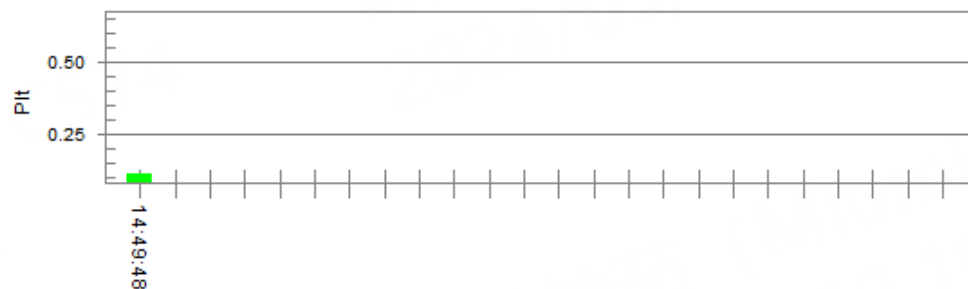

Parameter values recorded during the test:

Vrms at the end of test (Volt): 229.86

Highest dt (%):

0

T-max (mS):

0.00

Highest dc (%):

0.00

Highest dmax (%):

0.00

Highest Pst (10 min. period):

0.261

Highest Plt (2 hr. period):

0.114

Test limit (%):

Test limit (mS):

500.0

Pass

Test limit (%):

3.30

Pass

Test limit (%):

4.00

Pass

Test limit:

1.000

Pass

Test limit:

0.650

Pass

4. EMC IMMUNITY TEST

4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports (NOTE 2)	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports (NOTE 2)	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	Port Type: unshielded symmetrical		
	Apply: lines to ground		
	Primary protection is Intended ±1 kV and ±4 kV 10/700(5/320)Tr/Th μs	Analogue/digital data ports (NOTE 1) & (NOTE 2)	C
	Primary protection is not Intended ±1 kV 10/700(5/320) Tr/Th μs		C
	Port type: coaxial or shielded		
	Apply: shield to ground		
	±0.5 kV 1.2/50(8/20) Tr/Th μs	Analogue/digital data ports (NOTE 1) & (NOTE 2)	B
	line to reference ground for each individual line: ±0.5 kV(peak) 1.2/50(8/20) Tr/Th μs	DC network power ports (NOTE 2)	B
Continuous induced RF disturbances IEC 61000-4-6 (CS)	±1 kV(peak) 1.2/50(8/20) Tr/Th μs (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th μs (line to earth or ground)	AC mains power ports	B
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Analogue/digital data ports (NOTE 2)	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC network power ports (NOTE 2)	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage<5% 0.5 cycle Residual voltage<70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage<5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances,repitive (BIN-R)	0.15 MHz to 0.5 MHz 107 dBuV 0.5 MHz to 10 MHz 107 dBuV to 36 dBuV 10 MHz to 30 MHz 36 dBuV to 30 dBuV	Analogue/digital data ports (Applicable only to CPE xDSL ports)	A
	0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports (Apply period based on the AC mains frequency)	A
Broadband impulse noise disturbances,isolated (BIN-I)	0.15 MHz to 30 MHz 110 dBuV	Analogue/digital data ports (Applicable only to CPE xDSL ports)	B
	0.24 ms 10 ms 300 ms	Analogue/digital data ports (Apply all burst durations)	B

Note.

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standards, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

4.3 ANNEX B (NORMATIVE) - PRINT FUNCTION

4.3.1 PERFORMANCE CRITERIA

Performance criterion A:

Apply criterion A as defined in GENERAL PERFORMANCE CRITERIA . Additionally, the following shall not occur as a consequence of the application of the disturbance:

- change of operating state;
- unintended pausing of the print operation;
- a change of print quality or legibility, as appropriate to the test pattern;
- change of character font;
- unintended line feed;
- unintended page feed;
- paper feed failure.

Performance criterion B:

Apply criterion B as defined in GENERAL PERFORMANCE CRITERIA with the following specifics and additional limitations.

Paper feed failures are allowed only if, after removal of the jammed sheets, the job is automatically recovered and there is no loss of printed information.

Any low-quality print output caused by the application of the disturbance shall not continue beyond the sheet of media being printed, or beyond the typical length of a finished page or sheet printed from continuous roll media. False indicators are permitted during the test provided that a normal operator response to that false indicator is simple (such as pressing a button). False indicators are not acceptable if they would cause the user to discard printing supplies such as ink, toner or paper, when those supplies are actually not empty or faulty. Any false indicator shall either clear automatically or after the operator's response.

After the disturbance, the print function may print the remainder of the print job at a quality level within the manufacturer's specifications. Alternately, the print function may halt processing of a print job as a result of the disturbance, but only if the operator is capable of reprinting the job (for example, a fax printing job where the image to be printed still resides in local memory). Automatically restarting the print job from the beginning is also acceptable. In any scenario, the pairing of front and back images during double-sided printing shall be correct.

Performance criterion C:

Apply criterion C as defined in GENERAL PERFORMANCE CRITERIA.

4.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

4.4.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ Contact Discharge: $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

4.4.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Nov. 12, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.4.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

- b. For TABLE-TOP equipment:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

No deviation

Nearest Wall

1 m

ESD Generator

Discharge Return Cable to GRP

To AC Main

EUT

Isolation Support (0.5mm)

HCP (1.6m x 0.8m)

80 cm

Non-Conductive Table

10 cm

VCP (50 cm x 50 cm)

ESD Generator

Discharge Return Cable to GRP

470 K Ω

470 K Ω

Ground Reference Plane (GRP) Bonded to PE

4.4.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 2

Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		4kV		- kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	A	A	-	-	-	-	-	-	-	-
2	A	A	A	A	A	A	-	-	-	-	-	-	-	-
3	A	A	A	A	A	A	-	-	-	-	-	-	-	-
Criteria	B								B				-	
Result	A								N/A				-	

Mode	HCP Contact Discharge						VCP Contact Discharge					
	4kV		- kV		- kV		4kV		- kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
Left side	A	A	-	-	-	-	A	A	-	-	-	-
Right side	A	A	-	-	-	-	A	A	-	-	-	-
Front side	A	A	-	-	-	-	A	A	-	-	-	-
Rear side	A	A	-	-	-	-	A	A	-	-	-	-
Criteria	B						B					
Result	A						A					

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED



4.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

4.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz ($\pm 1\%$)
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of the preceding frequency.
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

4.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3142B	26419	N/A
2	Amplifier	AR	50S1G4A	326720	Dec. 22, 2024
3	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Jun. 17, 2024
4	Power amplifier	MILMEGA	AS1860-50	1064834	Dec. 22, 2024
5	Microwave Log.-Per. Antenna	Schwarzbeck	STLP 9149	9149-277	N/A
6	Power amplifier	MILMEGA	80RF1000-250	1064833	Dec. 22, 2024
7	Measurement Software	Farad	(EZ-RS)V2.0.1.3	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.5.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.


- The field strength level was 3 V/m(unmodulated, r.m.s).
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. Where the frequency range is swept incrementally, the step size was 1% of the preceding frequency.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

a) For Continuous induced RF disturbances

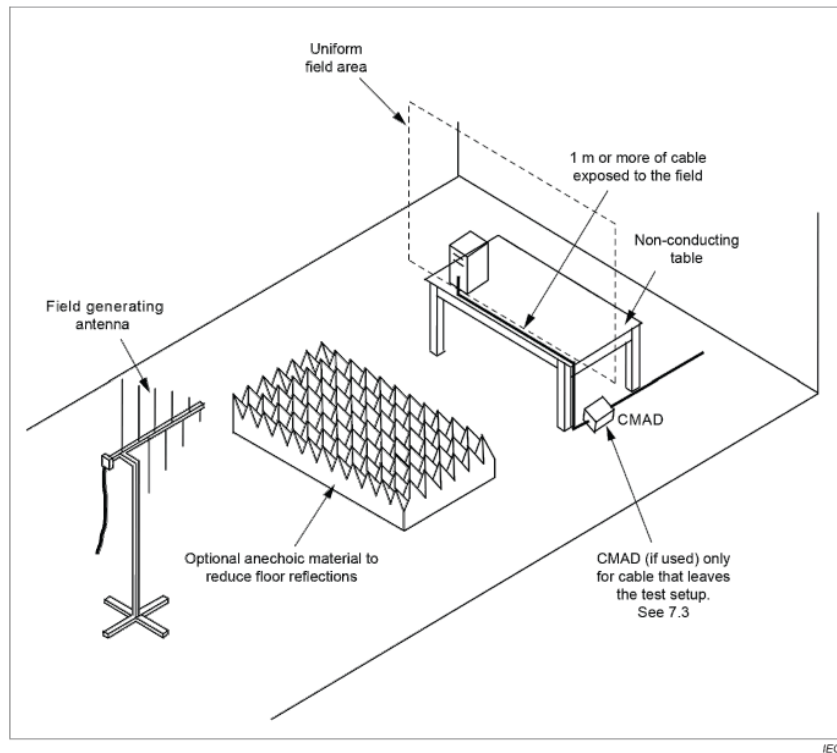

4.5.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 2

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		

4.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

4.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC mains power ports: ± 1 kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

4.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	Jun. 16, 2024
2	Measurement Software	Prima	EFT_Series V1.0 .0.0.20180710	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.6.3 TEST PROCEDURE

For TABLE-TOP equipment:

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m \pm 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

The diagram illustrates the test setup for the immunity test of a power supply unit (PSU) according to EN 61000-4-6:2016. It shows two main test configurations: (A) and (B).

Configuration (A): The PSU (EUT) is placed on an insulating support. A coupling/decoupling network (A) is connected to the AC mains supply. The EUT is connected to a ground reference plane. The distance between the AC mains supply and the EUT is specified as $>0,5\text{ m}$. The distance between the EUT and the ground reference plane is specified as $\geq 0,5\text{ m}$. The EUT is connected to the ground reference plane via a capacitive coupling clamp. The distance between the capacitive coupling clamp and the ground reference plane is specified as $0,1\text{ m}$. The EUT is connected to the ground reference plane via a grounding cable.

Configuration (B): The PSU (EUT) is placed on an insulating support. An EFT/B generator (B) is connected to the EUT. The EUT is connected to a ground reference plane. The distance between the EFT/B generator (B) and the EUT is specified as $>0,5\text{ m}$. The distance between the EUT and the ground reference plane is specified as $\geq 0,5\text{ m}$. The EUT is connected to the ground reference plane via a capacitive coupling clamp. The distance between the capacitive coupling clamp and the ground reference plane is specified as $0,1\text{ m}$. The EUT is connected to the ground reference plane via a grounding cable.

Common Components: The test setup includes an AC mains supply, an EFT/B generator (A), a coupling/decoupling network (A), an EUT, an insulating support, a ground reference plane, a capacitive coupling clamp, an EFT/B generator (B), and a grounding cable. The AC mains supply is connected to the EUT via a cable. The EFT/B generator (A) is connected to the AC mains supply. The EFT/B generator (B) is connected to the EUT. The AC mains supply is connected to the EUT via a cable. The EFT/B generator (A) is connected to the AC mains supply. The EFT/B generator (B) is connected to the EUT. The AC mains supply is connected to the EUT via a cable. The EFT/B generator (A) is connected to the AC mains supply. The EFT/B generator (B) is connected to the EUT.

4.6.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 2

EUT Ports Tested		Polarity	Repetition Frequency	Test Level 1kV	Criterion	Result
AC Power Port	Line (L)	+	5 kHz	A	B	A
		-	5 kHz	A		
	Neutral (N)	+	5 kHz	A	B	A
		-	5 kHz	A		
	L+N	+	5 kHz	A	B	A
		-	5 kHz	A		

4.7 SURGE IMMUNITY TEST (SURGE)

4.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B(AC mains power ports)
Wave-Shape	1.2/50(8/20) Tr/Th μ s combination wave
Test Voltage	AC mains power ports: ± 1 kV
Generator Source Impedance	2 Ω of the low-voltage power supply network.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90° phase Five negative pulses line-to-neutral at 270° phase
Pulse Repetition Rate	1 time / min

4.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	Jun. 16, 2024
2	Measurement Software	Prima	SUG_Series V1.0.0.7.20190827	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.7.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

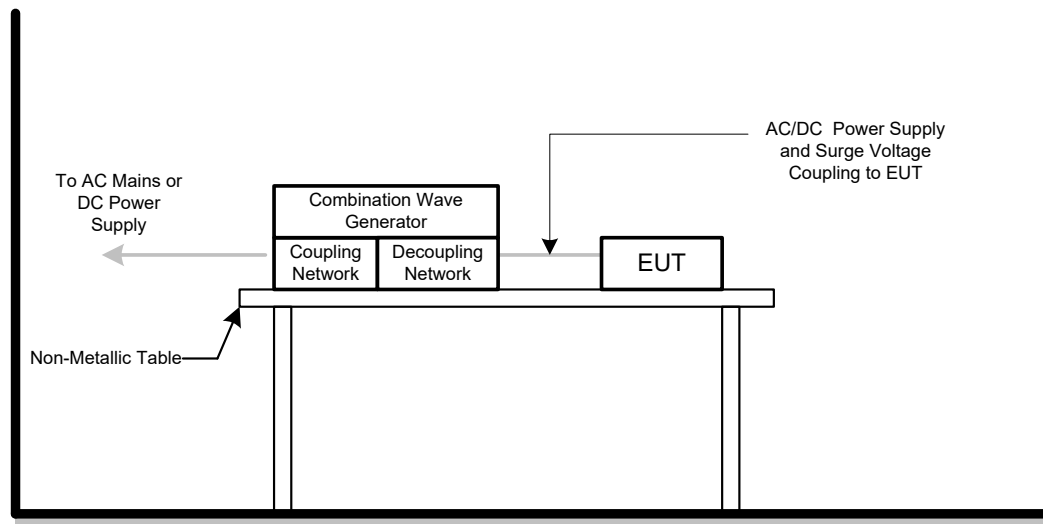

4.7.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 2

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thµs						Criterion	Result
		Polarity	Phase	Voltage					
				1kV	-- kV	-- kV	-- kV		
AC	L – N	+	90°	A	-	-	-	B	A
		-	270°	A	-	-	-		

4.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

4.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of the preceding frequency value
Dwell Time	3 seconds

4.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TEST SYSTEM FOR CONDUCTED AND RADIATED IMMUNITY	TESEQ	NSG 4070B	37513	Jun. 16, 2024
2	Attenuator	Teseq	100-SA-FFN-06	163357	Jun. 16, 2024
3	Measurement Software	Farad	EZ-CS (V2.0.1.4)	N/A	N/A
4	Power CDN	FCC	FCC-801-M2/M3 -16A	100270	Dec. 22, 2024
5	Coupling Decoupling Network	Teseq GmbH	CDN M016	35834	Jun. 16, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.8.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.


The other condition as following manner:

- The field strength level was 3 V (unmodulated, r.m.s.)
- The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sinewave. Where the frequency range is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP

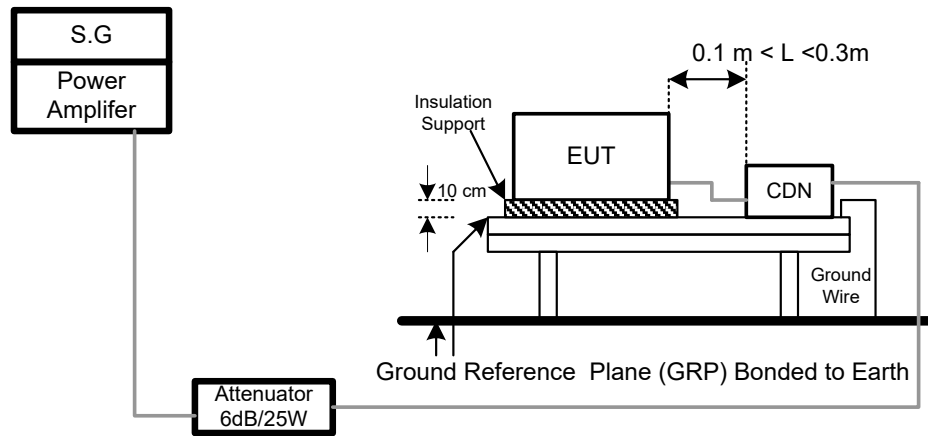

4.8.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 2

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			

4.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

4.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

4.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	4032	Dec. 22, 2024
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	4024	Dec. 22, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.9.3 TEST PROCEDURE

For TABLE-TOP equipment:

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.


The other condition as following manner:

- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

4.9.4 DEVIATION FROM TEST STANDARD

No deviation

4.9.5 TEST SETUP

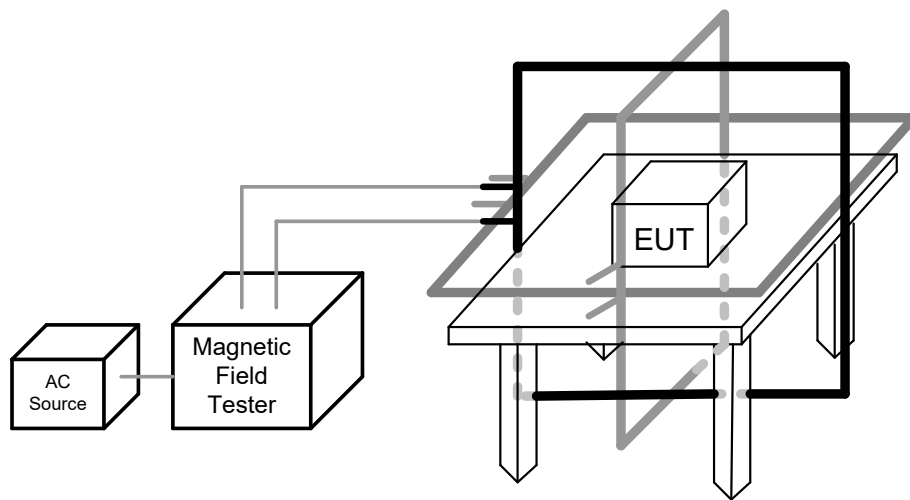

4.9.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 2

50Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

60Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

4.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

4.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

4.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	Jun. 16, 2024

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


4.10.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

4.10.4 DEVIATION FROM TEST STANDARD

No deviation

4.10.5 TEST SETUP

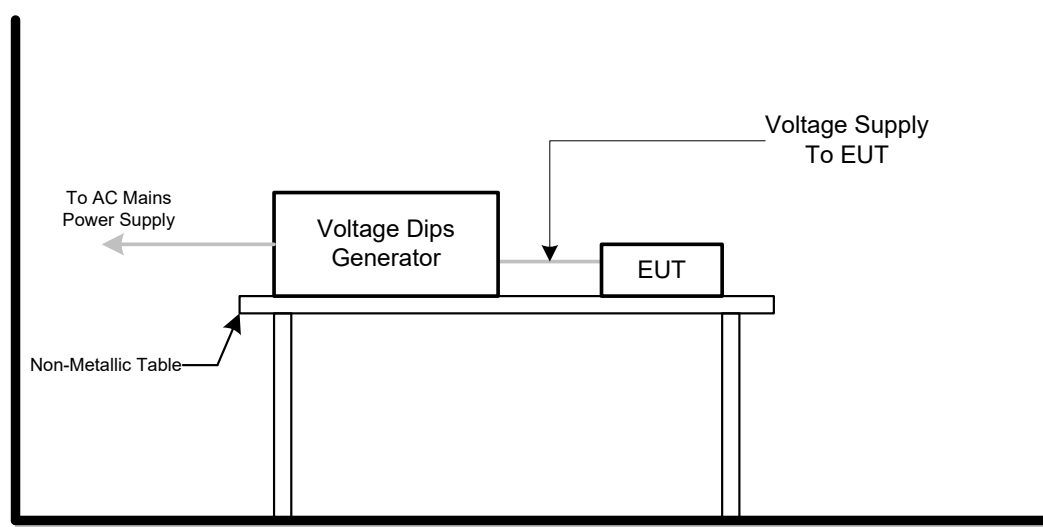

4.10.6 TEST RESULTS

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode	Mode 1-Mode 2


AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	B

AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	B



AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	B

5. EUT TEST PHOTO


Radiated emissions up to 1 GHz

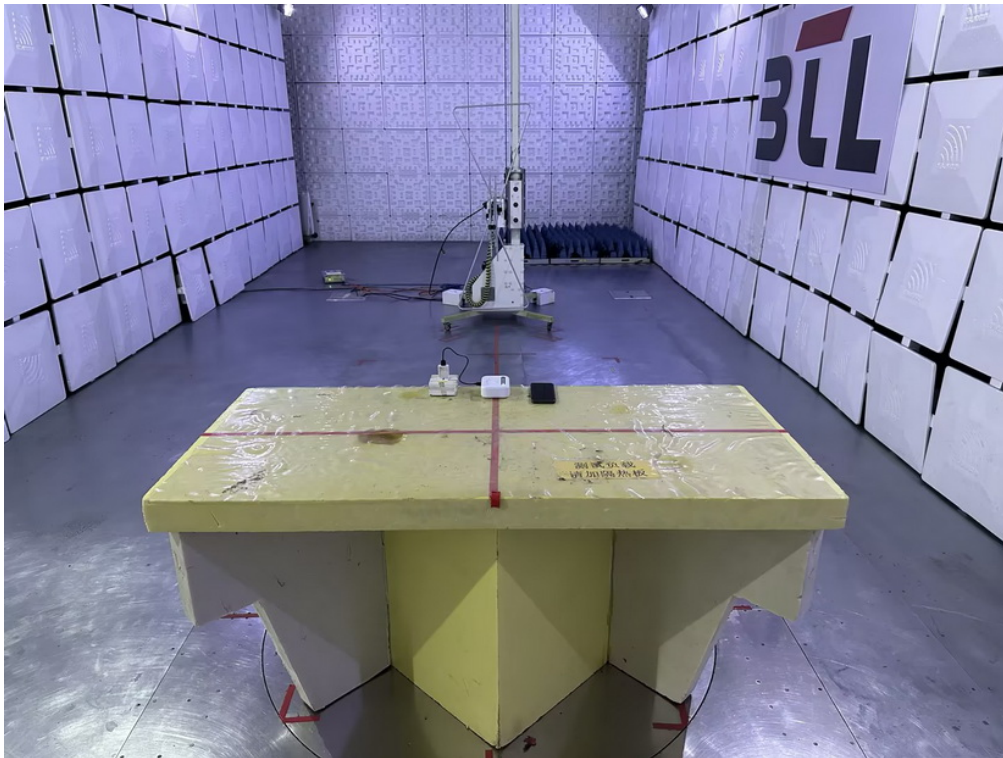


Radiated emissions above 1 GHz

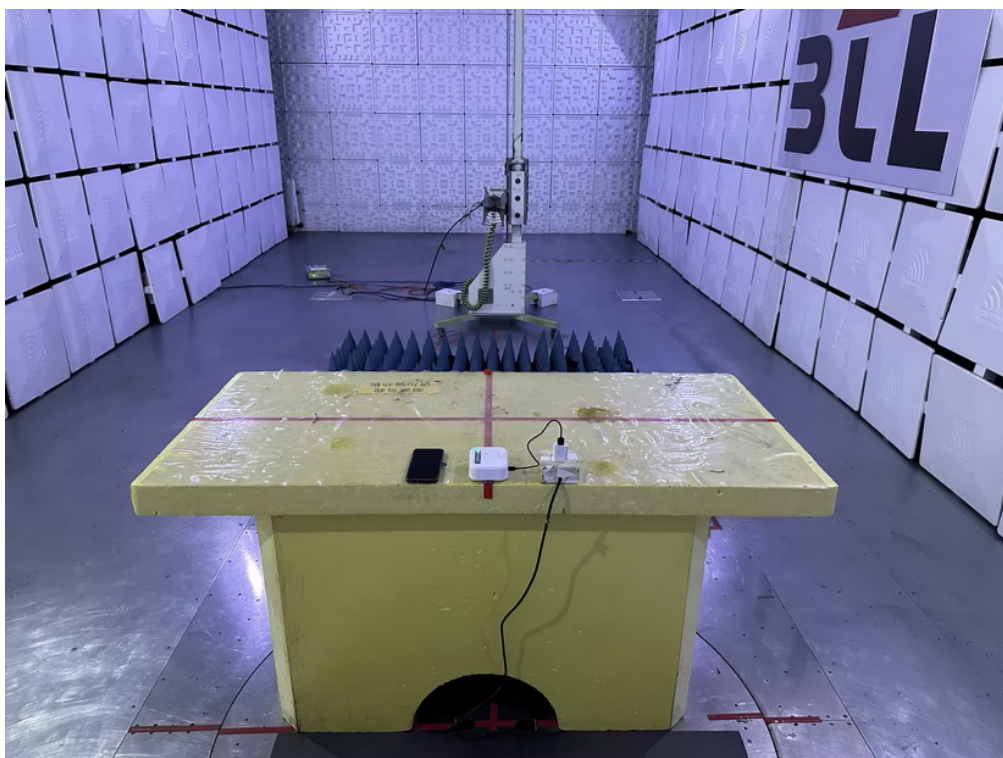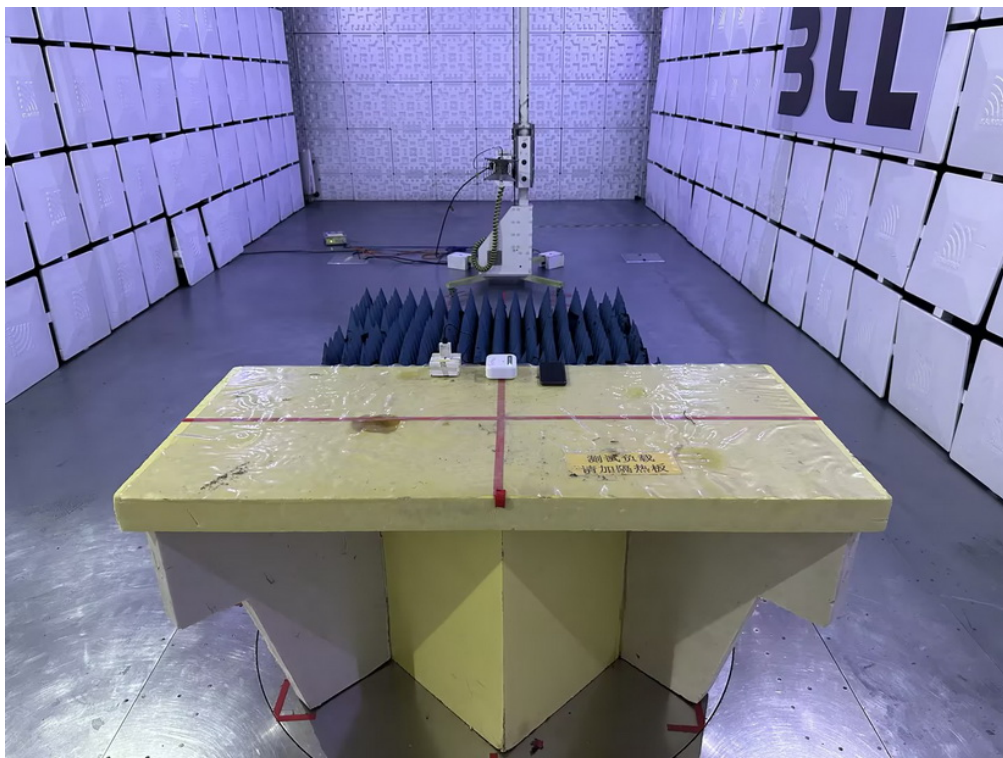


Conducted emissions AC mains power port

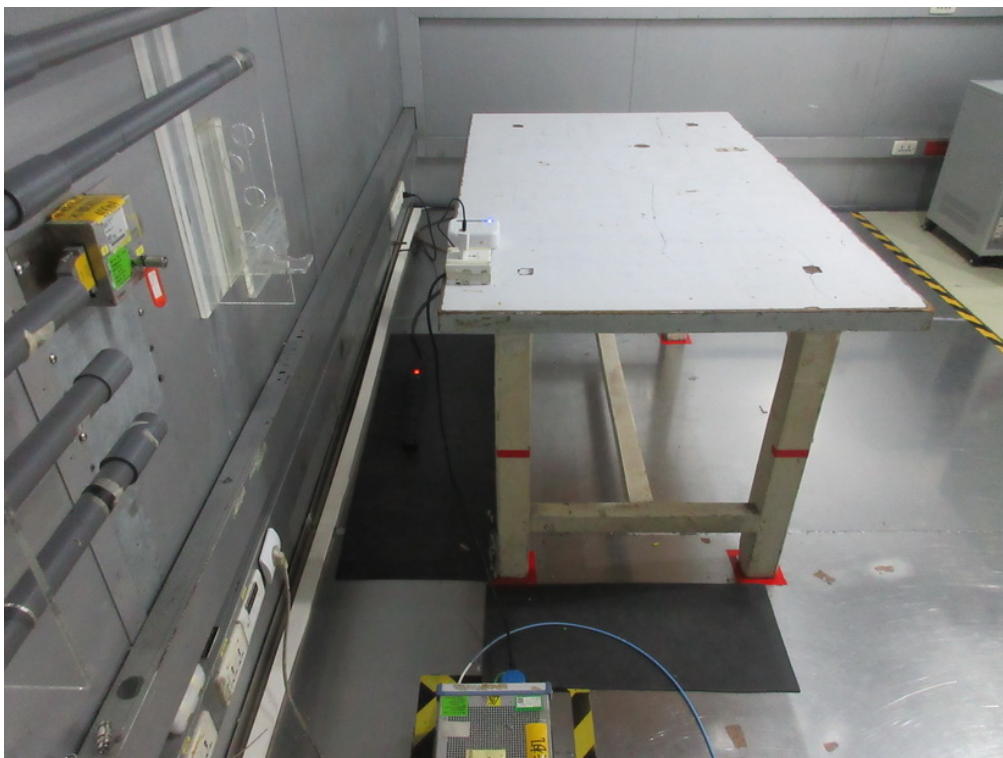


Harmonic current

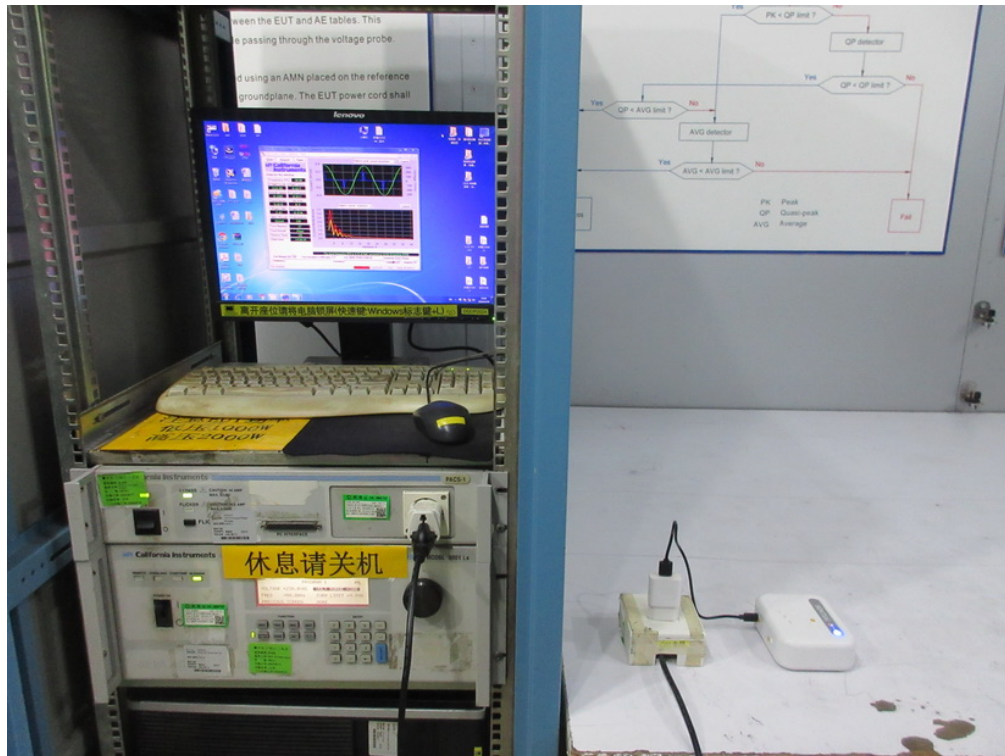


Voltage fluctuations (Flicker)

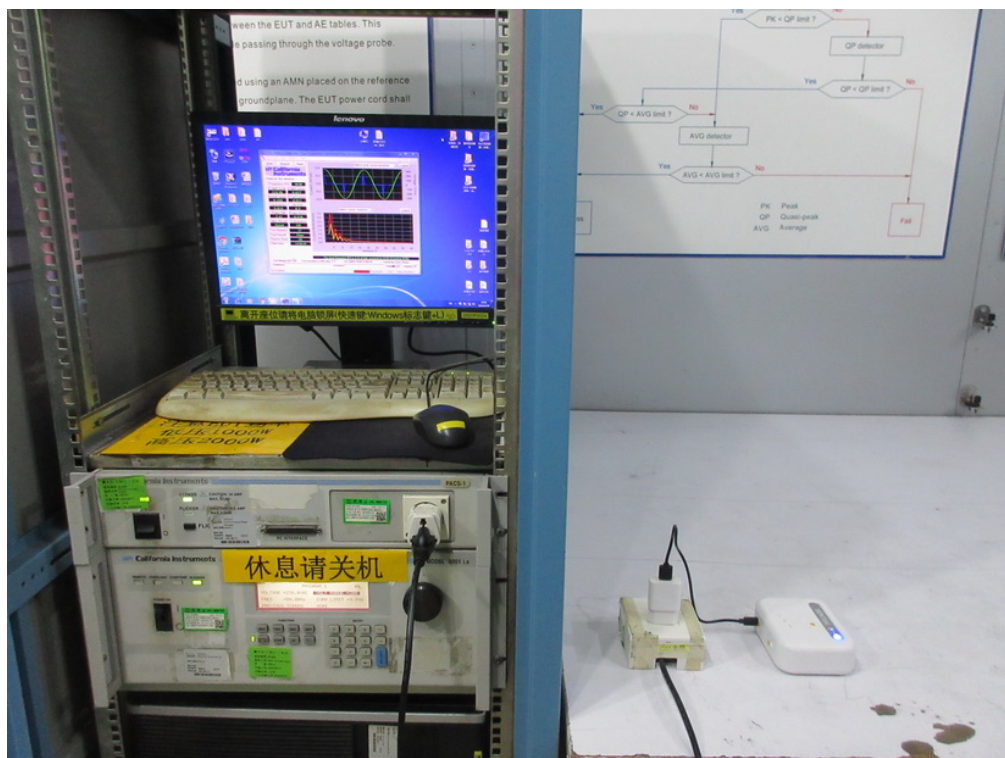

Electrostatic discharge immunity

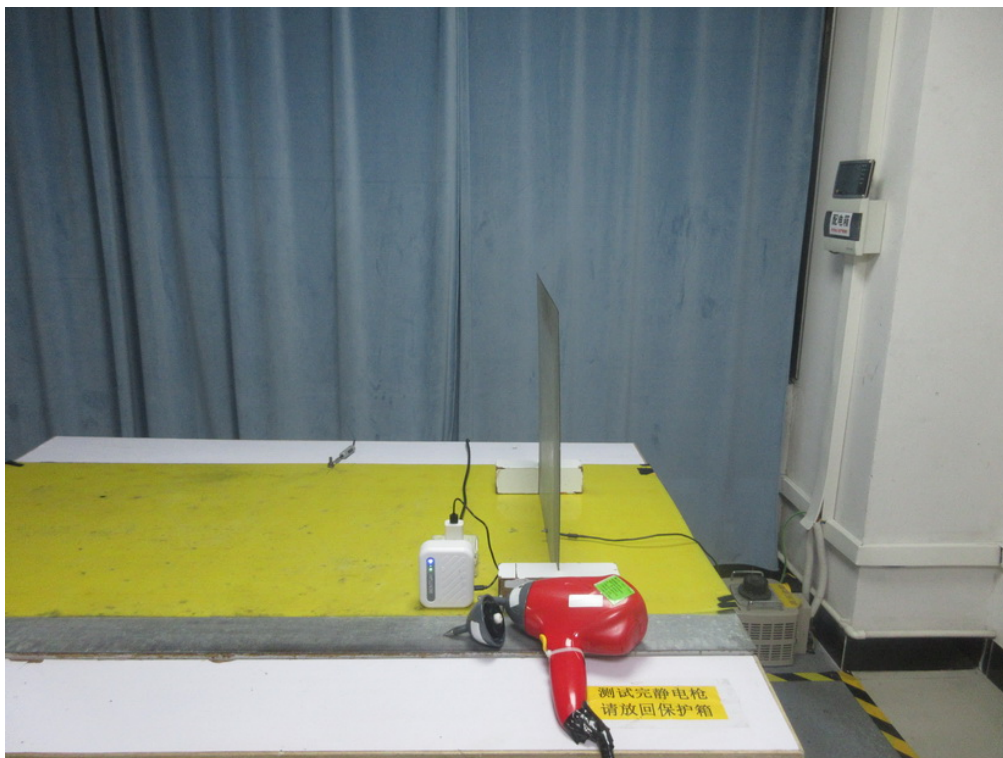


Radiated, radio-frequency, electromagnetic field immunity – Up to 1GHz

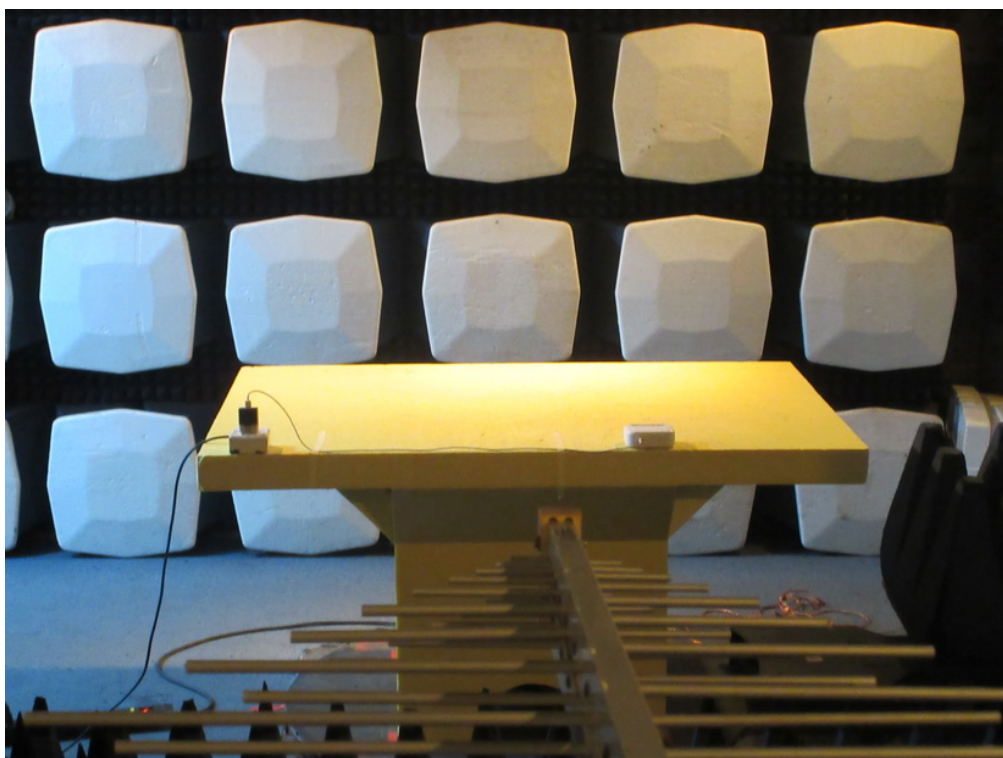


Radiated, radio-frequency, electromagnetic field immunity – Above 1GHz




Electrical fast transient/burst immunity - AC

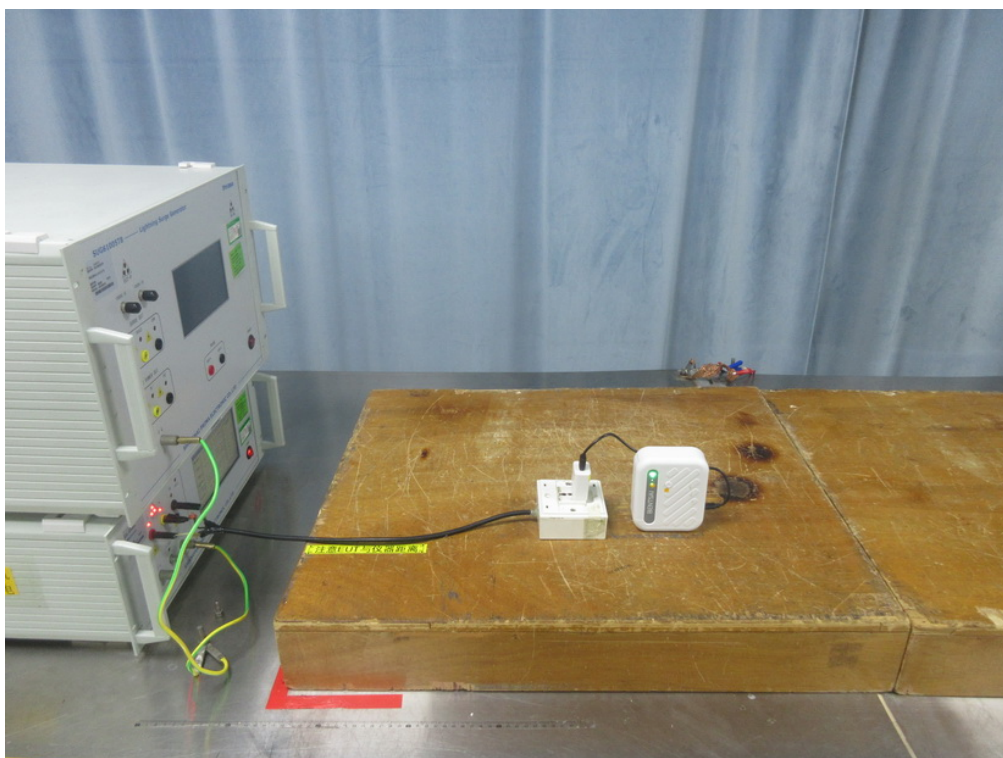


Surge immunity - AC

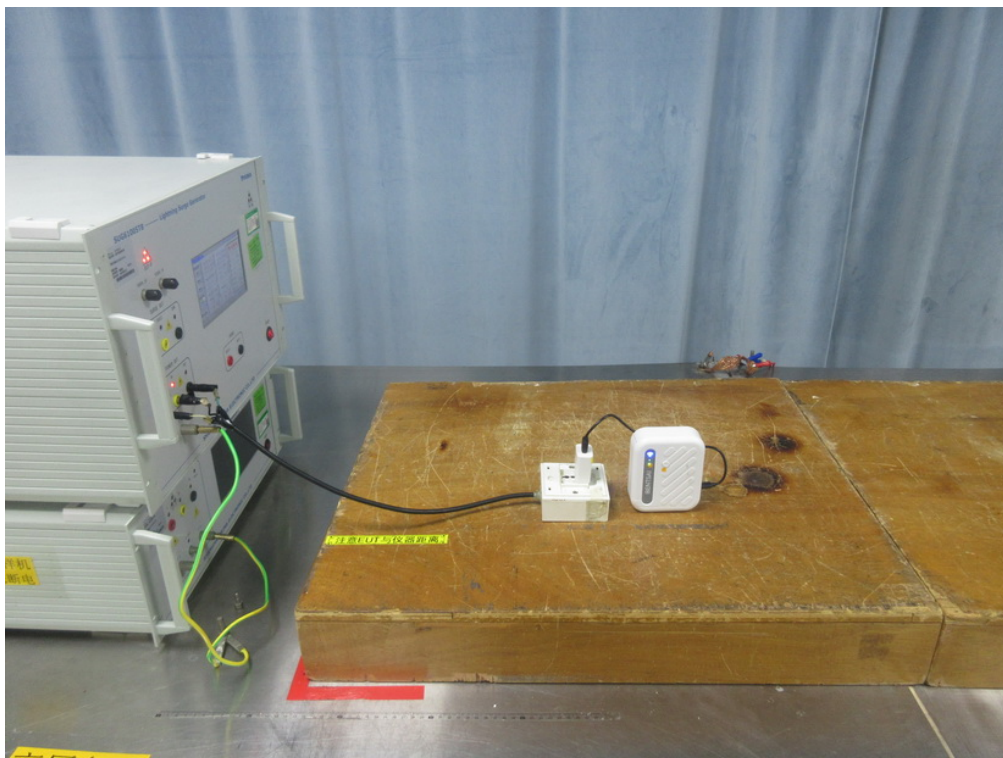


Immunity to conducted disturbances, induced by radio-frequency fields - AC

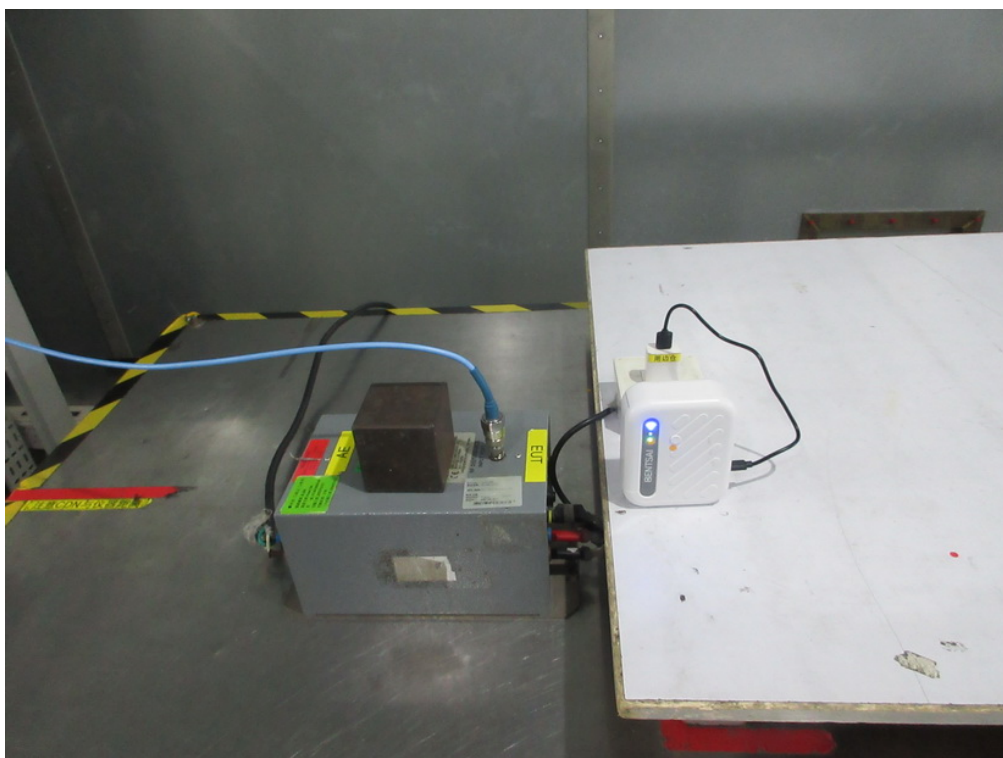

Power frequency magnetic field immunity

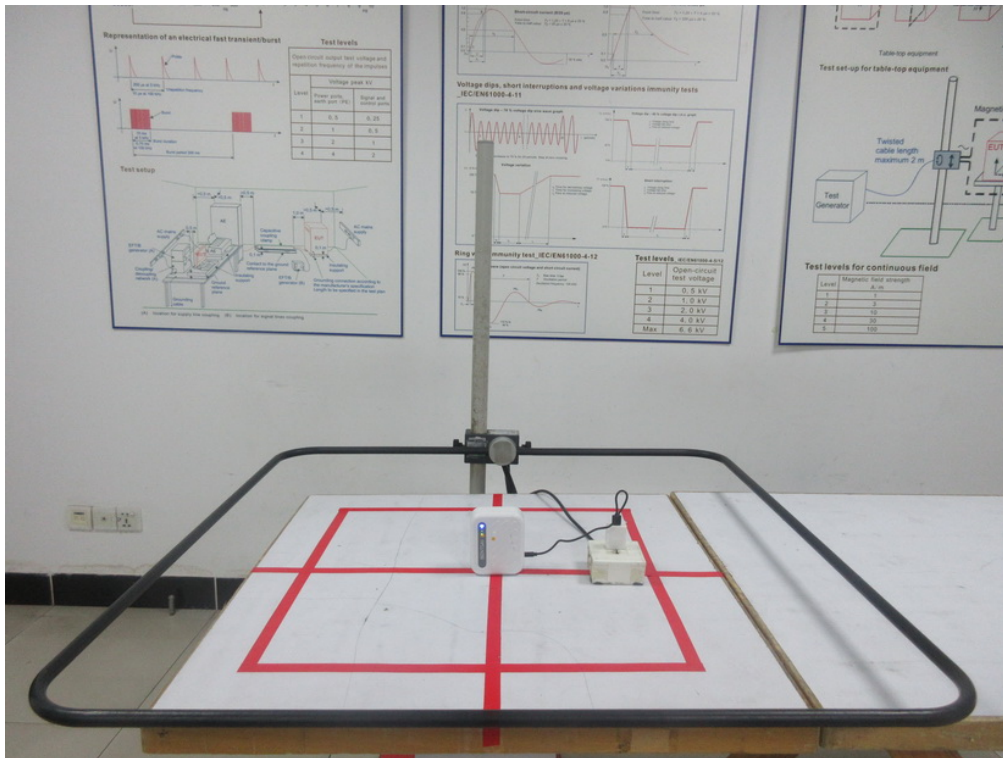

Voltage dips, short interruptions and voltage variations immunity

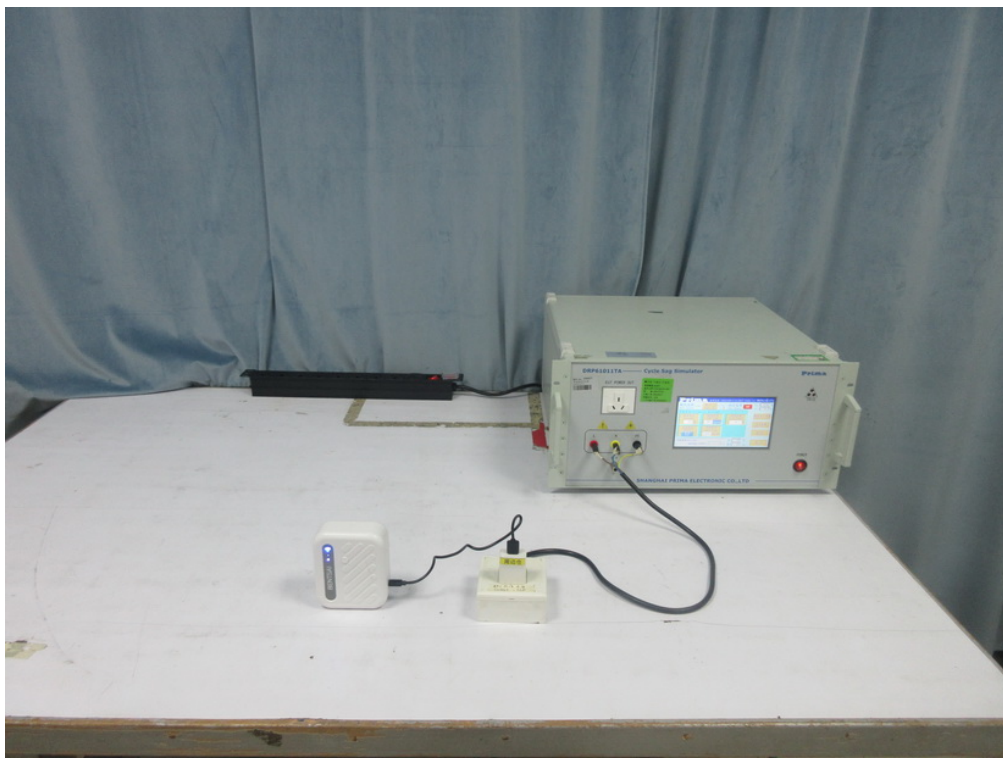

End of Test Report