




Industrial InkJet Coding Printers

Supports upto 2 printheads, 0.5 inch printhead

E62 Series

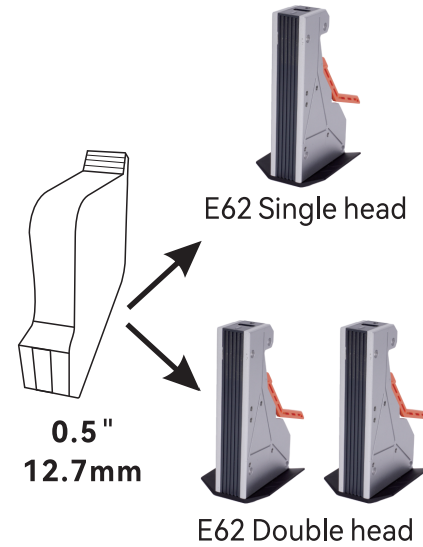

120m/min
high-speed printing

One customer one code,
exclusive ASIC encryption chip

One-click for the ink cost

Intelligent interface,
easy and fast

Access management,
privacy protection

Universal Master Control,
free combination

Product Model	E62-1-1 (1 printhead, 1*12.7mm)/E62-2-1/E62-1-2 (2 printheads, 2*12.7 mm)	
Printing Technology	Thermal Inkjet (TIJ)	
Ink Throw Distance	2-5mm (Distance between nozzle plate and print object)	
Optional Ink Cartridges	Water based (42ml): Black, Cyan, Magenta, Yellow, Green Solvent Based (42ml): Black, Cyan, Magenta, Yellow, White, Green, Security	
Operation System	Linux based	
System Language	Chinese/English/German/Arabic/Spanish/Russian/Japanese/Korean/Italian/ Portuguese/French/Hindi/Thai/Vietnamese/Persian/Turkish/Chinese Traditional/ Indonesian/Slovenian/Serbo-Croatian/Czech/Bulgarian/Romanian/Polish/Greek/ Hungarian/Ukrainian/Slovak/Burmese (Available languages vary for different regions)	
Display	7" High Definition Touch Screen	
Status Alarm	Green: Ready Blue: Printing Red: Alarm	
Print Applications	Text, Numbers, Images, Logos, 2D codes, Barcodes, Dates, Counter, Database etc. Water based ink for porous and semi porous substrates: Paper/Corrugated box/ Wooden/Fiberboard/Cotton etc. Solvent based ink for semi porous and non porous substrates: Plastic/Glass/Metal plates/Alu-foils/Cables etc.	
Printabel Material	Code128, Code128B, Code39, EAN8, EAN13, UPCA, UPCE, EAN128, INT 2of5, ITF14, Code93, GS1RSS144, GS1-EAN128, GS1-Truncated, GS1RS144Limit, GS1RSS14EX, GS1-Stacked, GS1-StackedOmni, GS1-StackedEx	
Barcode Type	DataMatrix, QR, GridMatrix, GS1DM, PDF417	
2D code Type	True type fonts, Dotmatrix fonts	
Font Type	X-direction DPI: 75/100/150/200/300/600/1200/2400 Y-direction DPI: 300/600	
Resolution	Up to 120m/minute, speed adjustable based on the horizontal resolution	
Print Speed	1-10	
Grey level	12.7mm*2100mm 25.4mm*2100mm	
Max. Print Size	566px*12800px (Max 1000px*12800px)	
Max. Pixel Size	Ethernet, USB, Photocell, Encoder, Beacon, Power Adapter	
External Ports	Input: AC100-240V Output: DC24V 4A	
Power Adapter	Equipment Storage Temperature: -20°C-55°C Working Temperature: 5°C-35°C (Best: 15°C-35°C) Humidity: 10%-80%	
Working Environment	8 Gigabytes	
Memory Size	Single head 4.2kg, Dual head combined 4.5kg, Separated 4.9kg	
Net Weight		