




Industrial InkJet Coding Printers

Free combination, supports upto 4 printheads, max print height 100mm

E64X Series

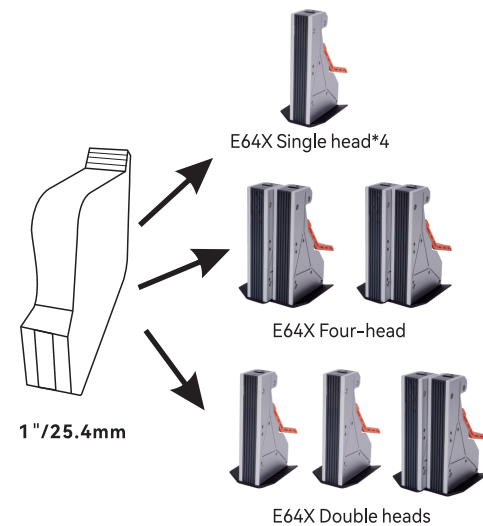

One Inch print heads



One customer one code, exclusive ASIC encryption chip



One-click for the ink cost



Intelligent interface, easy and fast



Access management, privacy protection



Universal Master Control, free combination

Product Model	E64X-1-4 (4*25.4mm seperated)/E64X -2-2(2*2*25.4 mm)/E64X-4-1(4*25.4 mm)
Printing Technology	Thermal Inkjet (TIJ)
Ink Throw Distance	2-5mm(Distance between nozzle plate and print object)
Optional Ink Cartridges	Water based (42ml): Black,Cyan,Magenta,Yellow,Green Solvent Based (42ml): Black,Cyan,Magenta,Yellow,White, Green
Operation System	Linux based
System Language	Chinese/English/German/Arabic/Spanish/Russian/Japanese/Korean/Italian/Portuguese/French/Hindi/Thai/Vietnamese/Persian/Turkish/Chinese Traditional/Indonesian/Slovenian/Serbo-Croatian/Czech/Bulgarian/Romanian/Polish/Greek/Hungarian/Ukrainian/Slovak/Burmese (Avaialbe languages vary for different regions)
Display	7" High Definition Touch Screen
Status Alarm	Green: Ready Blue: Printing Red: Alarm
Print Applications	Text, Numbers, Images, Logos, 2D codes, Barcodes, Dates, Counter, Database etc.
Printabel Material	Water based ink for porous and semi porous substrates: Paper/Corrugated box/Wooden/Fiberboard/Cotton etc. Solvent based ink for semi porous and non porous substrates: Plastic/Glass/Metal plates/Alu-foils/Cables etc.
Barcode Type	Code128, Code128B, Code39, EAN8, EAN13, UPCA, UPCE, EAN128, INT 2of5, ITF14, Code93, GS1RSS144, GS1-EAN128, GS1-Truncated, GS1RS144Limit, GS1RSS14EX, GS1-Stacked, GS1-StackedOmni, GS1-StackedEx
2D code Type	DataMatrix, QR, GridMatrix, GS1DM, PDF417
Font Type	True type fonts, Dotmatrix fonts
Resolution	X-direction DPI: 75/100/150/200/300/600/1200/2400 Y-direction DPI: 300
Print Speed	Up to 40m/minute, Speed adjustable based on the horizontal resolution
Grey level	1-10
Max. Print Size	100mm*2100mm
Max. Pixel Size	566px*12800px(Max 1000px*12800px)
External Ports	Ethernet, USB, Photocell, Encoder, Beacon, Power Adapter
Power Adapter	Input: AC100-240V Output: DC24V 4A
Working Environment	Equipment Storage Temperature: -20°C-55°C Working Temperature: 5°C-35°C (Best: 15°C-35°C) Humidity:10%-80%
Memory Size	8 Gigabytes
Net Weight	Four-head 6.7kg, Four-head combined 6kg, Separated 6.7kg