



记录你的“膜”彩生活

RECORD YOUR CHARMING LIFE

**国内销售部**

Domestic Sales Department

电话:+86 13316323899 +86 15975752898 +86 15918023328

E-mail: wannifilm@foxmail.com

**国际销售部**

Oversea Sales Department

MOB:+86 13516505823

E-mail: shayne.lui@wannifilm.com

电话: 22282163

地址: 广东省佛山市顺德区良杏路38号



# GENERAL CATALOGUE

产品目录

佛山万尼薄膜有限公司  
Foshan WanNi Film Co., Ltd

佛山万尼薄膜有限公司，创立于 2000 年，是一家专业生产高分子装饰薄膜的工厂。公司致力于为国内板饰面厂家引进国外高端膜种，用于提升装饰板表面的光泽度和平整度处理，推动板饰行业的工艺技术升级与变革。2011 年，公司推出了“WANNI 万尼”品牌，生产 UV 类别的高分子膜材。为了满足客户的需求以及推动饰面类用膜的工艺升级，2019 年，我司引入了先进的国外高端制膜技术，成立了万塑新材料有限公司，实现了从调色 - 流延 -- 涂布 / 复合 -- 覆膜 -- 成品的高标准严谨的生产工艺。

Foshan WanNi Film Co., LTD.(hereinafter referred to as WanNi), established in 2000, is a factory specializing in the production of polymer polyester film. WanNi is committed to the introduction of oversea high-end film for domestic panel manufacturers, used to improve the glossiness and flatness of the decorative board surface treatment, and promote the upgrade technology of the panel decoration industry. In 2011, WanNi established the own brand "WANNI" and produced UV polymer film. In order to meet the needs of customers and promote the upgrade technology of the panel decoration industry, in 2019, WanNi brought advanced oversea high-end film manufacturing technology into domestic market and established Wansu New Material Co., LTD., and achieved the high-standard and rigorous production process from color matching - casting - coating/composite - laminating - finished products. In the application of decoration film, WanNi has established a perfect product supporting system.

# FOUNDED IN 2000



## 公司的主营产品分为以下三大系列：

Main Products as below:

**01**  
装饰膜（PETG膜、PVC膜、PET膜和金属膜）  
Decorative film (PETG film, PVC film, PET film and Metal film)

**02**  
UV类别膜（高光高分子膜、肤感哑光高分子膜）  
UV film (High Gloss Film, Super Matt Skin Touch Film)

**03**  
饰面保护膜  
Protective film

得益于产品独特的效果和性能，公司研发的高分子高光膜、肤感膜和哑光膜销售额得以在板饰类市场占有率超过 95%，产品的质量及研发能力在市场上一直处于领先地位。

Benefited from the unique effect and performance of products, the sales of polymer high-gloss film, skin touch film and matt film developed by WanNi have been able to occupy more than 95% of the market share in the panel decoration market, and the quality of products and research and development capability have been in a leading position in the market.

95%

公司拥有国际先进水平无尘生产车间，成熟稳定的高分子薄膜生产线，配有大型绝缘复合生产设备、加工设备、精密的产品检测设施，及一整套科学的管理制度和严格的操作系统。自主研发的装饰膜具有环保性、耐刮耐磨耐高温、高稳定性等良好特性。

我司选用进口原材料和色母，每批次色差控制在 95% 以上。拥有强大的技术售后团队，专业的检测仪器包括色差校对仪器，以及光折射仪器。从生产到出货都有严谨的质检人员，确保每一批次产品。

针对海外市场，我司组建了专业的海外营销团队，并在国内外多个地区设有办事处。目前我司产品已经远销海外 20 多个国家，全球合作伙伴达 6000 家。

polymer film production line, equipped with large-scale insulation composite production facility, processing facility, accurate product testing facility, a scientific management system and rigorous operating system. The self-developed decorative film possesses environmental protection, abrasion resistance, high temperature resistance, high stability.

WanNi selects imported raw material and color masterbatches, and the color difference of each batch is controlled above 95% and has a professional technical after-sales team, testing machine including color difference calibration machine and light refraction machine. To guarantee the quality of products, professional quality inspector will follow up the proceeding of production.

For the oversea market, WanNi has established a professional overseas marketing team, and has set up offices in many regions. At present, our products have been exported to more than 20 countries, and the global partners have reached 6000.

**95%+**  
色差控制  
Color Difference Control

**20+**  
海外国家  
Countries Overseas

**6000**  
全球合作伙伴  
Global Partners

## 核心设备生产线 Core Production Line

2 条挤出线  
2 Extrusion lines.


注塑吹膜机 2 条  
2 Injection molding and blowing machines

1 条压纹线  
1 Embossing line

涂胶机 2 条  
2 Gluing machines

3 条涂布线 (其中准分子一条)  
3 Coating lines (including one excimer)

印刷生产线 2 条  
2 Printing production lines.

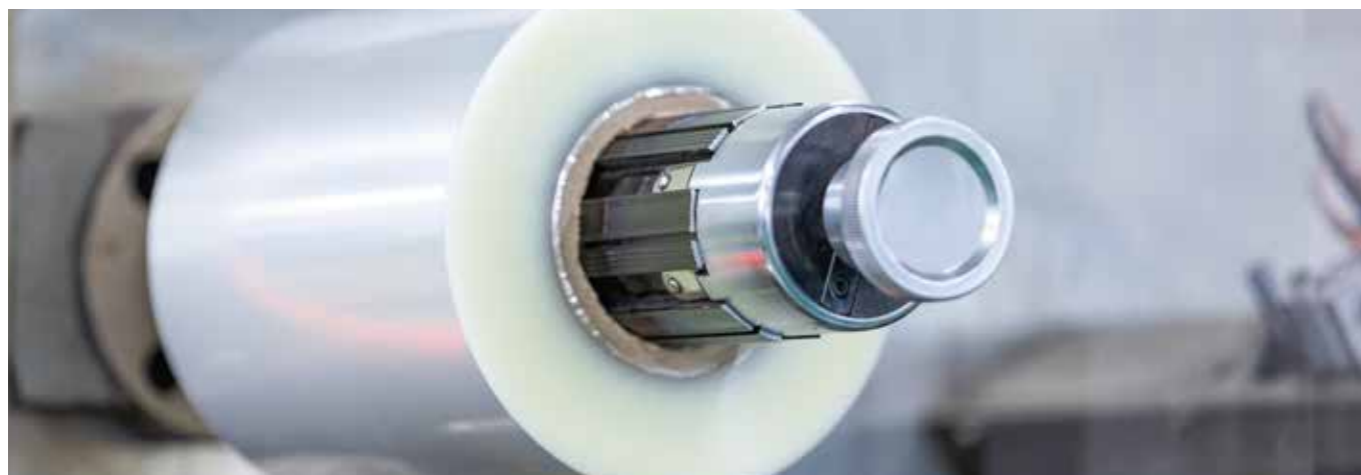

## 应用领域：各类基材表面的装饰与处理 Application: Decoration and Treatment of Various Panels



木制品 (板材类) Wood products:  
三胺板、欧松板、密度板、多层夹板、橡胶木板、胶合板、木地板  
Triamine Board, OSB Board, Density Board, Multi-layer Plywood, Rubber Board, Plywood, Wood Floor



无机板 Inorganic Panel:  
硅酸钙板、玻镁板、冰火板、外墙保温装饰一体板、水泥板、抗倍特板  
Calcium Silicate Board, Magnesium Board, HPL Board, Exterior Wall Insulation Decoration Integrated Board, Cement Board, Compact Grade Board



塑料板类 Plastic Panel:  
PVC 板、亚克力板、SPC 板、WPC 板、竹木纤维板、碳晶板、金刚板  
PVC Board, Acrylic Board, SPC Board, WPC Board, Bamboo Fiber Board, Carbon Crystal Board, Laminate Floor Coverings Board



金属板类 Metal Panel:  
铝塑板、铝蜂窝板、铝型材  
Aluminum-plastic Board, Aluminum Honeycomb Board, Aluminum Profile

保护膜更能应用于 pvc、pp 膜表面的防护

The protective film can be applied to the protection of pvc and pp film.

# D装饰膜系列 Decorative Film Series

## 2D 纯色PETG膜 2D solid color PETG film



### 规格范围/Specification

厚度0.16mm-0.5mm \*宽度 1250mm -1300mm  
Thickness 0.16mm-0.5mm \* Width 1250mm-1300mm

### 常规规格/Regular specifications

肤感厚度 0.18mm /0.25mm 亮光厚度 0.3mm  
Super matt thickness 0.18mm /0.25mm  
High Gloss thickness 0.3mm

### 应用空间/Application space

家装的柜门柜体以及全屋定制、商用空间的墙板等  
Cabinet, whole house customization and commercial wall panels, etc.

### 表处处理/Surface processing

可选肤感或高光  
Available for Super matte or High Gloss.

其中的肤感表处效果，通过我司技术的改良，更能达到手感丝滑，瞬间提升产品质感，显色度高，是目前最流行的装饰设计首选材料。  
By means of improving the technology, our products, achieve a smooth touching on the surface and more vivid, is the most popular decorative materials currently.

## 优异性能 Excellent Performance



耐高温热塑性强  
High temperature resistance and Strong thermoplastic ability.



不变形不变色，耐黄变  
No deformation and discoloration, anti-yellowing



不易刮花  
Anti-scratch



易清洁抗污  
Easy to clean and stain resistant



环保等级达到食品级  
The environmental protection grade reaches the food grade standard



表面硬度高  
High surface hardness

## PET 金属拉丝膜 PET brushed metal film

### 参数规格/Specifications

规格: 0.17mm\*1260mm  
Specification: 0.35mm \* 1260mm

耐温性: 零下70°C -170°C  
Temperature resistance: minus 70°C to 170°C



## PETG纯色漆光肤感金属膜 PETG solid color lacquer soft touch metal film

### 参数规格/Specifications

规格: 0.3mm\*1250mm  
Specification: 0.3mm\*1250mm

耐温性: 零下60°C-70°C  
Temperature resistance: minus 60°C to 70°C



## 优异性能 Excellent Performance



耐磨抗划伤  
SCRATCH RESISTANT



易清洁抗污  
EASY CLEAN



稳定高韧性  
STABLE & HIGH TENACITY



环保  
ENVIRONMENT-FRIENDLY



防水防潮  
WATER RESISTANT




耐化学性  
CHEMICAL RESISTANT

# S 繁星系列珠光装饰膜

## Stars PETG film

**PETG繁星系列** (肤感哑光/高光)  
Stars PETG film (Super Matt/ High Gloss)

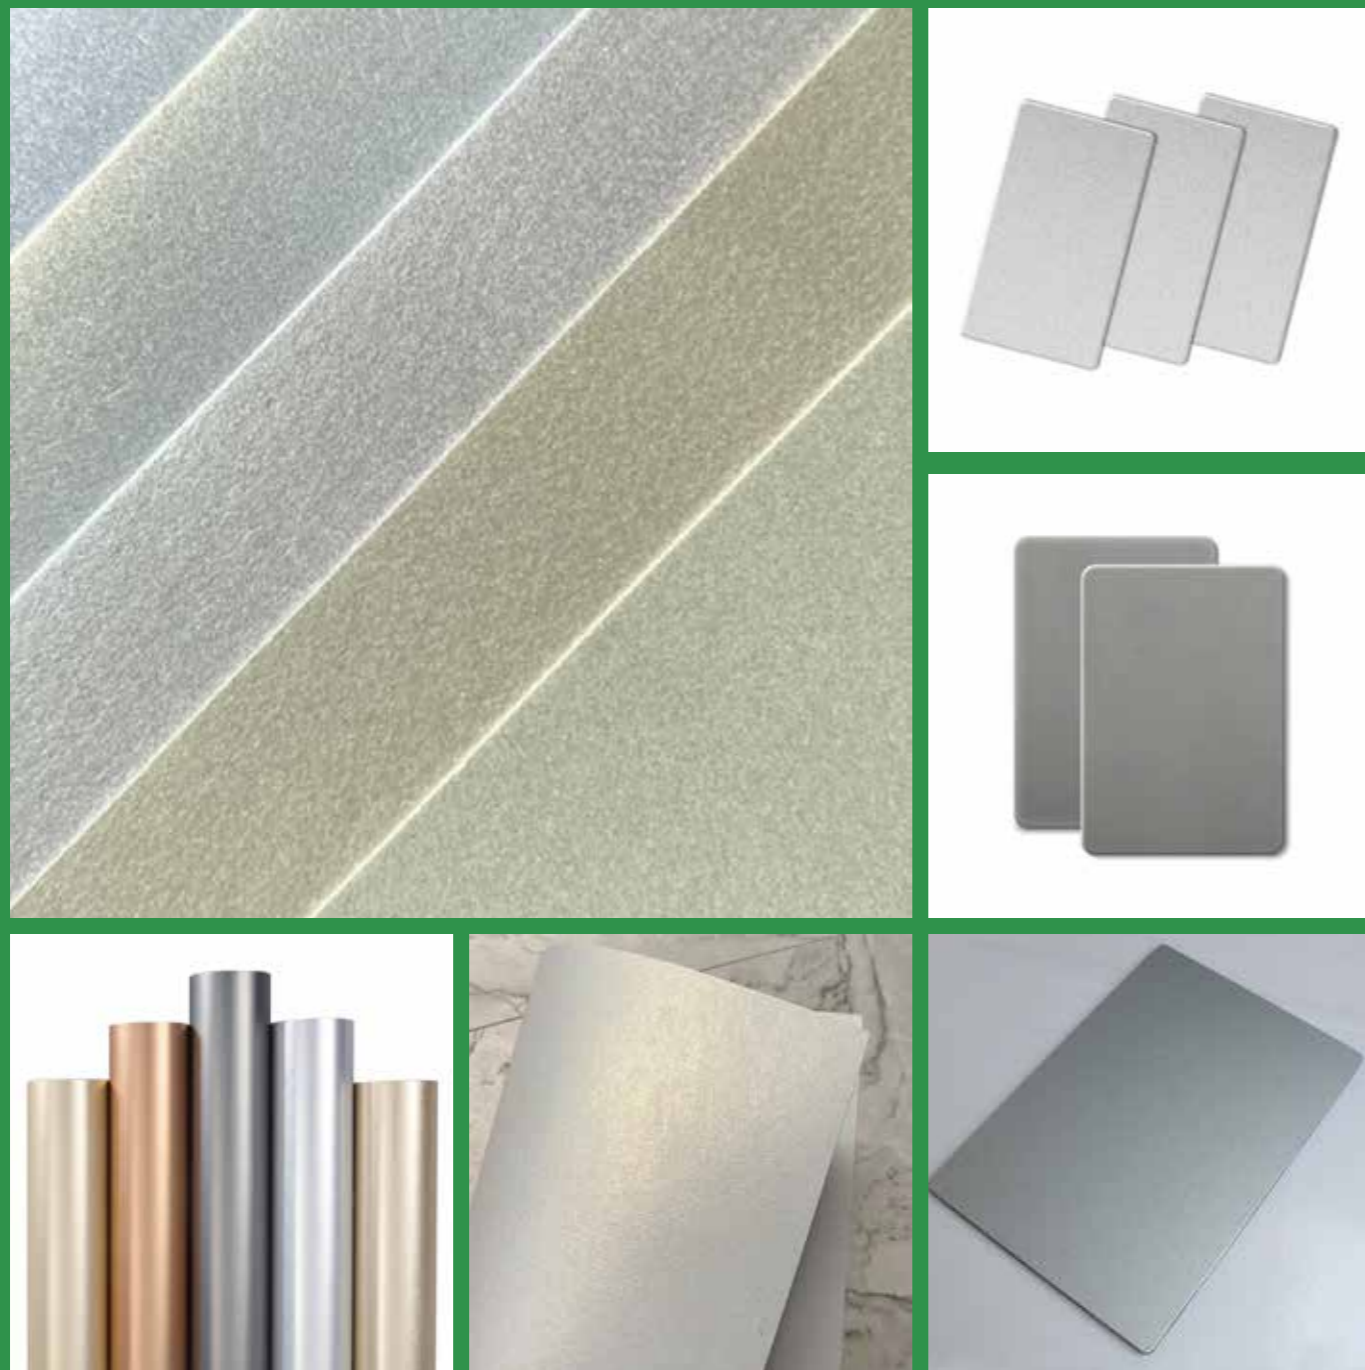

### 应用领域

Application Fields

一般用于商用空间的装饰以及家装类一橱柜、衣柜等全屋定制覆贴后的基材表面效果低调华丽，点点繁星质感。  
Generally used for decoration of commercial spaces and home decoration - whole house customization of cabinets, wardrobes, etc.

#### 应用胶水 / Application glue

PUR热熔胶/冷胶  
PUR hot melt glue/cold glue

#### 应用设备 / Application equipment

PUR平贴线、涂胶覆膜贴合设备、冷胶生产线  
PUR lamination machine, Glue coating laminating equipment, Cold glue production line

#### 参数规格 / Specifications

0.35mm\*1250mm

#### 耐高温性 / Temperature resistance

零下60°C-70°C  
Minus 60°C to 70°C

### 优异性能

Excellent Performance

独特生产配方，不会脱层  
Unique production formula, no delamination



01

易清洁抗污  
Easy to clean and stain-resistant

02



色泽持久、均匀  
Long-lasting and uniform color

03



耐化学性  
Chemical resistance

04

# D 装饰膜-石纹膜

## Decorative film - Marble PET Film



### 应用领域

Application Fields

可做单款颜色或者连纹效果，仿大理石纹肌理，用于背景墙、商用、家装等各种室内装潢。

Can be made into a single color or continuous pattern effect, imitation marble texture, used for various interior decorations such as background walls, commercial, home decoration, etc.

#### 应用胶水 / Application glue

PUR热熔胶/冷胶  
PUR hot melt glue/cold glue

#### 应用设备 / Application equipment

PUR平贴线、涂胶覆膜贴合设备、冷胶生产线  
PUR lamination machine, Glue coating laminating equipment, Cold glue production line

### PET 高光石纹膜

PET high-gloss Marble film

### PET 哑光石纹膜

PET Super matt Marble film

#### 参数规格 / Specifications

0.25mm\*1250mm及以上  
0.25mm\*1250mm or customized

#### 参数规格 / Specifications

0.25mm\*1250mm及以上  
0.25mm\*1250mm or customized

#### 耐高温性 / Temperature resistance


零下70°C-170°C  
Minus 70°C to 170°C

#### 耐高温性 / Temperature resistance

零下70°C-170°C  
Minus 70°C to 170°C

### 优异性能

Excellent Performance

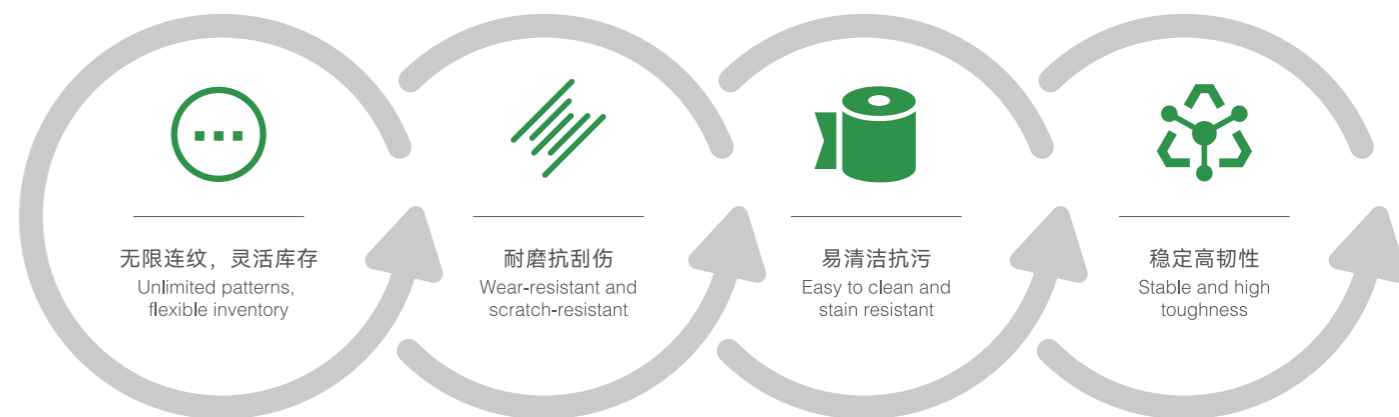

# PVC膜

PVC film



PVC膜可塑性强，品类多，一般有纯色、木纹、石纹、布纹等系列

PVC film is widely used for its various categories, generally including solid colors, wood grain, marble, fabric, and other series.

### 参数规格 / Specifications

常规厚度: 0.1mm~0.35mm  
 常规宽度: 1250mm~1420mm  
 常规收卷米数: 100m~300m

Regular thickness: 0.1mm~0.35mm  
 Regular width: 1250mm~1420mm  
 Regular rolling meters: 100m~300m

### 应用设备 / Application equipment

包覆机/平贴机/吸塑机

Wrapping machine/Lamination machine/Vacuum machine

### 应用胶水 / Application glue

PUR热熔胶

PUR hot melt glue

### 应用空间 / Application space

全屋定制，柜体柜门、墙板、吊顶等，应用范围广，适用于家装以及商用空间等

Whole house customization of application space, cabinet, wall panels, ceiling, etc., with a wide range of applications, suitable for home decoration and commercial spaces, etc.

# 魔镜膜

Mirror Film




### 参数规格 / Specifications

常规厚度: 0.25mm(黑白) / 0.3mm  
 常规宽度: 1250mm

Regular thickness: 0.25mm (black and white)/0.3mm  
 Regular width: 1250mm

# 七彩膜、马赛克膜、浮雕膜

Colorful film, Mosaic film, Ripple film

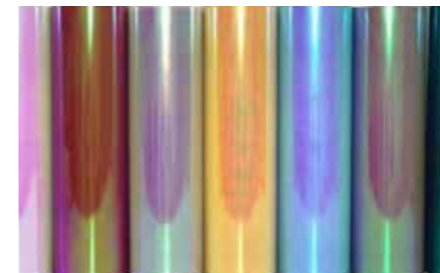

### 参数规格 / Specifications

常规厚度: 0.3mm  
 常规宽度: 1250mm

Regular thickness: 0.3mm  
 Regular width: 1250mm

### 应用设备 / Application equipment

PUR平贴机

PUR Lamination machine

### 应用胶水 / Application glue

PUR热熔胶

PUR hot melt glue



魔镜膜、七彩膜、马赛克膜、浮雕膜广泛应用于商用空间，可用于墙板、吊顶、装饰，艺术走廊等，提升整个空间扩展性，达到增大空间的视觉效果，达到美的极致。是铝板、钢板的平价替代品，可折弯，便于施工。

Mirror film, Colorful film, Mosaic film, Ripple film is widely used in commercial space, can be used for wall panels, ceiling, decoration, art corridor, etc, improve the expansion of the entire space, and achieve the visual effect of expanding the space. In addition, they are an inexpensive alternative to replace aluminum and steel, and can be bent and easier for construction.

# PET透明膜系列

## ET Transparent Film Series

### 高光膜/肤感膜

High Gloss / Super Matt

#### 参数规格 / Specifications

常规厚度: 0.18mm / 0.25mm  
常规宽度: 1250mm / 1600mm

Regular thickness: 0.18mm / 0.25mm  
Regular width: 1250mm / 1600mm

#### 应用设备 / Application equipment

UV贴合机/PUR平贴机  
UV lamination machine / PUR lamination machine

#### 应用胶水 / Application glue

UV胶水/PUR热熔胶  
UV glue / PUR hot melt glue

#### 产品优势 / Product advantages

材质通透，深度还原基材的底色与花式，提升产品表面的处理效果，减少库存压力，灵活应用。  
Owing to the transparent effect and flexible application, highly restore the original color and pattern of the base material and promote the surface treatment effect of the product.



### 花纹膜

Embossed film

#### 参数规格 / Specifications

常规厚度: 0.075mm - 0.25mm  
常规宽度: 500mm - 1600mm

Regular thickness: 0.075mm - 0.25mm  
Regular width: 500mm - 1600mm

#### 应用设备 / Application equipment

UV贴合机/PUR平贴机/UV油漆膜压机



UV Lamination machine/PUR Lamination machine/UV Inert coating machine

#### 应用胶水 / Application glue

UV胶水/PUR热熔胶

UV glue/PUR hot melt glue

过贴膜或压印方式，改变表面的纹理，提升饰面的质感。  
To change the exterior pattern and promote the texture by means of lamination or inert coating.

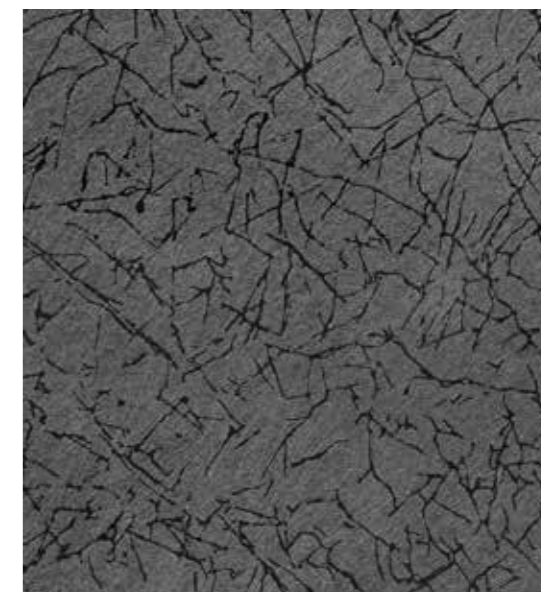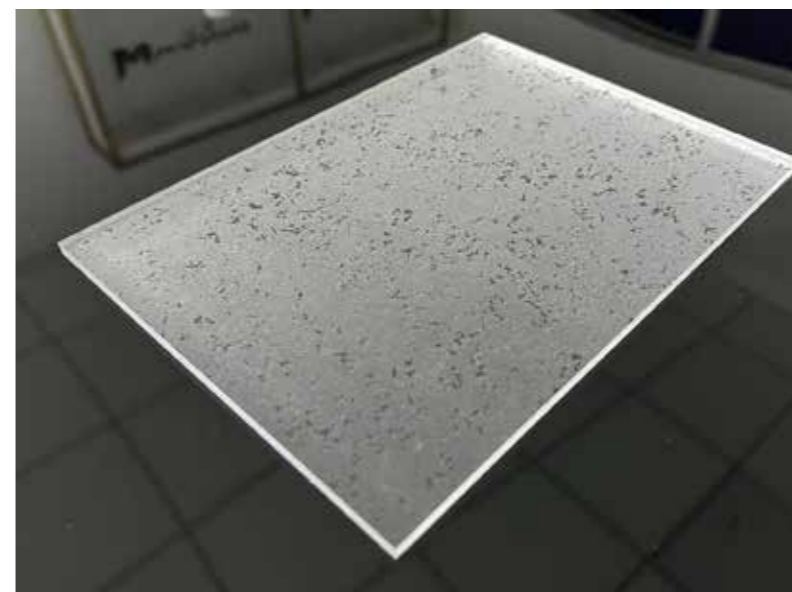

PETG装饰膜、PET透明膜系列适用设备- PUR平贴设备  
Applicable equipment for PETG decorative film and PET transparent film series - PUR Lamination machine.

# UV膜系列 UV Film Series

## 超亮高光膜 (100°光泽度)

Ultra High Gloss film (Glossiness over 100 GU)

### 规格范围 /Specification range

常规厚度: 0.025mm —0.075mm  
常规宽度: 500mm —1800mm  
Regular thickness: 0.025mm -0.075mm  
Regular width: 500mm -1800mm

### 应用设备 /Application equipment

UV油漆膜压机  
UV Inert coating machine

### 应用辅料 /Application accessories


UV油漆  
UV paint




 通透性高  
High translucency

 手感光滑清爽  
Smooth and refreshing tactile impression.

 平整度高  
High flatness

 镜面效果  
achieve a mirror-like effect

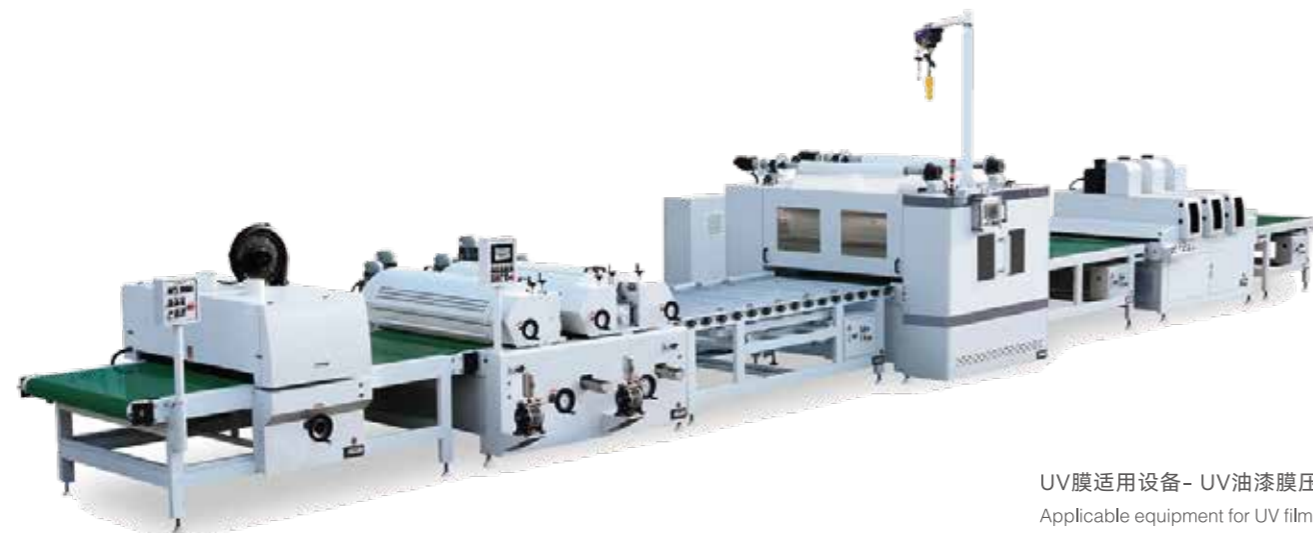

UV膜适用设备- UV油漆膜压机  
Applicable equipment for UV film series -  
UV inert coating machine.

## 极哑肤感膜 (3°光泽度)

Super Matt Soft Touch Film (Glossiness 3GU)

### 规格范围 /Specification range

常规厚度: 0.025mm —0.075mm  
常规宽度: 500mm —1800mm  
Regular thickness: 0.025mm -0.075mm  
Regular width: 500mm -1800mm

### 应用设备 /Application equipment

UV膜压油漆膜压机  
UV Inert coating machine

### 应用辅料 /Application accessories

UV油漆  
UV paint



### 产品优势 /Product advantages

 全哑肤感效果, 极哑无光  
Full ultra-matt effect, extremely  
matt without gloss

 抗污性能好, 防指纹  
Excellent stain resistance, anti-finger

 手感好, 触感柔和  
Good tactile sensation, soft touch

 丝滑表面  
Silky smooth surface

## 哑光膜 (30°光泽度 /50°光泽度)

Matt Film (Glossiness 30GU / 50GU)

### 规格范围 /Specification range

常规厚度: 0.025mm —0.075mm  
常规宽度: 500mm —1800mm  
Regular thickness: 0.025mm -0.075mm  
Regular width: 500mm -1800mm

### 应用设备 /Application equipment

UV膜压油漆膜压机  
UV Inert coating machine

### 应用辅料 /Application accessories

UV油漆  
UV paint



### 产品优势 /Product advantages

 平整度高, 无辊印  
High flatness, no roller marks

 光泽度标准化, 色泽一致均匀  
Standardized glossiness, uniform  
and consistent color

 质感细腻舒适  
Delicate and comfortable texture

 视觉效果柔和, 防止光污染  
Soft visual effect, preventing light pollution

# P 保护膜系列 Protective Film Series

## PE保护膜

PE protective film

## 无胶自粘保护膜

Glueless self-adhesive film

### 材料构成组合 /Material

基材聚乙烯+丙烯酸酯共聚物  
Basic material polyethylene + acrylate copolymer

### 规格厚度 /Specification Thickness

0.02mm-0.1mm，宽度1600mm以内，常规长度为1000m  
0.02mm-0.1mm. Width: within 1600mm. Regular length is 1000m

### 常规规格 /Regular specifications

0.04mm\*1230mm；0.05mm\*1250mm；其它规格可定制  
0.04mm\*1230mm；0.05mm\*1250mm Other specifications can be customized.

### 粘度范围 /The range of viscosity

30 - 380粘度  
30 - 380 viscosity

### 耐高温 /High temperature resistance

60°C

### 应用胶水 /Application glue

水溶胶、油胶  
Hydrosol, Factice

### 应用设备 /Application equipment

手工贴合、专用保护膜覆膜机、普通贴合机  
Manual lamination, specified protective film laminating machine, ordinary laminating machine

PE保护膜、无胶自粘保护膜适用设备-保护膜覆膜机

Applicable equipment for PETG decorative film and PET transparent film series - PUR flat laminating machine.




从吹塑到涂布胶水一体化，给客户不同粘性能的解决方案，做好的产品表面容易受到搬运、外力导致的表面磨损、以及施工造成的灰尘以及不同程度的损伤与划痕，而保护膜具备的出色性能便能很好地解决这个问题，使被贴物受到膜的保护；定制化商标以及广告语的保护膜更能使产品提高产品附加值，提升产品形象。

Integrating blow molding and glue coating, which offer different solutions for different adhesive properties to customers. The surface of finished products is easy to be abraded caused by carrying/moving and external forces, as well as dust and various degrees of damage and scratches caused by construction/building. The excellent performance of the protective film could protect the products from damage and scratch. Protective films with customized trademarks and slogans could give added value of products and promote the impression of products.

## 优异性能

Excellent Performance

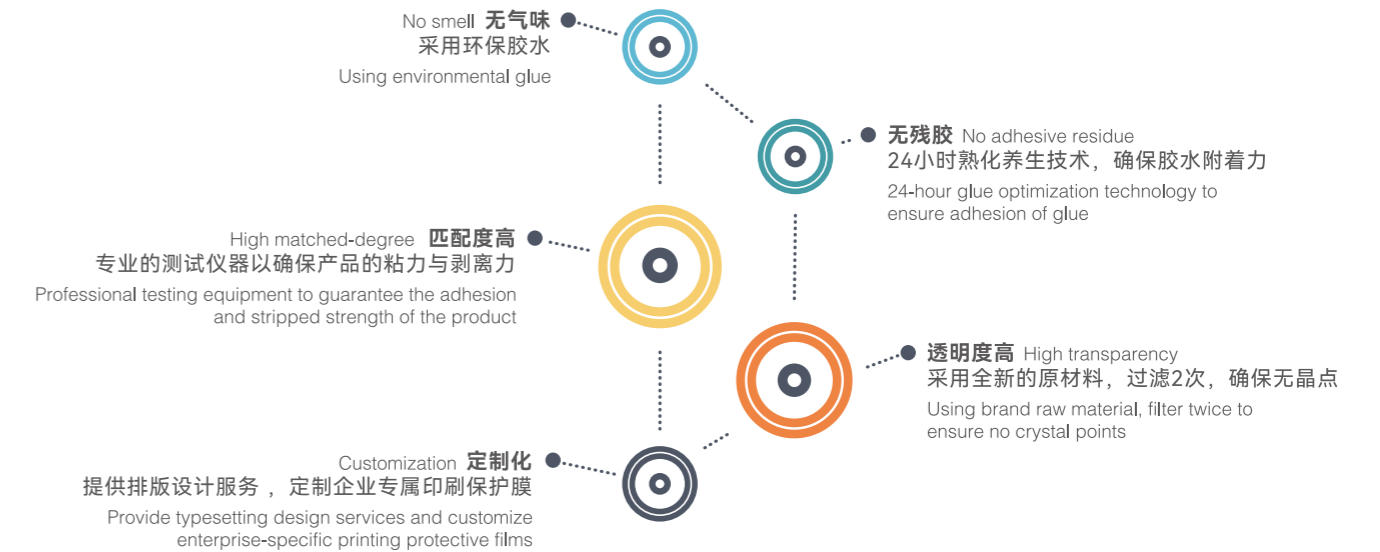

## 应用领域

Application



任何基材的UV油漆板（高光、肤感、哑光、水性、半开放以及开放木饰面等）  
UV paint boards for any basic boards (High gloss, super matt, matt, water based, semi-open and open surface of wood grain, etc.)



烤漆板  
Lacquering board



压贴的三胺面（钢压的肤感/高光）  
Surface of pressed melamine (steel pressed super matt/high gloss)



膜材类的表面（PVC膜/PETG膜/PP膜/PET膜）  
Surface of film (PVC film/PETG film/PP film/PET film)



铝板/钢板等金属板面  
Aluminium sheet/Steel sheet and other metal sheet