

Key Feature

- Immaculate and stylish appearance
- Embedded Linux system
- Video communication ,remote unlock
- Receive SOS information,intercom record,
- 10.1-inch high-definition touch screen, 1280 × 800
- Views live video of door stations and linked IP cameras



Specification

System parameters

Operation system	Embedded Linux system
Flash	256 MB
RAM	1 GB

Video parameters

Video Decode	H.264
Video Pixels	VGA, 720P
Camera	1.3 million pixels

Capacity

Linked IPC/Door Station	24/100
Intercom Logs	100
Alarm Logs	100
Messages	100

Device interfaces

Net Port	1*RJ-45
Power Port	1

Display parameters

Operation method	Capactive touch
Size	10.1-inch
Resolution	1280 × 800

Audio parameters

Audio Encoding	G.711
Speaker	Built-in loudspeaker
Microphone	-54±2dB

Network parameters

Wi-Fi	-
Protocol	TCP/IP, RTSP, RTP, UDP, DTMF, HTTP, FTP, DHCP, DNS


General

Installation	Desktop
Color	Sliver
Dimensions	336×210×34mm
Working Temperature	-10°C ~ +50°C
Storage Temperature	-40°C ~ +70°C
Protection Grade	IP30
Standby Power Consumption	≤3W
Max Power Consumption	≤8W
Power	12-24VDC (±10%)
Weight	With package: - Without package: 2.0kg

Ordering Information

model	description
EH-GU-G05-EN1	Guard Station (Sliver)

Installation

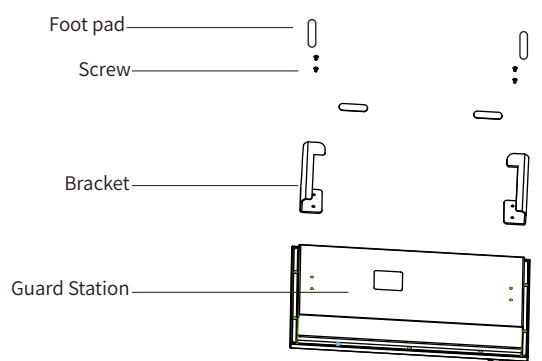

Application

- Apartment
- Office