


G3 Tubular Motor Specifications

1.1 Product Introduction

The motor is easy to install and is driven by a DC motor. It features a silent design and splash-proof design, ensuring smooth and quiet operation. The motor comes with a built-in wireless receiver and an external control interface, allowing for connection to external control systems for convenient smart control. It is suitable for various environments such as homes, hotels, educational institutions, and medical facilities.

1.2 Product Dimensions (For reference only)

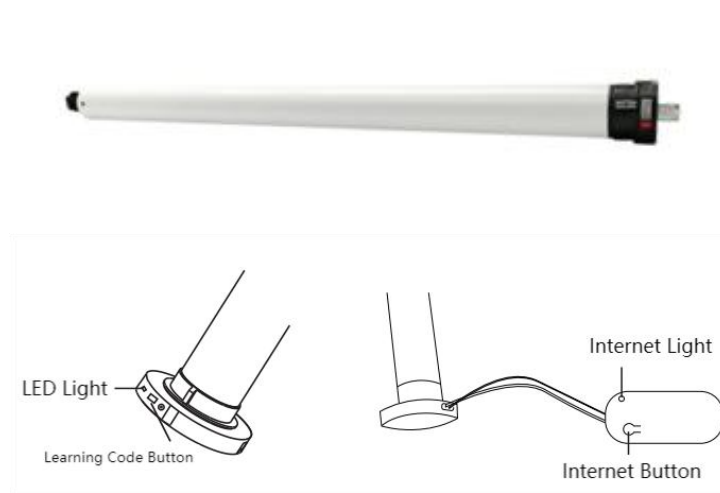

1.3 Specifications

Item	Specifications
Intelligent device interface	ZigBee
Input power	0.4A/AC100-240V
Rated torque	5.0 N.m
Noise level	<38dB
Requirements for the size of the reserved installation box	≥8cm
Maximum load	20KG
Packaging	Neuter
Inner box label	✓
Manuals (paper and electronic)	✓
3C	✓
Remote control panel	Optional
Product size	Length:533mm Diameter:36mm
Designed for	Φ47, Φ50, Φ55 Round pipes

1.4 Wiring Diagram

