

## Key Feature

- Embedded Linux system
- Alarm of equipment moving away
- Supports configuration by Web
- 2MP HD camera
- The white light fill light



## Specification

### System parameters

Operation system	Embedded Linux system
Flash	16MB
RAM	64MB

### Display parameters

Size	No
Operation Method	Mechanical keys
Resolution	No

### Video parameters

Video Encoding	H.264
Video Pixels	VGA,720P
Camera	2.0 million pixels
Angle of View	60°(H) / 40°(V)
Light Compensation	White light

### Audio parameters

Audio Encoding	G.711
Speaker	Built-in loudspeaker
Microphone	-56±2dB

### Capacity

Card Capacity	30K
Number of Contacts	-
Face Capacity	-

### Network parameters

Wifi	Not Support
Protocol	TCP/IP, UDP, HTTP, DNS, RTP

### Device interfaces

Net Port	1(RJ45)
RS485	1
Power Port	1
Relay Port	1
Lock Release Port	1
Door Magnetism Port	1

### General


Installation	Wall mounted
Color	Sliver
Dimensions	79*146*45mm
Dimensions(embedded box)	77*152*52mm
Working Temperature	-30°C ~ +60°C
Storage Temperature	-40°C ~ +70°C
IP/IK Level	IP54 / IK04
Standby Power Consumption	≤3W
Max Power Consumption	≤6W
Power	12~24V DC
Weight	-

## Ordering Information

model	description
EH-OS-M55-EN1	Wall mounted, Sun shade, IC Card

## Installation

Wall mounted

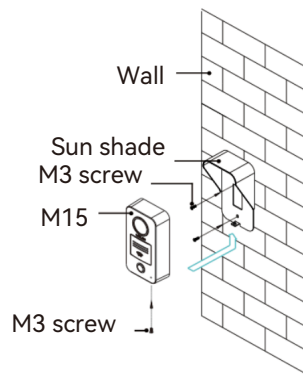

- Fix the wall mounting plate on the junction box using screws.
- Fit the device onto the wall mounting plate after wiring is completed.
- Device installation completed

## Application

- Villas