


Key Feature

- Professional design, superior in quality
- 4.3-inch colorful LCD screen, touch button
- Multi-way access feature including: IC card, Pin code
- Supports configuration via Web remotely
- Adopt tempered glass, aluminum panel, IK07 reached

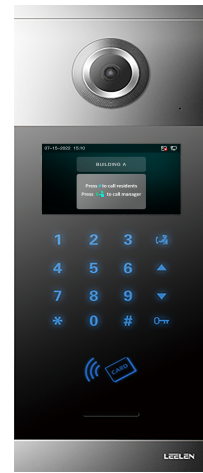

Specification

System parameters

Operation system	Embedded Linux system
Flash	16 MB
RAM	64 MB

Display parameters

Size	4.3-inch
Operation Method	Capacitive Touch
Resolution	480 × 272

Video parameters

Video Encoding	H.264
Video Pixels	VGA, 720P
Camera Pixels	2.0 million pixels
Angle of View	76°(H) / 50°(V)
Light Compensation	White Light

Audio parameters

Audio Encoding	G.711
Speaker	Built-in loudspeaker
Microphone	-56±2dB

Capacity

Card Capacity	15K
---------------	-----

Network parameters

Protocol	TCP/IP, HTTP, UDP, RTP, DNS
----------	-----------------------------

Device interfaces

Net Port	RJ45
RS485	1
Relay Outputs	1
Door magnetism Port	1
12V Out Port	Reserved
Lock Release Port	1
Fire Detector Port	1
Wiegand Port	Reserved


General

Installation	Flush mounting
Color	Silver
Dimensions	370×140×55 mm
Working Temperature	-30°C ~ +60°C
Storage Temperature	-40°C ~ +70°C
Power	DC12 ~ 24V±10%
IP/IK Level	IP54 / IK07
Standby Power Consumption	2W
Max Power Consumption	3W

Ordering Information

Model	Description
EH-OS-M19-ENL01	M19 Outdoor Station (Silver)

Installation

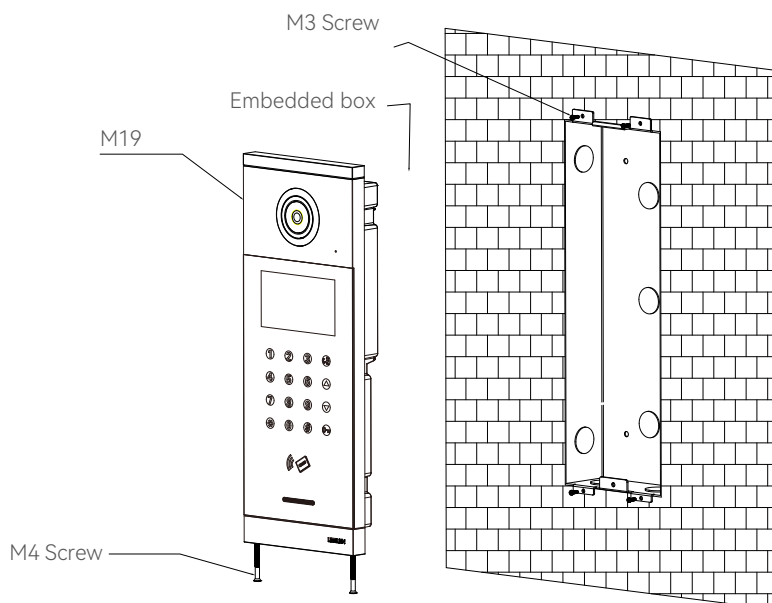

- Trepanning a hole (large than the embedded box size and no more than the equipment size)
- Insert the embedded box in the hole, and fix it with the cement slurry.
- Connect wires, fix the outdoor station on the pre-embedded box and locked it with screws, Then install finished.

Application

- Villas
- Apartment complexes