

## Key Feature

- Concise and stylish appearance
- Built-in Android 5.1
- 7-inch capacitive touch screen, 1024 × 600
- Standard PoE
- Enables the ability to remotely control the door/gate
- Friendly user experience interface, only need to realize the main functions within 3 steps
- Allow RTSP protocol third-party interface connection



## Specification

### System parameters

Operation system	Android 5.1
Flash	8GB
RAM	2GB

### Display parameters

Size	7-inch
Operation Method	Capacitive Touch
Resolution	1024 × 600

### Video parameters

Video Encoding	H.264
Video Pixels	VGA, 720P
Camera Pixels	2.0 million pixels
Angle of View	110°(H) / 60°(V)
Low Illumination	Auto IR light

### Audio parameters

Audio Encoding	G.711
Speaker	Built-in loudspeaker
Microphone	-56±2dB

### Capacity

Card Capacity	10K
Countof Contacts	5K

### Network parameters

Protocol	TCP/IP, RTSP, SIP, UDP, DTMF, HTTP, FTP, DHCP, DNS
----------	--

### Device interfaces

Net Port	RJ45
RS485	1
Relay Outputs	2
Wiegand Port	1
Signal Output	2 (Optional)
Lock Release Port	1
Door Magnetism Ports	1


### General

Installation	Wall mounting
Color	Grey
Dimensions	380*160*29mm
Working Temperature	-20°C ~ +55°C
Storage Temperature	-40°C ~ +70°C
PoE	Standard PoE (802.3af)
IP/IK Level	IP54 / IK07
Standby Power Consumption	≤5W
Max Power Consumption	≤9W
Power	12V DC
Weight	With package: 2kg Without package: 1.43kg

## Ordering Information

Model	Description
EHS-OS-M21-ENA01	Outdoor station

## Installation

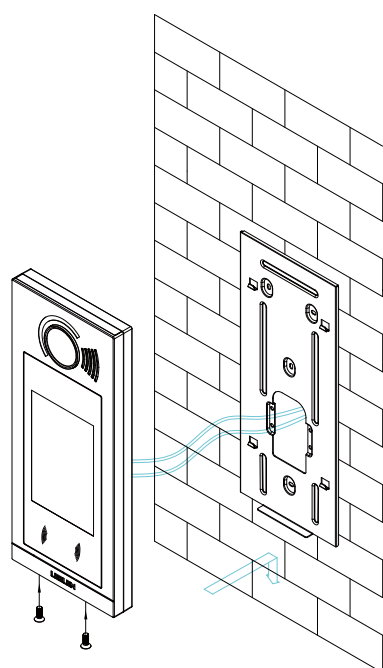

- Fix the wall mounting plate on the junction box using screws.
- Fit the device onto the wall mounting plate after wiring is completed.
- Device installation completed

## Application

- Villas
- Apartment complexes
- Home automation systems