

## Key Feature

- Concise and stylish appearance
- 7-inch capacitive touch screen, 1024 × 600
- Tempered glass panel, made of aluminum alloy
- Dual 2MP HD cameras with IR support
- Wide dynamic algorithm is applied to improve the image processing effect in backlight and backlight environment
- Supports configuration via Web remotely



## Specification

### System parameters

Operation system	Embedded Linux system
Flash	8 GB
RAM	1 GB

### Display parameters

Size	7-inch
Operation Method	Capacitive Touch
Resolution	1024 × 600

### Video parameters

Video Encoding	H.264
Video Pixels	VGA, 720P
Camera	Dual Camera 2.0 million pixels
Angle of View	98°(H) / 52°(V)
Light Compensation	White light

### Audio parameters

Audio Encoding	G.711
Speaker	Built-in loudspeaker
Microphone	-56±2dB

### Capacity

Card Capacity	50K
Number of Contacts	2K
Face Capacity	20K

### Network parameters

Wifi	Not Support
Protocol	TCP/IP, UDP, HTTP, DNS, RTP

### Device interfaces

Net Port	RJ45
RS485	1
Relay Output	1
Fire Detect Port	1
12V Out Port	Reserved
Lock Release Port	1
Door Status Port	1


### General

Installation	Wall mounting
Color	Black
Dimensions	120×246×29mm
Working Temperature	-30°C ~ +60°C
Storage Temperature	-40°C ~ +70°C
IP/IK Level	IP65 / IK07
Power	12~24V DC
Weight	Without package: 810 g
Standby Power Consumption	3.5W
Max Power Consumption	7.5W

## Ordering Information

model	description
EH-OS-M28-ENL01	M28 Outdoor Station (Black)

## Installation

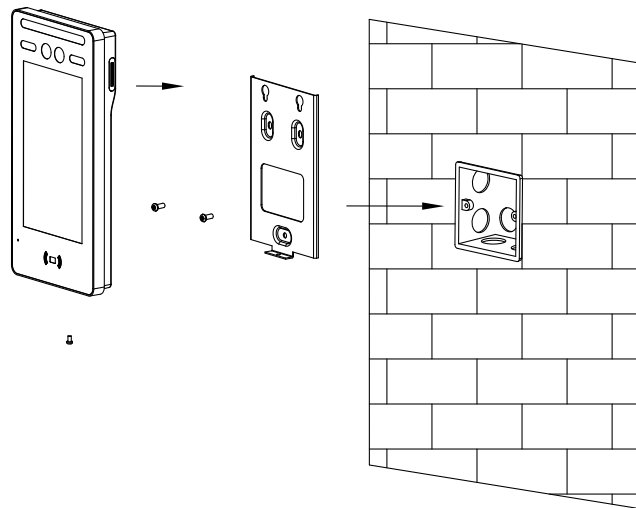

- Fix the wall mounting plate on the junction box using screws.
- Fit the device onto the wall mounting plate after wiring is completed.
- Device installation completed

## Application

- Villas
- Apartment complexes