

Key Feature

- Minimalist design, Ultra-thin body
- 7-inch capacitive touch screen, 600 × 1024
- Supports configuration via Web remotely
- Dual 2MP HD cameras with IR support
- Liveness detection
- Wide dynamic algorithm is applied to improve the image processing effect in backlight and backlight environment



Specification

System parameters

Operation system	Embedded Linux system
Flash	8 GB
RAM	1 GB

Display parameters

Size	7-inch
Operation Method	Capacitive Touch
Resolution	1024 × 600

Video parameters

Video Encoding	H.264
Video Pixels	VGA, 720P
Camera	Dual Camera 2.0 million pixels
Angle of View	86°(H) / 46°(V)
Light Compensation	White light

Audio parameters

Audio Encoding	G.711
Speaker	Built-in loudspeaker
Microphone	-56±2dB

Capacity

Card Capacity	50K
Number of Contacts	2K
Face Capacity	20K

Network parameters

Wifi	Not Support
Protocol	TCP/IP, UDP, HTTP, DNS, RTP

Device interfaces

Net Port	RJ45
RS485	1
Relay Output	1
Fire Detect Port	1
12V Out Port	Reserved
Lock Release Port	1
Door Status Port	1


General

Installation	Flush mounting
Color	Silver
Dimensions	162*378*35.5mm
Working Temperature	-30°C ~ +60°C
Storage Temperature	-40°C ~ +70°C
IP/IK Level	IP65 / IK07
Standby Power Consumption	3.5W
Max Power Consumption	7.5W
Power	12~24V DC
Weight	Without package: 1740 g With package: 1970 g

Ordering Information

model	description
EH-OS-M33-ENL01	M33 Outdoor Station (Silver)

Installation

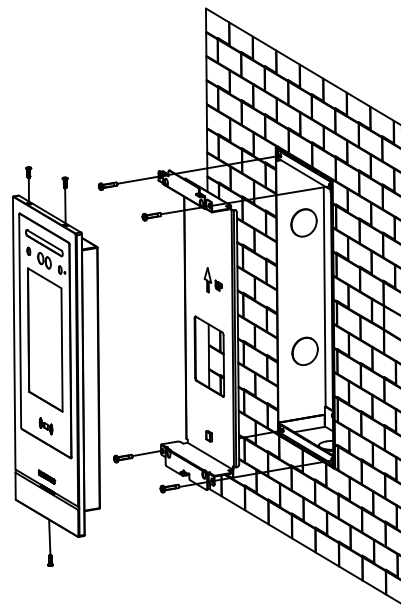

- Trepanning a hole (larger than the embedded box size and no more than the equipment size).
- Insert the embedded box in the hole, and fix it with the cement slurry.
- Connect wires, fix the outdoor station on the pre-embedded box and lock it with screws, then install finished.

Application

- Villas
- Apartment complexes