
T2 Downlight Specifications


1.1 Product Introduction

No extra wiring needed—control each light separately and enjoy smooth, natural lighting changes. Fits any home and creates a cozy, modern atmosphere for a smarter way of living.

1.2 Product Dimensions (For reference only)










1.3 Specifications

Item	Specifications
Intelligent device interface	ZigBee
Input power	0.08A/AC220-240V
Power consumption	10W
Operating temperature	-20 - 45°C
Operating humidity	≤85%
IP level	IP20
Product material	ADC12
CRI	RA≥90
Beam angle	50°
SDCM	<3
Luminous flux	550LM@2700K
	700LM@4000K
	700LM@6500K
Luminous efficacy	55LM@2700K
	70LM@4000K
	70LM@6500K
Color temperature	2700-6500К
Color grade	Level 3
Installation	Recessed, Cutout size: Φ75mm
Product size	Ф85*H70mm
N.W.	166g

1.4 Wiring Diagram

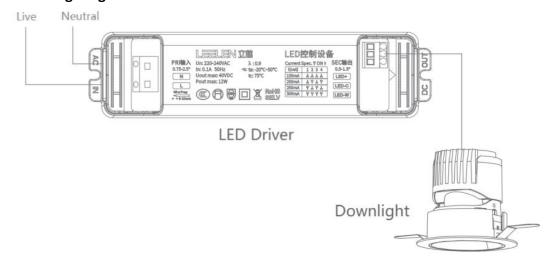


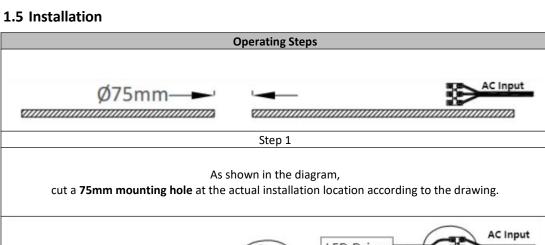

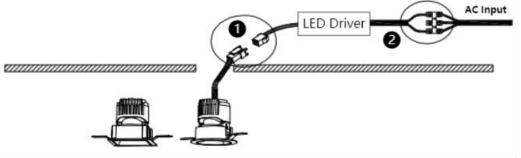


Step 2

As shown in the diagram, correctly connect the **two** wiring points of the T2 downlight.

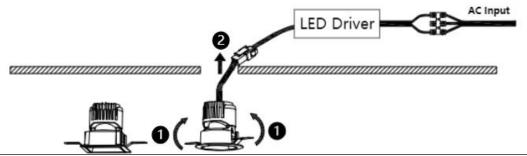

Step 3

Press the fixings (①) on both ends of the T2 downlight upwards, then insert it into the pre-cut hole (②) in the ceiling.

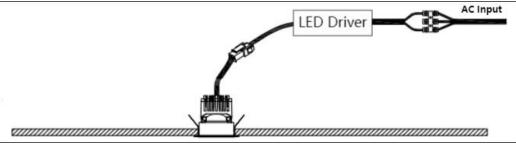

Step 4

At the end, power on the downlight.