


Key Feature

- Immaculate and stylish appearance
- Embedded Linux system
- 8-channel wired alarm zone
- Remote cloud intercom and unlocking via the APP
- New UI: support light mode / dark mode
- 7-inch high-definition touch screen, 1024 × 600
- Views live video of door stations and linked IP cameras

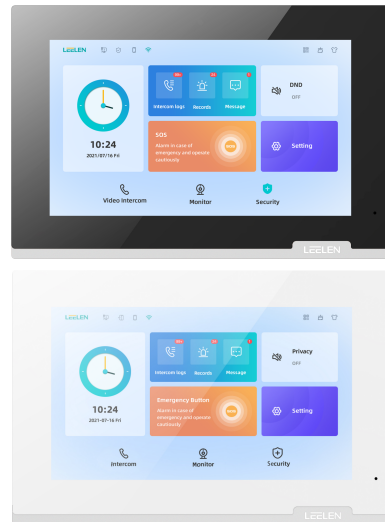

Specification

System parameters

Operation system	Embedded Linux system
Flash	128 MB
RAM	64 MB

Display parameters

Operation method	Capacitive touch
Size	7-inch
Resolution	1024 × 600

Video parameters

Video Decode	H.264, H.265
Video Pixels	VGA, 720P

Audio parameters

Audio Encoding	G.711
Speaker	Built-in loudspeaker
Microphone	-54±2dB

Capacity

Linked IPC/Door Station	6/6
Intercom Logs	100
Alarm Logs	100
Messages	100

Network parameters

Wi-Fi	Support (Optional)
Protocol	TCP/IP, RTSP, RTP, UDP, DTMF, HTTP, FTP, DHCP, DNS

Device interfaces

Alarm Port	8
Net Port	RJ-45
RS485	1
Bell In	1
Power Port	1


General

Installation	Wall mounting
Color	Black/White
Dimensions	194×130×15.9mm
Working Temperature	-10°C ~ +50°C
Storage Temperature	-40°C ~ +70°C
Protection Grade	IP30
Standby Power Consumption	≤2.2W
Max Power Consumption	≤4.5W
Power	12-24VDC (±10%)
Weight	With package: 400 g Without package: 340 g

Ordering Information

model	descrip-
EH-IS-V50-ENL01	Indoor Monitor (Black)
EH-IS-V50-ENL02	Indoor Monitor (White)
EH-IS-V50-ENL03	Wi-Fi Indoor Monitor (Black)
EH-IS-V50-ENL04	Wi-Fi Indoor Monitor (White)

Installation



Application

- Villas
- Apartment complexes
- Home automation systems