

Bently Nevada 170180-01-00

FieldMonitor External Transducer I/O Module



© Artisan Technology Group

\$595.00

In Stock

Qty Available: 1

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/85034-2>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

170180 FieldMonitor™ External Transducer I/O Module

Bently Nevada™ Asset Condition Monitoring


Description

An external transducer I/O module is used to connect the following transducer types to their respective 2-channel monitoring module:

- Proximity probes using external Proximitor® sensors (see note)
- All supported acceleration and velocity transducers

Each external transducer I/O module occupies one slot in a FieldMonitor terminal base, and can accommodate up to two transducer inputs.

Note: For proximity probes without external Proximitor sensors, refer to specification and ordering information sheets 141481-01 and 141482-01.

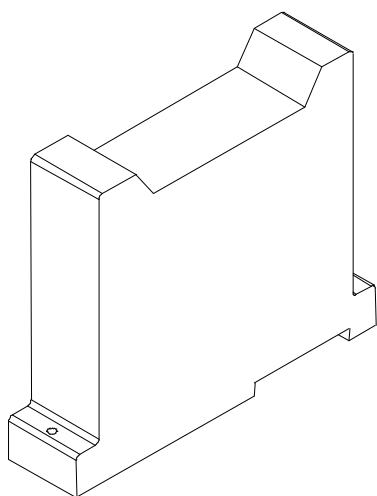

Specifications and Ordering Information
Part Number 141480-01
Rev. E (11/08)

Specifications

Signal Inputs

170180-01-XX:

Channel A

One Proximitor

or

Accelerometer with -24 Vdc
Supply

Channel B

One Proximitor

or

Accelerometer with -24 Vdc
Supply

170180-02-XX:

Channel A

One 2-wire Velocity Transducer

Channel B

One 2-wire Velocity Transducer

170180-03-XX:

Channel A

One Velomitor® Velocity
Transducer

Channel B

One Velomitor Velocity
Transducer

170180-04-XX:

Channel A

One Velomitor Velocity
Transducer

Channel B

One 2-wire Velocity Transducer

170180-05-XX:

Channel A

One Proximitor sensor with -18
Vdc supply

Channel B

One Proximitor sensor with -18
Vdc supply

Physical

Operating Temperature:

-34°C to +85°C (-30°F to +185°F)

Storage Temperature:

-40°C to +85°C (-40°F to +185°F)

Relative Humidity:

100% condensing nonsubmerged
from +7°C to +85°C (+45°F to
+185°F) when the connector is
protected.

Weight :

277g (0.61 lb) typical

Proximitor Sensor/ Accelerometer Interface Module

Input Signal Voltage Range:

0 to -Vt

Output Voltage Range:

0 to -Vt

Frequency Response:

-5% at >25 kHz

Current draw (without transducer):

2.0 mA maximum

Current Limit Setpoint:

33.6 mA min, 37.6 mA max at
25°C (77°F)

Specifications and Ordering Information
Part Number 141480-01
Rev. E (11/08)

2-Wire Velocity Transducer Interface Module**Input Signal****Voltage Range:**

0 to -Vt

**Output Voltage
Range:**

0 to -Vt

**Frequency
Response:**

-5% at >25 K Hz

**Input
Impedance:** $9.98 \pm 0.02 \text{ K}\Omega$ **Current draw
(without
transducer):**

2.0 mA maximum

Velomitor Piezo-Velocity Transducer**Input Signal****Voltage Range:**

0 to -Vt

**Output Voltage
Range:**

0 to -Vt

**Transducer
Nominal Bias
Voltage:**

-12 Vdc

**Transducer
Regulated
Current:**

3.00 to 4.10 mA

**Frequency
Response:**

-5% at >25 K Hz

**Current draw
(without
transducer):**

1.5 mA maximum

-18 V Proximitor Interface Module**Input Signal****Voltage Range:**

0 to -Vt

**Output Voltage
Range:**

0 to -Vt

**Transducer
Supply Voltage:**

-17.75 to -18.24 Vdc

**Frequency
Response:**

-5% at >25 kHz

**Current draw
(without
transducer):**

2.0 mA maximum

Hazardous Area Approvals

-00 Approvals Ordering Option


North America

Ex nA IIC T4
Class I, Zone 2
Class I, Div 2
Groups A, B, C, D
T4 @ -30°C = Ta = +70°C
per dwg 139255

*Certification
Number*

CSA 1166985

European/ATEX

 II 3G EEx nA [L] IIC T4
LCIE 00ATEX6016X
T4 @ -30°C = Ta = +70°C

Brazil

Br-Ex nA [nL] IIC T4
MC, AEX-8304-X
T4 @ -30°C = Ta = +70°C

-05 Approvals Ordering Option


North America

Ex nA [ia] IIC T4
Class I, Zone 2(0)
Class I, Div 2
Groups A, B, C, D
T4 @ -30°C = Ta = +70°C
per dwg 141265

*Certification
Number*

CSA 1166985

European/ATEX

 II 1/3 G EEx nA[ia] ia IIC T4
LCIE 00ATEX6017X
T4 @ -30°C = Ta = +70°C

Ordering Information

Transducer I/O Module

170180-XX-XX

A: I/O Module Type


- 01** Dual Proximitors/
Accelerometer I/O Module
- 02** Dual Velocity I/O Module
- 03** Dual Velomitor I/O Module
- 04** Velomitor A and Velocity B I/O
Module
- 05** Dual -18V Proximitors I/O
Module

B: Hazardous Area Approval

Use the **05** option in the 1701/06 Isolator Terminal Base

- 00** Division 2/Zone 2
- 05** Division 2/Zone 2 for Monitor
Division 1, Zone 0/1 for
Transducers

Dimensional Drawing

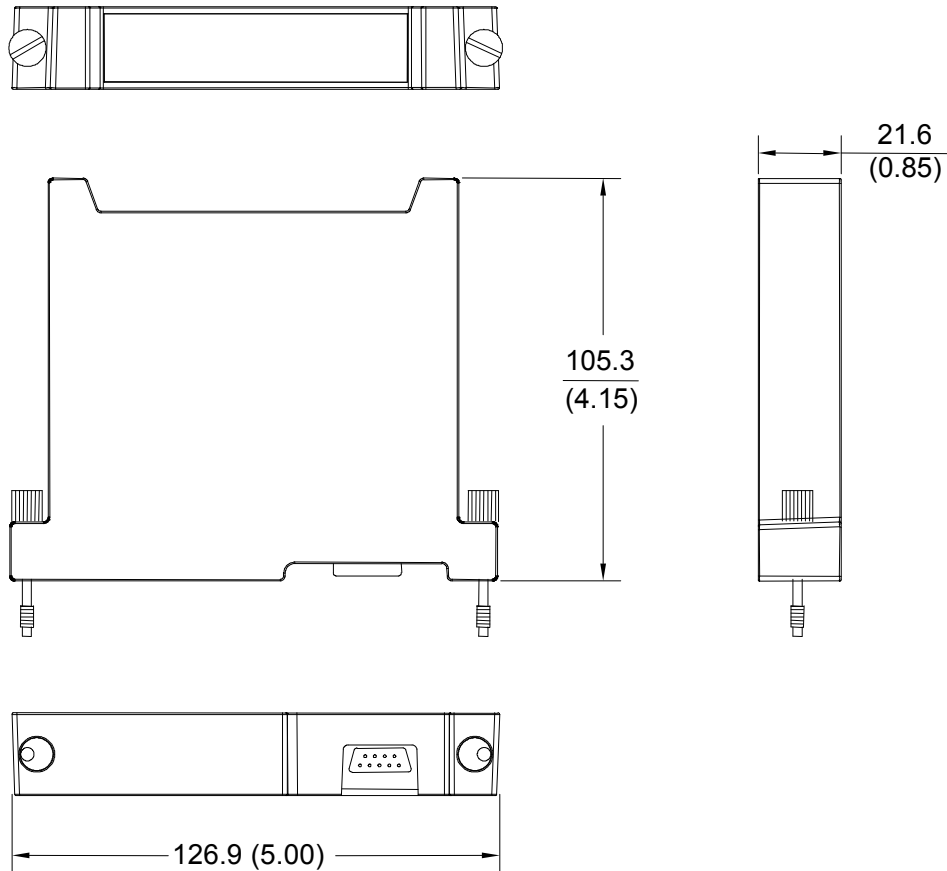

Dimensions are in millimetres (inches)

Bently Nevada, FieldMonitor, Proximitor, and Velomitor are trademarks of General Electric Company.

Modbus is a registered mark of Schneider Electric.

ControlNet™ is a trademark of ControlNet International.

DeviceNet™ is a trademark of the Open DeviceNet Vendor Association (ODVA).

Profibus™ is a trademark of the PROFIBUS User Organization.

Copyright 1999. Bently Nevada LLC.
1631 Bently Parkway South, Minden, Nevada USA 89423
Phone: 775.782.3611 Fax: 775.215.2873
www.ge-energy.com/bently
All rights reserved.

Specifications and Ordering Information
Part Number 141480-01
Rev. E (11/08)

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

