

GE Fanuc IC697PWR710

PLC Power Supply



\$495.00

In Stock

Qty Available: 2

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/65252-4>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

GFK-0588E
August 1997

12 MHz Expandable, Floating Point Central Processing Unit

Features


- Supports floating point calculations.
- Single slot CPU.
- 2K inputs and outputs (any mix).
- Up to 8K analog I/O.
- 0.4 microseconds per boolean function.
- 12 MHz, 80C186 microprocessor.
- Supports IC660/IC661 and IC697I/O.
- Programmed by MS-DOS® or Windows based software products running on Windows® 95 or Windows NT® over Ethernet TCP/IP or through the SNP port.
- Supports up to 512 Kbytes of battery-backed expansion memory in the same slot.
- Configurable data and program memory.
- Battery-backed calendar clock.
- Three position operation mode switch.
- Password controlled access.
- Three status LEDs.
- Software configuration (No DIP switches or jumpers to set).
- Reference information inside front door.

Functions

The CPU 772 is a single slot PLC CPU which allows floating point calculations. The CPU 772 is programmed and configured by MS-DOS or Windows based programming software to perform real time control of machines, processes and material handling systems. The CPU 772 communicates with I/O and smart option modules over the rack mounted backplane (IC697CHS750, 782, 783, 790, 791) by way of the VME C.1 Standard format.

Supported option modules include IC697 LAN interface modules, several Coprocessor modules, Bus Controller for IC660/IC661 I/O products, Communications modules, I/O Link Interface, and all of the IC697 family of discrete and analog I/O modules (see the applicable

Programmable Controller Installation Manual for more information on supported modules).

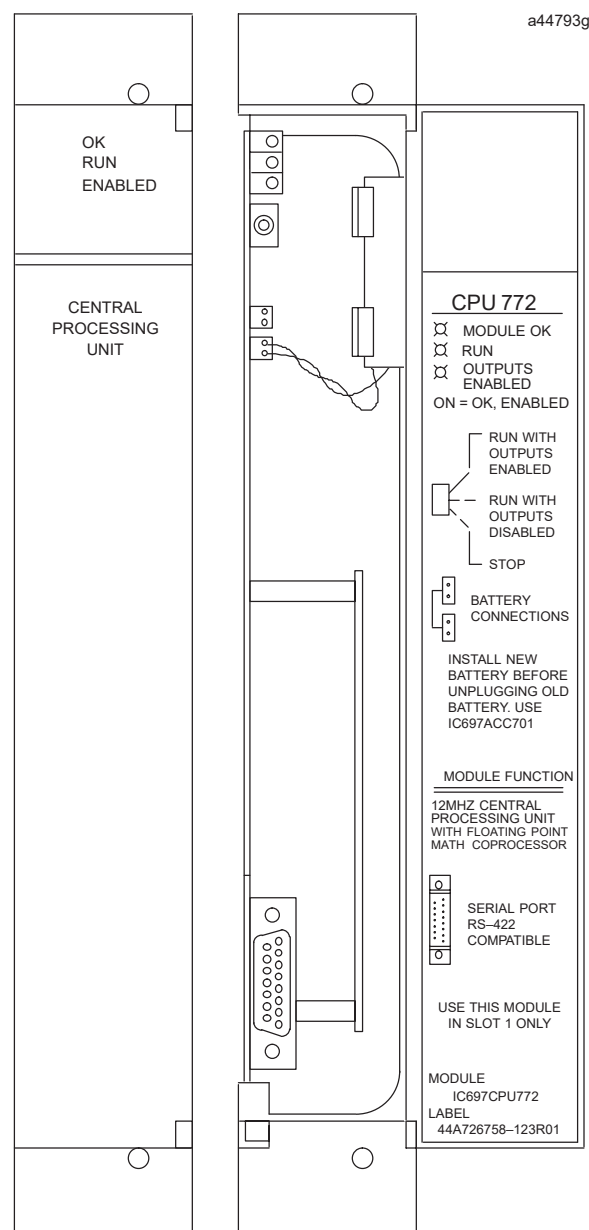


® MS-DOS, Windows, Windows 95, and Windows NT are registered trademarks of Microsoft Corporation.

GFK-0588E
August 1997

12 MHz Expandable, Floating Point Central Processing Unit

Program and data memory for the CPU 772 is available by attachment of an expansion memory board with either 64, 128, 256 or 512 Kbytes of battery-backed CMOS RAM.

Operation of this module may be controlled by the three position switch or remotely by an attached programmer and programming software. CPU status is indicated by three green LEDs on the front of the module.

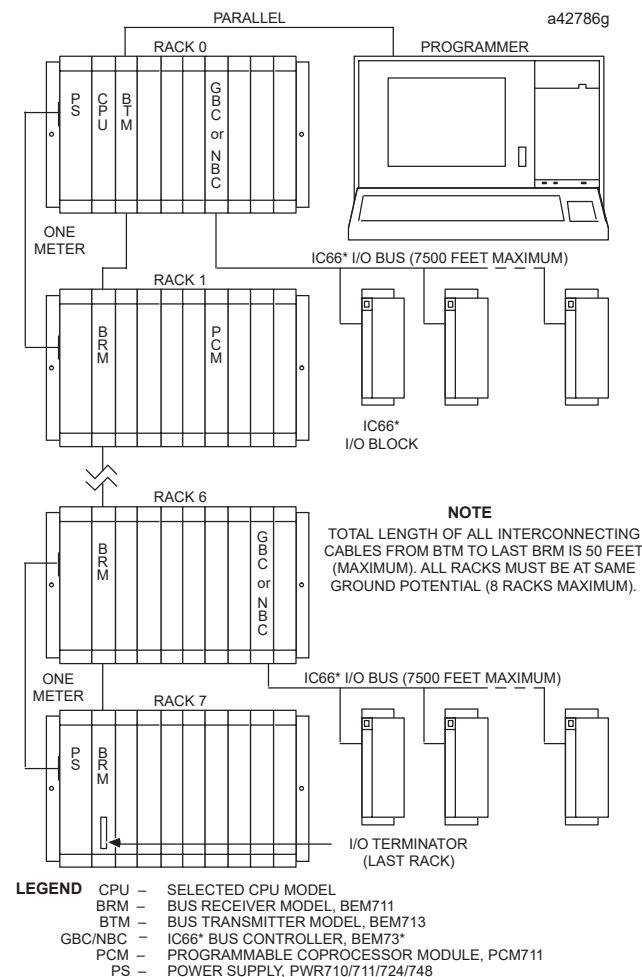

12 MHz Expandable, Floating Point Central Processing Unit

GFK-0588E
August 1997

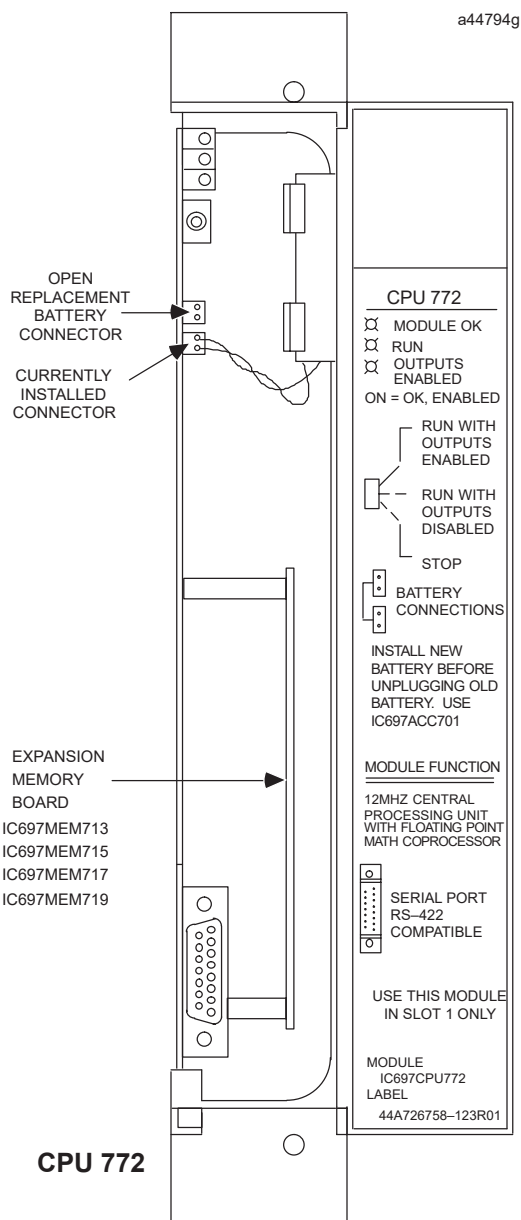


Figure 2. CPU 772 - Location of Major Features

Programmer Connection, Parallel

For a parallel interface (MS-DOS programmer only) the programmer is connected to the top port connector on the Bus Transmitter Module (IC697BEM713) as shown in Figure 1. Consult Reference 2 for a description of programming functions.

Serial Port

The 15-pin D-connector provides the connection to an RS-485 compatible serial port as shown in Figure 3. This port provides a serial connection to a Standard Serial COM port, or to a Work Station Interface board installed in the programming computer.

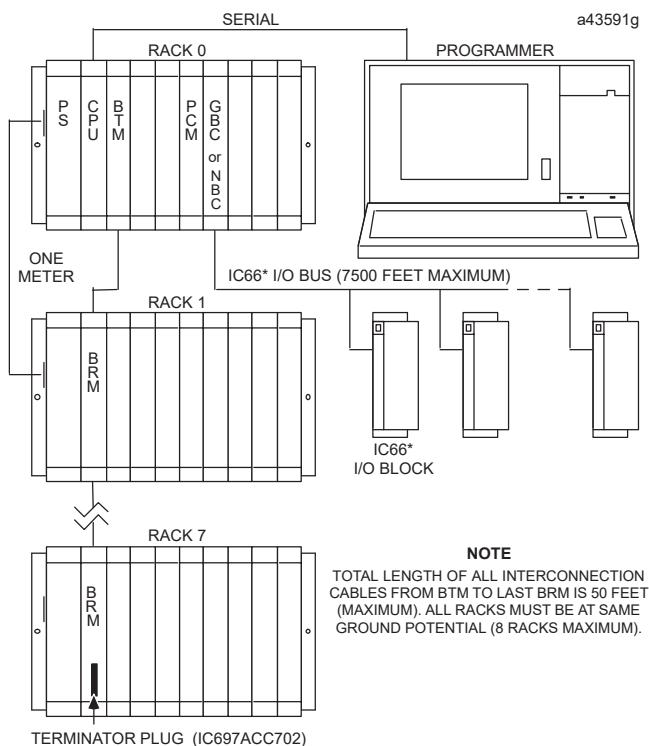


Figure 3. System Configuration, Serial Connection to Programmer

Programmer Connection, Ethernet TCP/IP

Connecting your programmer via an Ethernet TCP/IP network requires installation of an Ethernet Interface module in the PLC. This can be either the Ethernet Controller, IC697CMM741, or Ethernet Interface (Type 2), IC697CMM742. Before connecting your programmer and PLC to the Ethernet TCP/IP network you must set the IP address in the Ethernet Interface. After setting the IP address, connect the PLC and the programmer running Windows software to the Ethernet Interface. For more detailed information on Ethernet TCP/IP, refer to the *TCP/IP Ethernet Communications (Type 2) User's Manual*, and the Windows programming manual, GFK-1295.

GFK-0588E
August 1997

12 MHz Expandable, Floating Point Central Processing Unit

Configuration

The IC697 CPU and I/O system is configured with MS-DOS or Windows based programming software. There are no DIP switches or jumpers used to configure the system. The CPU verifies the actual module and rack configuration at power-up and periodically during operation. The actual configuration must be the same as the programmed configuration. Deviations are reported to the CPU alarm processor function for configured fault response. Consult Reference 1 for a description of configuration functions.

Batteries

A lithium battery (IC697ACC701) is installed as shown in Figure 2. This battery maintains program and data memory when power is removed and operates the calendar clock. Be sure to install the new battery be-

fore removing the old battery. If during power-up diagnostics a low battery is detected the Module OK LED (top) will not stay on. Specific indication of a low battery state is detailed in Reference 3.

Removing a Module

The following instructions should be followed when removing a module from its slot in a rack.

- Grasp the board firmly at the top and bottom of the board cover with your thumbs on the front of the cover and your fingers on the plastic clips on the back of the cover.
- Squeeze the rack clips on the back of the cover with your fingers to disengage the clip from the rack rail and pull the board firmly to remove it from the backplane connector.
- Slide the board along the card guide and remove it from the rack.

Table 1. Specifications for IC697CPU772 †

Battery ShelfLife	10 years at 20° C (68° F)
Memory Retention	6 months nominal without applied power
Current required from 5V Bus	1.2 Amps (includes expansion memory)
Time of Day Clock (internal timing) Accuracy	± 3.5 seconds per day
Elapsed Time Clock	± .01% maximum
Serial Port	RS422 / 485 compatible, Programmer Serial Attachment
VME	System designed to support the VME standard C.1

† Refer to GFK-0867B, or later for product standards and general specifications.

Table 2. References

Reference	Title
1	Programming Software User's Manual
2	Programmable Controller Reference Manual
3	Programmable Controller Installation Manual

Table 3. Ordering Information

Description	Catalog Number
CPU 772, 16 MHz, Expandable, Floating Point	IC697CPU772
64 Kbyte, CMOS Expansion Memory	IC697MEM713
128 Kbyte, CMOS Expansion Memory	IC697MEM715
256 Kbyte, CMOS Expansion Memory	IC697MEM717
512 Kbyte, CMOS Expansion Memory	IC697MEM719
Lithium Battery	IC697ACC701

Note: For Conformal Coat option, or Low Temperature Testing option please consult the factory for price and availability.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

