



Xiamen **YULONG** Group

Hainan **YULONG** Machinery

SFYL-trading brand of YULONG Group

Hainan Yulong: A Premier Professional Electric Vehicle Maker and Provider of Innovative Transportation Solutions Worldwide

Since its founding in June 2003, Hainan Yulong Machinery Technology Co., Ltd. has risen within the Shiziling Industrial Park of Haikou National High-tech Zone. With a substantial registered capital of 10 million yuan, it has established a modern manufacturing base covering 15,000 square meters, thus initiating an outstanding industrial saga.

As a wholly-owned subsidiary of Xiamen Yulong Industrial Investment Co., Ltd., which possesses six powerful factories, Hainan Yulong benefits from a sophisticated production management system and extensive prior experience in auto parts manufacturing. It concentrates on the field of electric vehicles for specific sites. Skillfully, it has crafted a series of high-quality products like mobile shop vehicles, electric sightseeing vehicles, golf carts, and modified vehicles. These products, with their excellent craftsmanship and innovative designs, fulfill diverse global scenario requirements. Additionally, relying on its profound technical accumulation and sharp market perception, Yulong has actively expanded its product line of special-purpose vehicles. Police vehicles, patrol vehicles, logistics transport vehicles, flatbed trucks, food delivery vehicles, sanitation sweeping vehicles, and small fire trucks are all available, comprehensively safeguarding every aspect of social operation and public services, demonstrating its strong sense of social responsibility and comprehensive manufacturing capabilities.

On the global trade stage, Yulong, with its own highly efficient logistics fleet, has built a seamless supply chain network. This ensures that products can reach customers around the world in the quickest manner and in the best condition. Moreover, its professional and promptly responsive after-sales service team offers all-round protection for customers. By converting the saved logistics costs into product value addition and attentive services, it achieves full coverage from enterprise-level services to individual user care. It always adheres to the core business concept of "Customer-centered, Outstanding Quality, Exceptional Service" and implements the integrated "Production - Sales - Maintenance" service model, making each cooperation the starting point of long-term trust.

Yulong's persistent pursuit of quality and innovation has received international authoritative recognition and acclaim. The company has successfully passed the strict IATF 16949 - 2016 system certification, becoming an industry quality benchmark. It has repeatedly won the "Supplier System Management Contribution Award" bestowed by customers and has consecutively obtained a series of honors such as "Innovative Enterprise", "High-tech Enterprise", "Standardization of Work Safety", and "Credit Member of Small and Medium-sized Enterprises in Haikou City". These achievements are not only an affirmation of Yulong's past efforts but also a solid foundation for it to progress towards the future and lead global innovative transportation solutions, continuously creating greater value for global customers and jointly building a glorious future.

海南宇龙：全球领先的专业车辆制造商与创新交通方案提供者

自 2003 年 6 月创立伊始，海南宇龙机械科技有限公司，以 1000 万元注册资金，于海口市国家高新区狮子岭工业园内崛起，构筑起 15000 平方米的现代化制造基地，开启了一段卓越的工业传奇。

作为坐拥6家实力工厂的--厦门宇龙实业投资有限公司--的全资子公司，海南宇龙脱胎于完善的生产管理体系和早年丰厚的汽车配件生产经验，专注于场地电动用车领域，匠心独运地打造移动店车、电动观光车、高尔夫球车、改装车等精品系列，以精湛工艺和创新设计满足全球多样化场景需求。同时，凭借深厚的技术积累与敏锐的市场洞察，宇龙积极拓展特殊用途车辆产品线，警务车、巡逻车、物流运输车、平板车、送餐车、环卫清扫车以及小型消防车等一应俱全，全方位守护社会运转与公共服务的每一个角落，彰显强大的社会责任担当与综合制造实力。

在全球贸易的舞台上，宇龙凭借自有高效物流车队，构建起无缝连接的供应链网络，确保产品能以最快速度、最优状态抵达世界各地客户手中。而其专业且快速响应的售后服务团队，更是全天候为客户保驾护航，将节省的物流成本转化为产品增值与贴心服务，实现从企业级服务到个人用户关怀的全覆盖，始终践行“以客户为中心，品质卓越，服务超凡”的核心经营理念，贯彻“生产 - 销售 - 维修”一体化的全程无忧服务模式，让每一次合作都成为长期信赖的起点。

宇龙对品质与创新的执着追求，获得了国际权威的认可与赞誉。公司成功通过严苛的《IATF16949 - 2016》体系认证，成为行业品质标杆。多次荣膺客户授予的《供应商体系管理贡献奖》，并接连斩获《创新性企业》《高新技术企业》《安全生产标准化》《海口市中小企业信用会员》等一系列殊荣，这不仅是对宇龙过去努力的肯定，更是其迈向未来、引领全球交通创新解决方案的坚实基础，持续为全球客户创造更大价值，携手共铸辉煌未来。

目录 / DIRECTORY

01

YULONG Honor



02

YLEV Golf



23

Vintage car



25

Patrol Car

29


Patrol Car
Hummer Style



32

Minibus



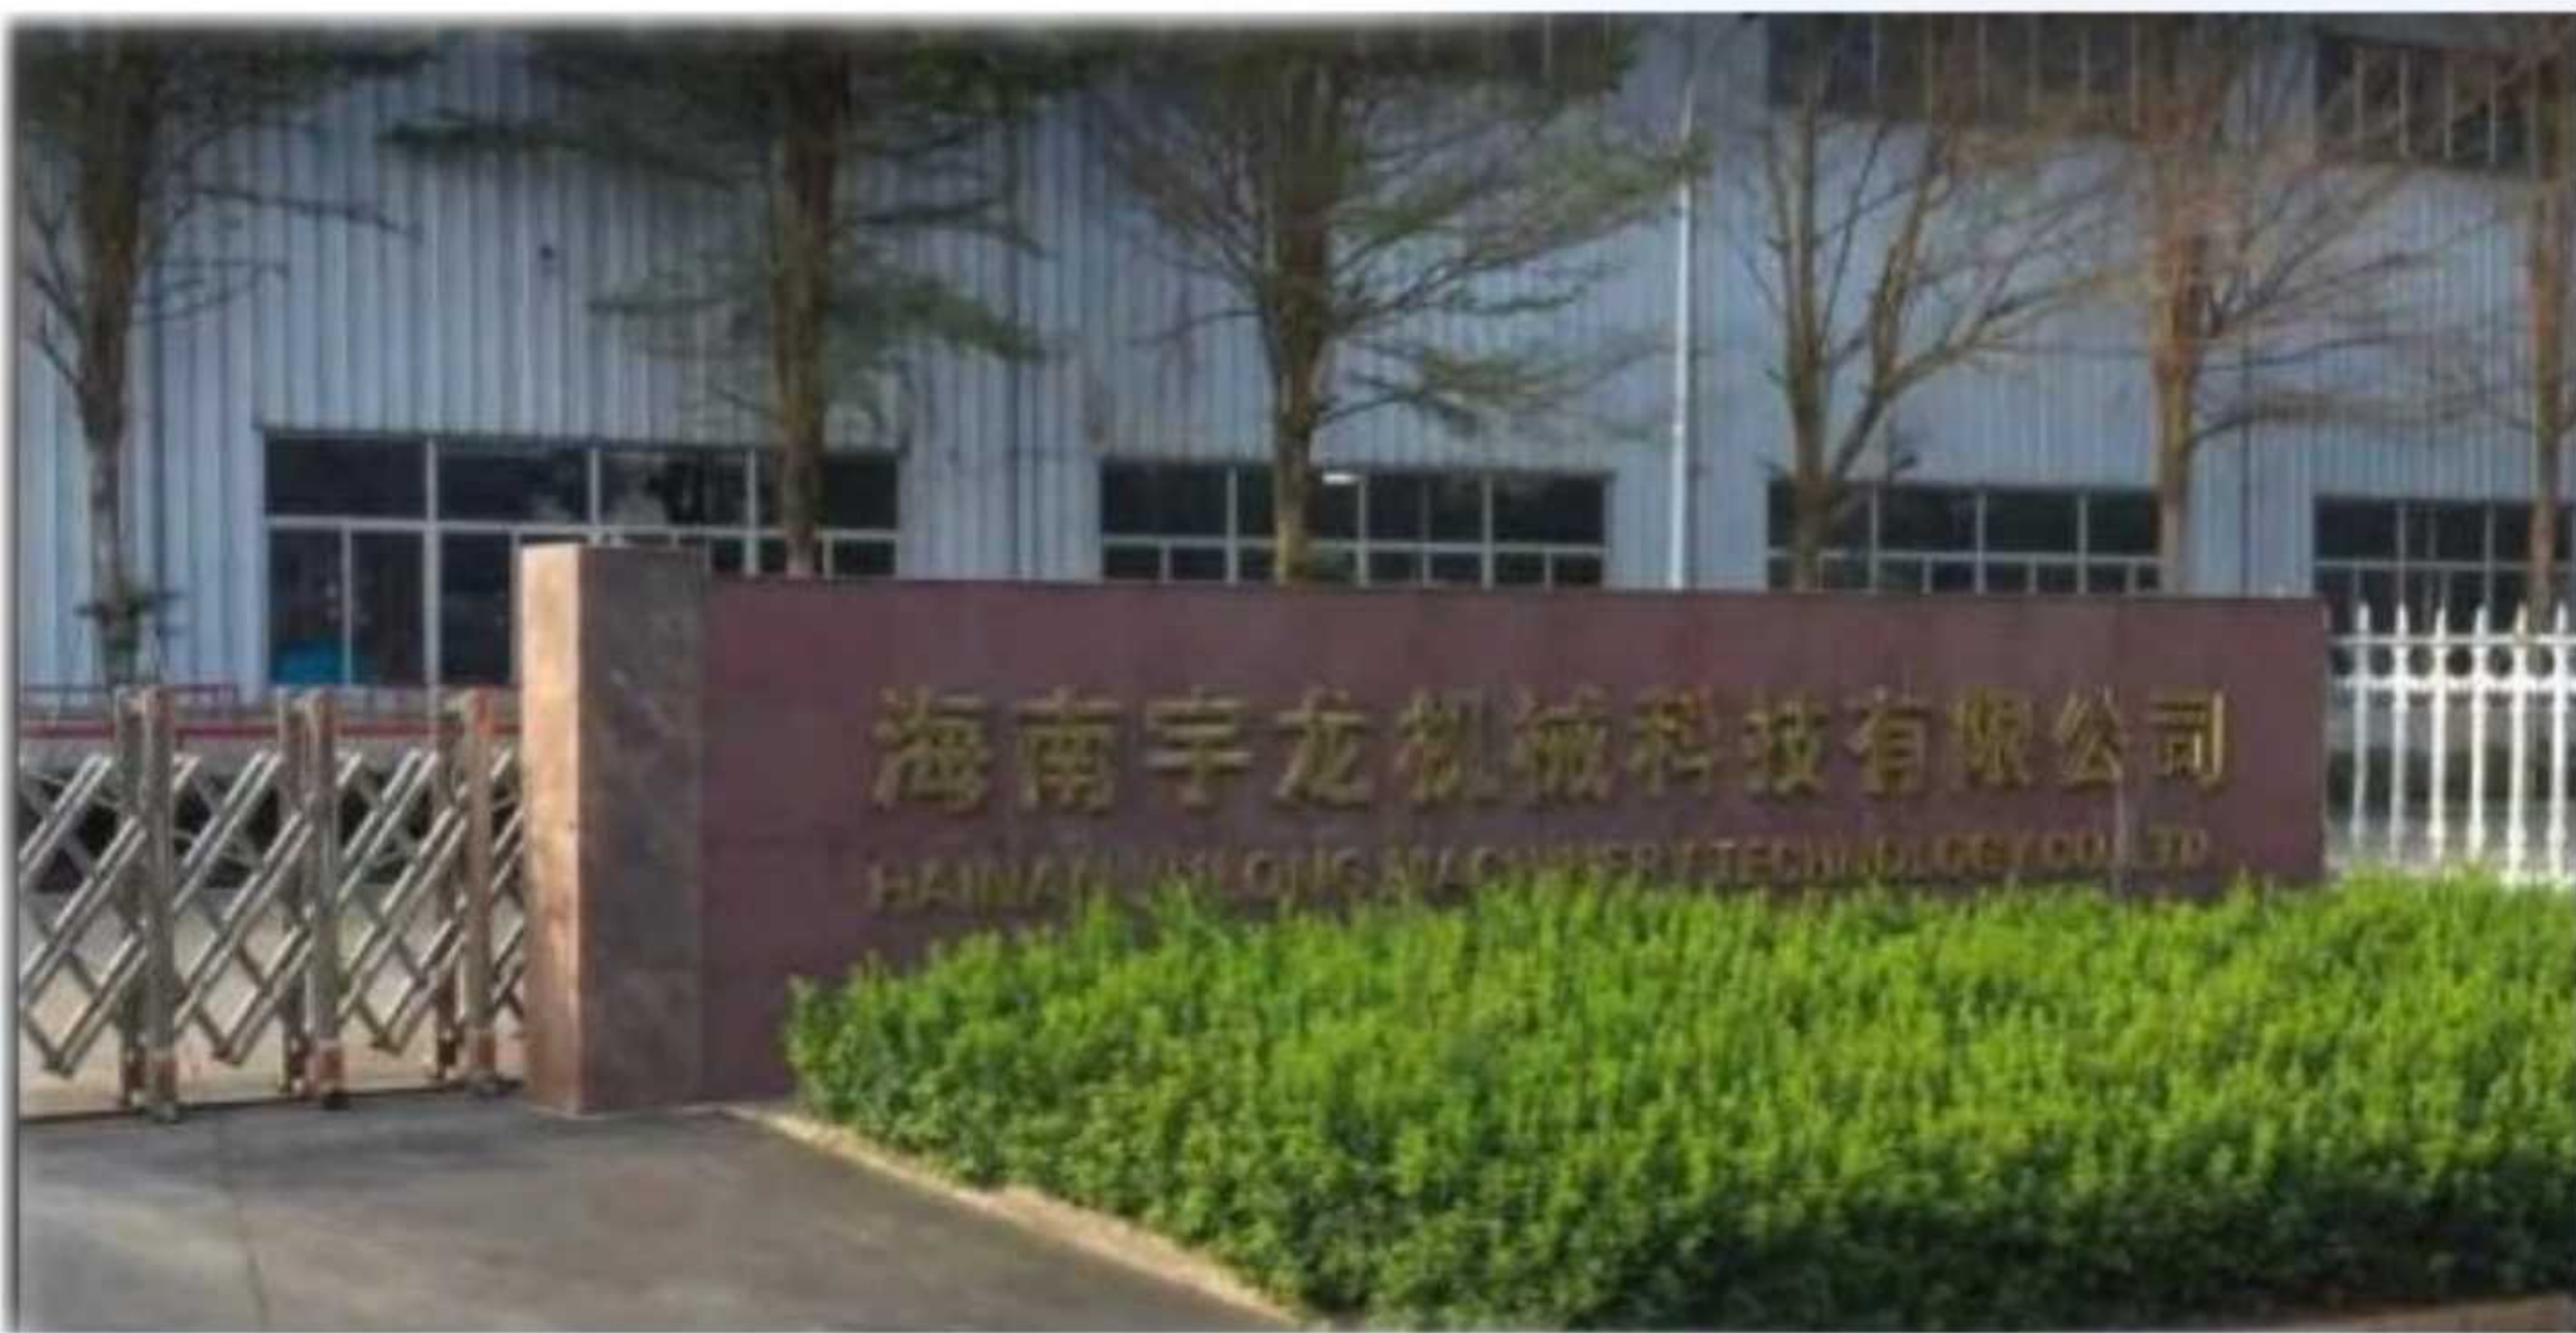



YULONG Honor





Golf Cart 2+2 Seaters

YLEVL-E-Golf-2+2

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	3.9m
长宽高 (MM) Length, width, and height (MM)	2770*1240*1850
轴距 Wheelbase	2430
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人

整车装备质量 (kg) Vehicle equipment mass (kg)	470
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	前桥半浮式 Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Hunting Buggy 2+2 Seaters

YLEVL-C-Hunting-2+2

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	5.6m
长宽高 (MM) Length, width, and height (MM)	2770*1240*1850
轴距 Wheelbase	1630
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续航里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人

车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
整车装备质量 (kg) Vehicle equipment mass (kg)	470
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	20X10.10-10 铁轮真空子午胎 20X10.10-10 iron wheel vacuum radial tire





Golf Cart 2+2 Seaters

YLEVL-C-Golf-2+2

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	2.7m
长宽高 (MM) Length, width, and height (MM)	2770*1240*1850
轴距 Wheelbase(mm)	1600
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人

整车装备质量 (kg) Vehicle equipment mass (kg)	470
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	前桥半浮式 Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 2 Seaters

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,

YLEVL-C-Golf-2



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	2.7m
长宽高 (MM) Length, width, and height (MM)	2340*1200*1850
轴距 Wheelbase	1650
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续航里程 Driving range	70-110km
额定乘员 Allowable passenger	2 人

整车装备质量 (kg) Vehicle equipment mass (kg)	450
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	前桥半浮式 Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 4+2 Seaters

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,

YLEVL-C-Golf-4+2



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	4.35m
长宽高 (MM) Length, width, and height (MM)	3550*1200*1850
轴距 Wheelbase	2430
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	2 人

整车装备质量 (kg) Vehicle equipment mass (kg)	590
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 4 Seaters

YLEVL-C-Golf-4

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parametes

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	4.35m
长宽高 (MM) Length, width, and height (MM)	3120*1200*1850
轴距 Wheelbase	2430
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续航里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人

整车装备质量 (kg) Vehicle equipment mass (kg)	510
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 6+2 Seaters

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,

YLEVL-C-Golf-6+2



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	4.35m
长宽高 (MM) Length, width, and height (MM)	4310*1200*1850
轴距 Wheelbase	3190
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	8 人

整车装备质量 (kg) Vehicle equipment mass (kg)	610
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 6 Seaters

YLEVL-C-Golf-6

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	4.35m
长宽高 (MM) Length, width, and height (MM)	3880*1200*1850
轴距 Wheelbase	3190
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	6 人

整车装备质量 (kg) Vehicle equipment mass (kg)	590
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 8 Seaters

YLEVL-C-Golf-8

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	4.35m
长宽高 (MM) Length, width, and height (MM)	4640*1200*1850
轴距 Wheelbase	3950
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续航里程 Driving range	70-110km
额定乘员 Allowable passenger	8 人

整车装备质量 (kg) Vehicle equipment mass (kg)	670
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 2Seaters+Trunk

YLEVL-C-Golf-2+Trunk

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	3.9m
长宽高 (MM) Length, width, and height (MM)	2340*1200*1850/(1000*1000*300 货斗尺寸 Container size)
轴距 Wheelbase	1650
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	2 人

整车装备质量 (kg) Vehicle equipment mass (kg)	450
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 2Seaters+Van

YLEVL-C-Golf-2+Van

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw/7.5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	4.35m
长宽高 (MM) Length, width, and height (MM)	4310*1200*1850
轴距 Wheelbase	3190
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	2 人

整车装备质量 (kg) Vehicle equipment mass (kg)	810
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





6 Seaters Hungting Buggy

YLEVL-C-Hunting-6


- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	5.6m
长宽高 (MM) Length, width, and height (MM)	3880*1200*1850
轴距 Wheelbase	3950
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	6 人

整车装备质量 (kg) Vehicle equipment mass (kg)	670
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	前碟后鼓、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	20X10.10-10 铁轮真空子午胎 20X10.10-10 iron wheel vacuum radial tire

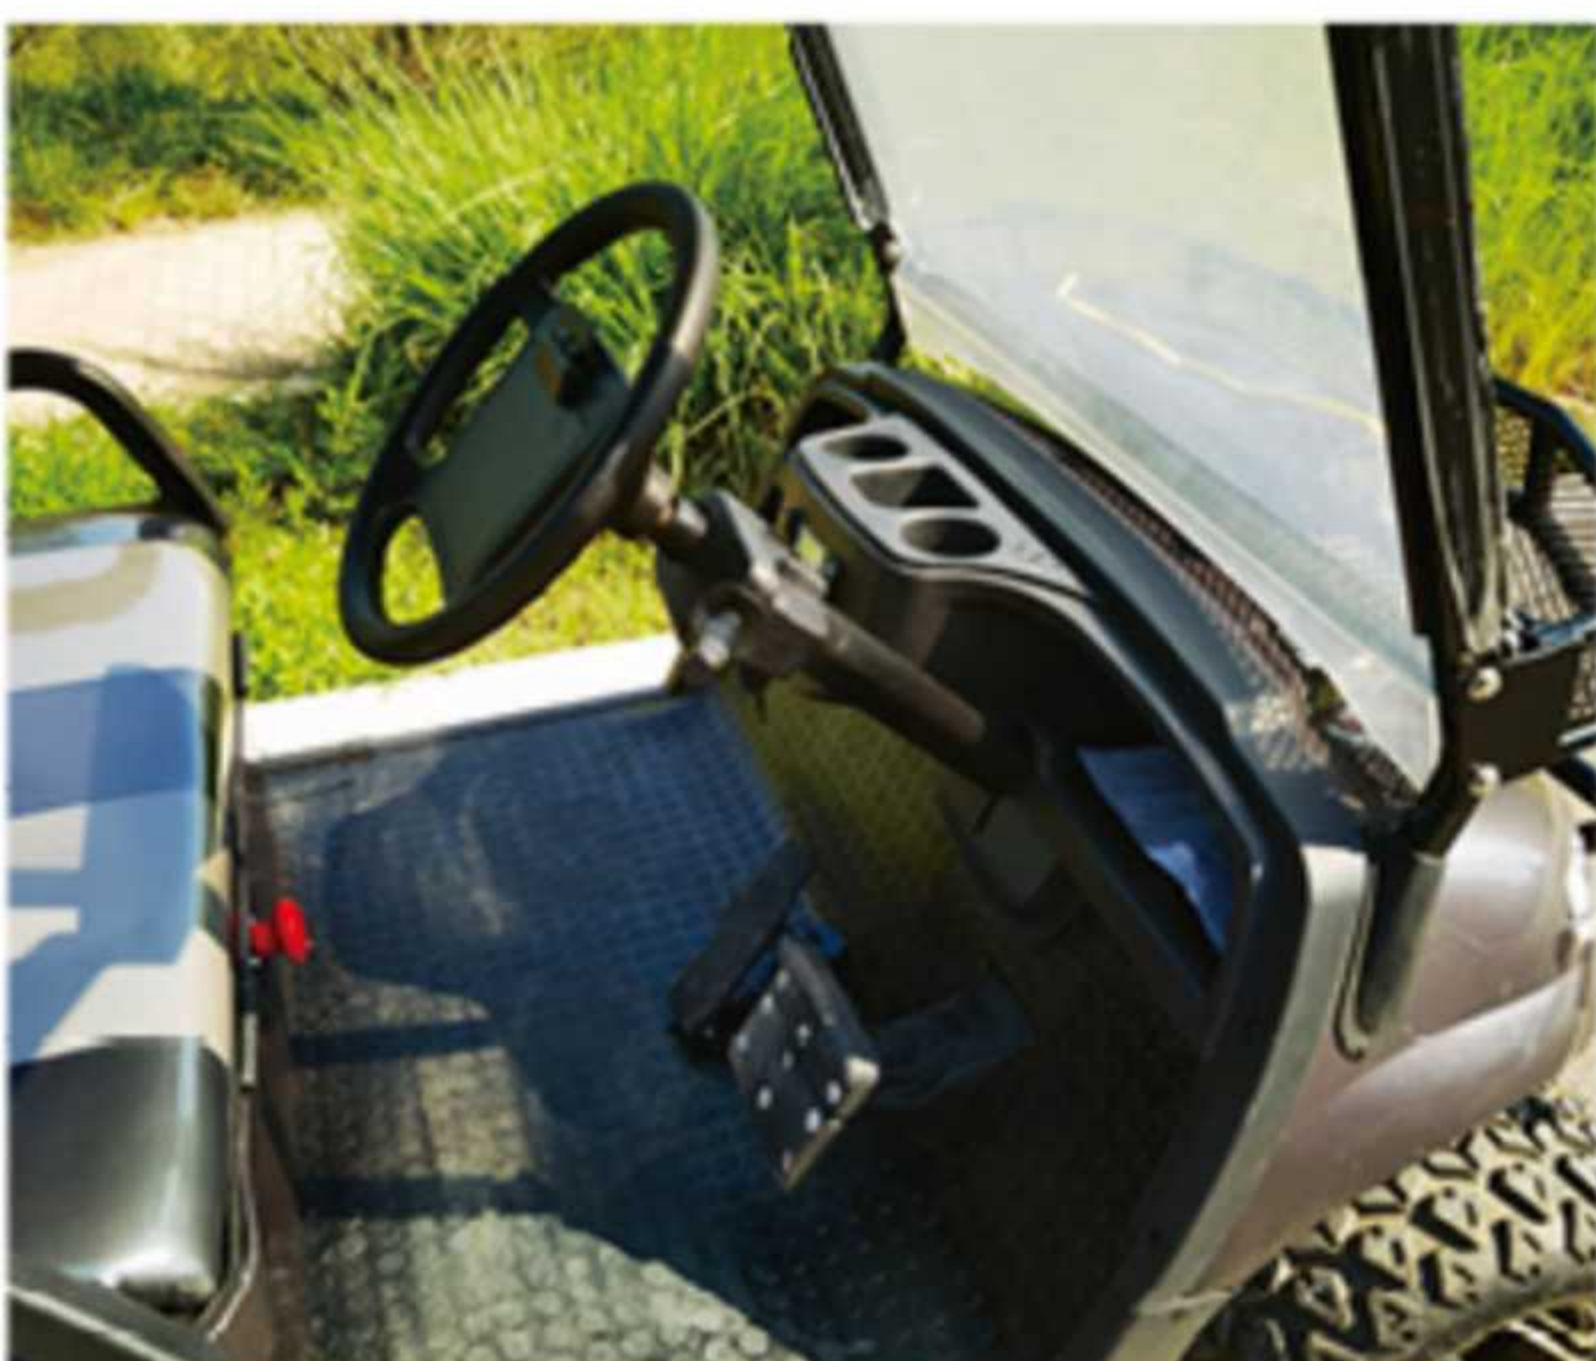



4+2 Seaters Hungting Buggy

YLEVL-C-Hunting-4+2

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	4.35m
长宽高 (MM) Length, width, and height (MM)	3550*1200*1850
轴距 Wheelbase	2430
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	6 人

整车装备质量 (kg) Vehicle equipment mass (kg)	590
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	20*10.00-10 铁轮真空子午胎 iron wheel vacuum radial tire





Hungting Buggy 2Seaters + Trunk

YLEVL-C-Hunting -2+Trunk

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	3.9m
长宽高 (MM) Length, width, and height (MM)	2350*1200*1850(斗 1100*830*270)
轴距 Wheelbase	2400
轮距 (前后)Track width (front and rear)	-
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	2 人

整车装备质量 (kg) Vehicle equipment mass (kg)	510
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	前后碟鼓，四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	20*10.00-10 铁轮真空子午胎 iron wheel vacuum radial tire





Hungting Buggy 4Seaters + Trunk

YLEVL-C-Hunting -4+Trunk

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	3.9m
长宽高 (MM) Length, width, and height (MM)	3100*1200*1850(斗 1100*830*270)
轴距 Wheelbase	2400
轮距 (前后)Track width (front and rear)	-
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人

整车装备质量 (kg) Vehicle equipment mass (kg)	510
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	前碟后鼓，四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	20X10.10-10 真空子午胎 20X10.10-10 iron wheel vacuum radial tire





Golf Cart 2+2 Seaters

YLEVL-A-Golf-2+2

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	2.7m
长宽高 (MM) Length, width, and height (MM)	2800*1240*1850
轴距 Wheelbase	1650
轮距 (前后) Track width (front and rear)	900/1000
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续航里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人

整车装备质量 (kg) Vehicle equipment mass (kg)	470
车体 car body	钢制车架 + 注塑外壳 / ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	前桥半浮式 Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	24X8.10-12 真空子午胎 20X10.10-10 iron wheel vacuum radial tire





Golf Cart 6+2 Seaters

YLEVL-A-Golf-6+2

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:

- > golf courses,
- > farm and ranch
- > amusement parks,
- > parks,
- > classic resorts and hotels,
- > large shopping malls,
- > scenic spots,
- > campuses,
- > airports,
- > harbors,
- > property development
- > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	5.3m
长宽高 (MM) Length, width, and height (MM)	4310*1200*1850
轴距 Wheelbase	3100
轮距 (前后)Track width (front and rear)	900/1000
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	8 人

整车装备质量 (kg) Vehicle equipment mass (kg)	610
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Golf Cart 2 Seaters+Van

YLEVL-A-Golf-2+Van

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	3.9m
长宽高 (MM) Length, width, and height (MM)	3100*1200*1850(保温箱 1400*1200*1200)
轴距 Wheelbase	2400
轮距 (前后)Track width (front and rear)	-
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续航里程 Driving range	70-110km
额定乘员 Allowable passenger	2 人

整车装备质量 (kg) Vehicle equipment mass (kg)	590
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	前碟后鼓，四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Mini-ambulance Golf Cart 4seaters+Stretcher

YLEVL-A-Golf-4+Stretcher

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电器 Charger	车载式智能化充电器 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	5.6m
长宽高 (MM) Length, width, and height (MM)	4640*1200*1850
轴距 Wheelbase	3950
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续驶里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人
整车装备质量 (kg) Vehicle equipment mass (kg)	670

车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	205/50-10 铁轮真空子午胎 205/50-10 iron wheel vacuum radial tire





Hunting Buggy 2+2 Seaters

YLEVL-D-Hunting-2+2

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电器 Charger	车载式智能化充电器 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	5.6m
长宽高 (MM) Length, width, and height (MM)	2770*1240*1850
轴距 Wheelbase	1630
轮距 (前后) Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续航里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人
整车装备质量 (kg) Vehicle equipment mass (kg)	470

车体 car body	钢制车架 + 注塑外壳 / ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	麦弗逊独立悬挂 / 前桥半浮式 MacPherson independent suspension/Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	前碟后鼓，四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	20X10.00X12 铁轮真空子午胎 iron wheel vacuum radial tire





Golf Cart 2+2 Seaters

YLEVL-F-Golf-2+2

- Novel appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
充电输入电压 Charging input voltage	220V
最大行驶速度 Maximum driving speed	30km/h
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	3.9m
长宽高 (MM) Length, width, and height (MM)	2770*1240*1850
轴距 Wheelbase	2430
轮距 (前后)Track width (front and rear)	940/1030
制动距离 braking distance	≤ 5m
最小离地间隙 Minimum ground clearance	120mm
续航里程 Driving range	70-110km
额定乘员 Allowable passenger	4 人

整车装备质量 (kg) Vehicle equipment mass (kg)	470
车体 car body	钢制车架 + 注塑外壳 /ABS 工程塑料成型件 Steel frame+injection molded shell/ABS engineering plastic molded parts
仪表 instrument	仪表显示电压、电量 The instrument displays voltage and power
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
灯光及信号 Lights and signals	LED 组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 LED combination front light, turn signal, combination rear tail light, brake light, electric horn
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
车架 frame	钢结构车架 Steel frame
方向盘 steering wheel	聚氨酯发泡方向盘 Polyurethane foam steering wheel
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前桥及悬挂 Front axle and suspension	前桥半浮式 Front axle semi floating
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	四轮鼓式液压制动器、双回路液压制动、驻车制动装置 Four wheel drum hydraulic brake, dual circuit hydraulic brake, parking brake device
车轮 wheel	20X10.00X12 铁轮真空子午胎 iron wheel vacuum radial tire





Vintage Car 11 Seaters

YLEVL-V11

- Vintage appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
额定乘员 Allowable passenger	11 人
长 * 宽 * 高 Length * width * height	5100*1550*2000
续航里程 Range	≥ 80Km
系统电压 system voltage	48v/60v/72V
最小转弯半径 Minimum turning radius	5.9m
最大爬坡度 Maximum Climbing Slope	≥ 20%
制动距离 braking distance	≤ 5m
最高时速 Top speed	30Km/h
电机功率 Motor power	4KW/5KW/7.5KW
整备质量 curb weight	850Kg
轴距 Wheelbase	3480
轮距 (前后)Track width (front and rear)	1420/1460

座椅 seat	客车发泡海绵 + 高回弹面料 Bus foam sponge+high rebound fabric
车体 car body	钢结构车架 + 铁壳一体冲压车身 Steel frame+iron shell integrated stamping body
仪表 instrument	数字显示液晶仪表 (含电压、车速、里程、灯光、前后换向等信号) Digital display LCD instrument panel (including signals such as voltage, vehicle speed, mileage, lighting, front and rear reversing, etc.)
方向盘 steering wheel	汽车方向盘 Car steering wheel
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
车身玻璃 Body glass	具有 3C 证书, 中国强制性产品认证 With 3C certificate, China Compulsory Product Certification
灯光及信号 Lights and signals	组合前灯、组合后尾灯 Combination front light, combination rear tail light
音响 sound	车载收音机倒车影像一体机 Car radio reverse camera all-in-one machine
线束 Wire harness	国标防水阻燃线束 + 汽车保险盒系统 National standard waterproof and flame-retardant wire harness+automotive fuse box system
顶拉手 Top handle	标配 Standard configuration
动力传动系统 Power transmission system	无级变速系统带爬坡功能 Continuously variable transmission system with hill climbing function
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前后桥及悬挂 Front and rear axles and suspension	前桥后桥半浮式悬挂系统 Front and rear semi floating suspension systems,
制动系统 braking system	四轮鼓刹, 双回路液压制动 Four wheel drum brake, dual circuit hydraulic brake
轮胎 tyre	公路专用轮胎 165R13、铝轮毂 Highway specific tire 165R13, aluminum wheels





Vintage Car 8 Seaters

YLEVL-V8

- Vintage appearance
- Comfortable transportation
- Safety drive
- Flexible control
- Can be used in:
 - > golf courses,
 - > farm and ranch
 - > amusement parks,
 - > parks,
 - > classic resorts and hotels,
 - > large shopping malls,
 - > scenic spots,
 - > campuses,
 - > airports,
 - > harbors,
 - > property development
 - > etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载式智能化充电机 Vehicle mounted intelligent charger
充电时间 Charging time	8-9 小时 (放电率为 80%) 8-9 hours (discharge rate of 80%)
额定乘员 Allowable passenger	8 人
长 * 宽 * 高 Length * width * height	4350*1550*2000
续航里程 Range	≥ 80Km
系统电压 system voltage	48v/60v/72V
最小转弯半径 Minimum turning radius	4m
最大爬坡度 Maximum Climbing Slope	≥ 20%
制动距离 braking distance	≤ 5m
最高时速 Top speed	30Km/h
电机功率 Motor power	4KW/5KW/7.5KW
整备质量 curb weight	780Kg
轴距 Wheelbase	2700
轮距 (前后) Track width (front and rear)	1420/1460
座椅 seat	客车发泡海绵 + 高回弹面料 Bus foam sponge+high rebound fabric
车体 car body	钢结构车架 + 铁壳一体冲压车身 Steel frame+iron shell integrated stamping body

仪表 instrument	数字显示液晶仪表 (含电压、车速、里程、灯光、前后换向等信号) Digital display LCD instrument panel (including signals such as voltage, vehicle speed, mileage, lighting, front and rear reversing, etc.)
方向盘 steering wheel	汽车方向盘 Car steering wheel
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
车身玻璃 Body glass	具有 3C 证书, 中国强制性产品认证 With 3C certificate, China Compulsory Product Certification
灯光及信号 Lights and signals	组合前灯、组合后尾灯 Combination front light, combination rear tail light
音响 sound	车载收音机倒车影像一体机 Car radio reverse camera all-in-one machine
线束 Wire harness	国标防水阻燃线束 + 汽车保险盒系统 National standard waterproof and flame-retardant wire harness+automotive fuse box system
顶拉手 Top handle	标配 Standard configuration
动力传动系统 Power transmission system	无级变速系统带爬坡功能 Continuously variable transmission system with hill climbing function
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前后桥及悬挂 Front and rear axles and suspension	前桥后桥半浮式悬挂系统 Front and rear semi floating suspension systems,
制动系统 braking system	四轮鼓刹, 双回路液压制动 Four wheel drum brake, dual circuit hydraulic brake
轮胎 tyre	公路专用轮胎 165R13、铝轮毂 Highway specific tire 165R13, aluminum wheels





Patrol Car 8 Seaters

YLEVL-PD8



Applicable to patrol officers:
> in the city, district, street, city management
> enterprise agglomeration management
> area, parks, entertainment venues,
> hospitals, airports, yards and heads,
> gardens and forests, neighborhoods, property and etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载智能充电器 Car smart charger
充电时间 Charging time	8-10 小时 hours
额定乘员 Allowable passenger	8 人 people
长 * 宽 * 高 Length * width * height	4000*1650*2000
续航里程 Range	≥ 80Km
系统电压 system voltage	48V/60V/72V
最小转弯半径 Minimum turning radius	5m
最大爬坡度 Maximum Climbing Slope	≥ 30%
制动距离 braking distance	≤ 5m
最高时速 Top speed	30Km/h
电机功率 Motor power	3.5kw/4kw/5kw/7.5kw
整备质量 curb weight	900Kg
轴距 Wheelbase	2880
座椅 seat	客车发泡海绵 + 高回弹面料 Bus foam sponge+high rebound fabric
车体 car body	钢结构车架 + 铁壳一体冲压车身 Steel frame+iron shell integrated stamping body
车门 Door	有 have

仪表 instrument	数字显示液晶仪表 (含电压、车速、里程、灯光、前后换向等信号) Digital display LCD instrument panel (including signals such as voltage, vehicle speed, mileage, lighting, front and rear reversing, etc.)
方向盘 steering wheel	汽车方向盘 Car steering wheel
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
车身玻璃 Body glass	具有 3C 证书, 中国强制性产品认证 With 3C certificate, China Compulsory Product Certification
灯光及信号 Lights and signals	组合前灯、组合后尾灯 Combination front light, combination rear tail light
音响 sound	车载 MP3 多媒体一体机、倒车影像、专业扬声器 Car mounted MP3 multimedia all-in-one machine, reverse camera, professional speaker
线束 Wire harness	国标防水阻燃线束 + 汽车保险盒系统 National standard waterproof and flame-retardant wire harness+automotive fuse box system
顶拉手 Top handle	标配 Standard configuration
警灯 Warning lights	LED 高效爆闪警用灯 LED high-efficiency explosive flashing alarm light
动力传动系统 Power transmission system	无级变速系统带爬坡功能 Continuously variable transmission system with hill climbing function
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前后桥及悬挂 Front and rear axles and suspension	麦弗逊独立悬挂 / 后桥半浮式悬挂系统 MacPherson independent suspension/Front and rear semi floating suspension systems
制动系统 braking system	前碟后鼓制动器, 双回路液压制动 Front disc and rear drum brakes, dual circuit hydraulic braking
轮胎 tyre	公路专用轮胎 155-65R13、铝轮毂 155-65R13 highway tires, aluminum wheels

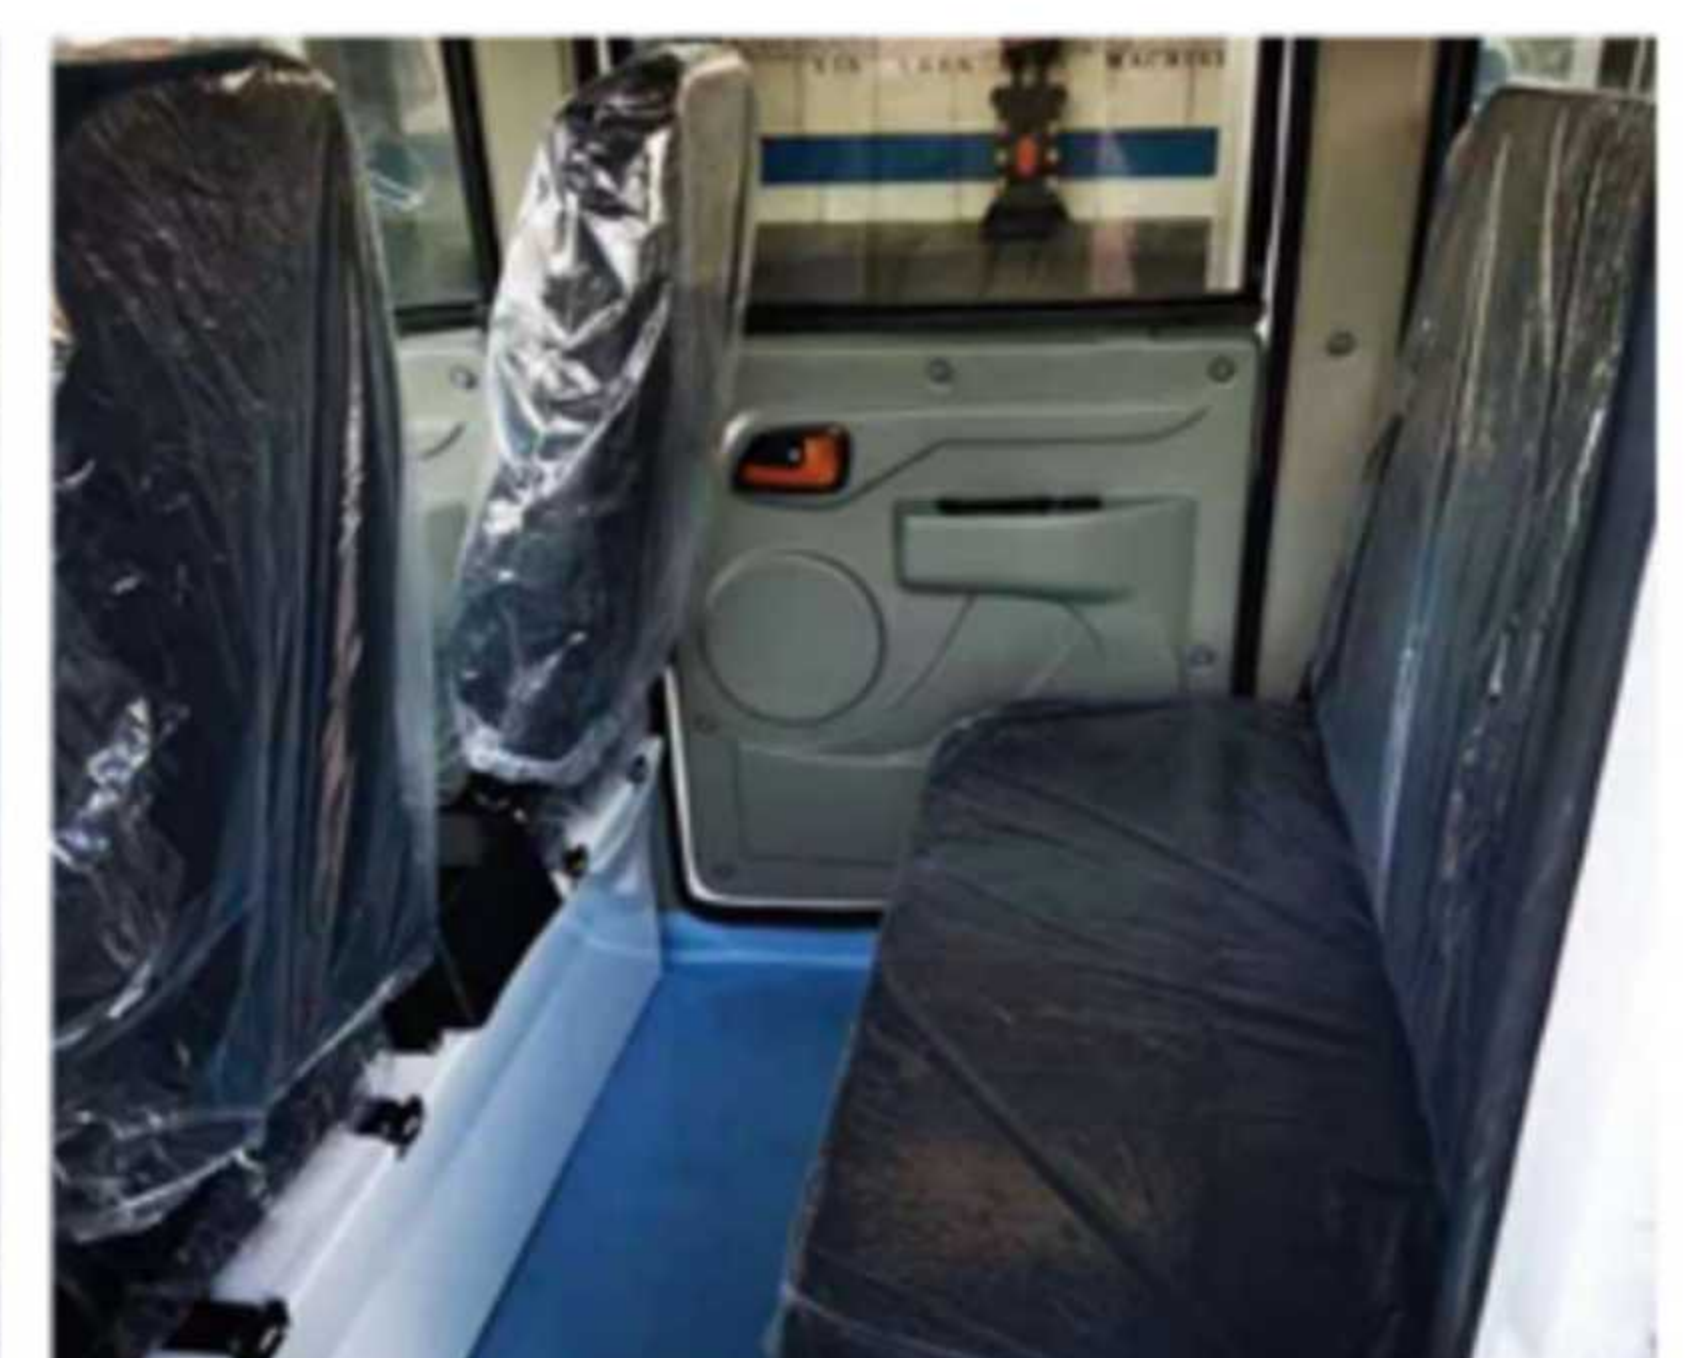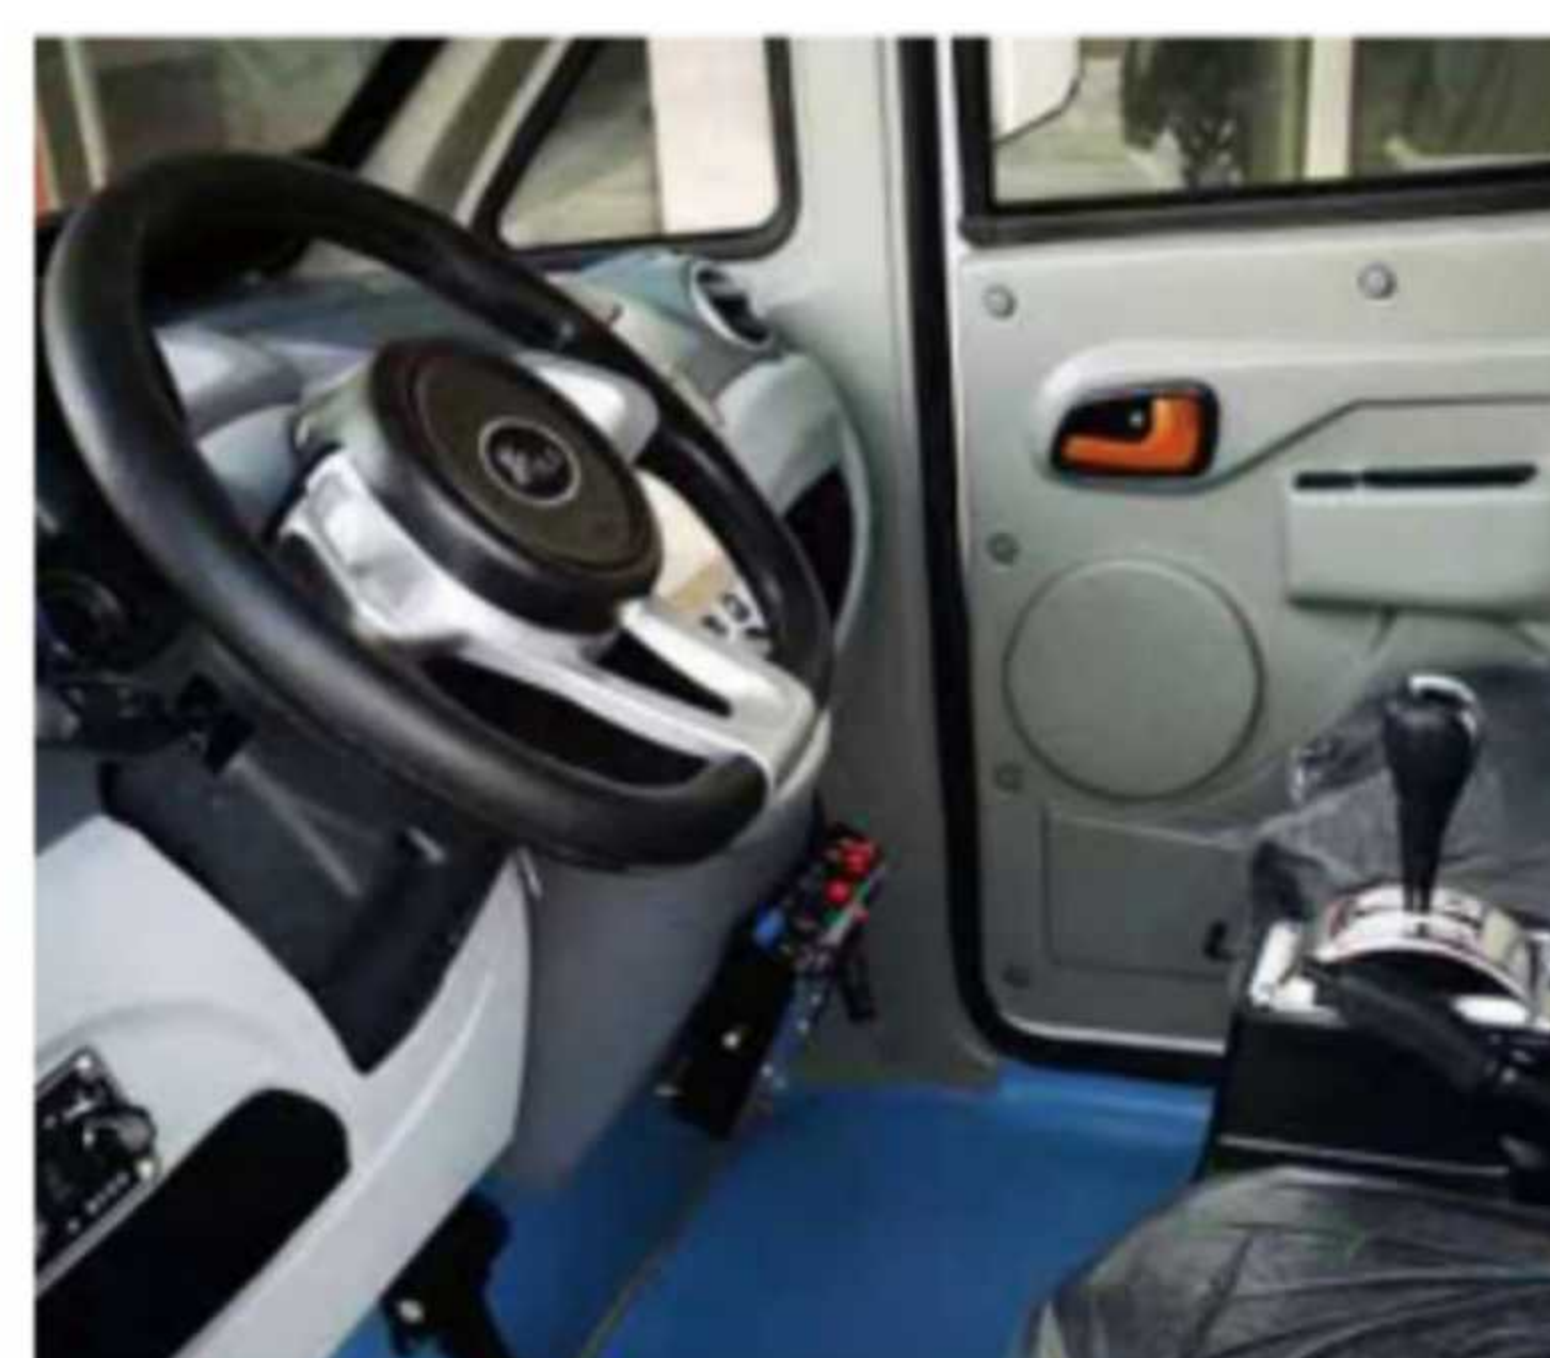



Patrol Car 5 Seaters

Applicable to patrol officers:
> in the city, district, street, city management
> enterprise agglomeration management
> area, parks, entertainment venues,
> hospitals, airports, yards and heads,
> gardens and forests, neighborhoods, property and etc.,

YLEVL-P05



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载智能充电器 Car smart charger
充电时间 Charging time	8-10 小时 hours
额定乘员 Allowable passenger	5 人 people
长 * 宽 * 高 Length * width * height	3300*1650*2000
续航里程 Range	≥ 80Km
系统电压 system voltage	48V/60V/72V
最小转弯半径 Minimum turning radius	2.5m
最大爬坡度 Maximum Climbing Slope	≥ 30%
制动距离 braking distance	≤ 5m
最高时速 Top speed	30Km/h
电机功率 Motor power	3.5kw/4kw/5kw/7.5kw
整备质量 curb weight	800Kg
轴距 Wheelbase	2080
座椅 seat	客车发泡海绵 + 高回弹面料 Bus foam sponge+high rebound fabric
车体 car body	钢结构车架 + 铁壳一体冲压车身 Steel frame+iron shell integrated stamping body

车门 Door	-
仪表 instrument	数字显示液晶仪表 (含电压、车速、里程、灯光、前后换向等信号) Digital display LCD instrument panel (including signals such as voltage, vehicle speed, mileage, lighting, front and rear reversing, etc.)
方向盘 steering wheel	汽车方向盘 Car steering wheel
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
车身玻璃 Body glass	具有 3C 证书, 中国强制性产品认证 With 3C certificate, China Compulsory Product Certification
灯光及信号 Lights and signals	组合前灯、组合后尾灯 Combination front light, combination rear tail light
音响 sound	车载 MP3 多媒体一体机、倒车影像、专业扬声器 Car mounted MP3 multimedia all-in-one machine, reverse camera, professional speake
线束 Wire harness	国标防水阻燃线束 + 汽车保险盒系统 National standard waterproof and flame-retardant wire harness+automotive fuse box system
顶拉手 Top handle	标配 Standard configuration
警灯 Warning lights	LED 高效爆闪警用灯 LED high-efficiency explosive flashing alarm light
动力传动系统 Power transmission system	无级变速系统带爬坡功能 Continuously variable transmission system with hill climbing function
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前后桥及悬挂 Front and rear axles and suspension	麦弗逊独立悬挂 / 后桥半浮式悬挂系统 MacPherson independent suspension/Front and rear semi floating suspension systems
制动系统 braking system	前碟后鼓制动器, 双回路液压制动 Front disc and rear drum brakes, dual circuit hydraulic braking
轮胎 tyre	公路专用轮胎 155-65R13、铝轮毂 155-65R13 highway tires, aluminum wheels





Patrol Car 5 Seaters

YLEVL-PD5


Applicable to patrol officers:
> in the city, district, street, city management
> enterprise agglomeration management
> area, parks, entertainment venues,
> hospitals, airports, yards and heads,
> gardens and forests, neighborhoods, property and etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载智能充电器 Car smart charger
充电时间 Charging time	8-10 小时 hours
额定乘员 Allowable passenger	5 人 people
长 * 宽 * 高 Length * width * height	3300*1650*2000
续航里程 Range	≥ 80Km
系统电压 system voltage	48V/60V/72V
最小转弯半径 Minimum turning radius	2.5m
最大爬坡度 Maximum Climbing Slope	≥ 30%
制动距离 braking distance	≤ 5m
最高时速 Top speed	30Km/h
电机功率 Motor power	3.5kw/4kw/5kw/7.5kw
整备质量 curb weight	830Kg
轴距 Wheelbase	2080
座椅 seat	客车发泡海绵 + 高回弹面料 Bus foam sponge+high rebound fabric
车体 car body	钢结构车架 + 铁壳一体冲压车身 Steel frame+iron shell integrated stamping body
车门 Door	有 have

仪表 instrument	数字显示液晶仪表 (含电压、车速、里程、灯光、前后换向等信号) Digital display LCD instrument panel (including signals such as voltage, vehicle speed, mileage, lighting, front and rear reversing, etc.)
方向盘 steering wheel	汽车方向盘 Car steering wheel
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
车身玻璃 Body glass	具有 3C 证书, 中国强制性产品认证 With 3C certificate, China Compulsory Product Certification
灯光及信号 Lights and signals	组合前灯、组合后尾灯 Combination front light, combination rear tail light
音响 sound	车载 MP3 多媒体一体机、倒车影像、专业扬声器 Car mounted MP3 multimedia all-in-one machine, reverse camera, professional speake
线束 Wire harness	国标防水阻燃线束 + 汽车保险盒系统 National standard waterproof and flame-retardant wire harness+automotive fuse box system
顶拉手 Top handle	标配 Standard configuration
警灯 Warning lights	LED 高效爆闪警用灯 LED high-efficiency explosive flashing alarm light
动力传动系统 Power transmission system	无级变速系统带爬坡功能 Continuously variable transmission system with hill climbing function
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前后桥及悬挂 Front and rear axles and suspension	麦弗逊独立悬挂 / 后桥半浮式悬挂系统 MacPherson independent suspension/Front and rear semi floating suspension systems
制动系统 braking system	前碟后鼓制动器, 双回路液压制动 Front disc and rear drum brakes, dual circuit hydraulic braking
轮胎 tyre	公路专用轮胎 155-65R13、铝轮毂 155-65R13 highway tires, aluminum wheels

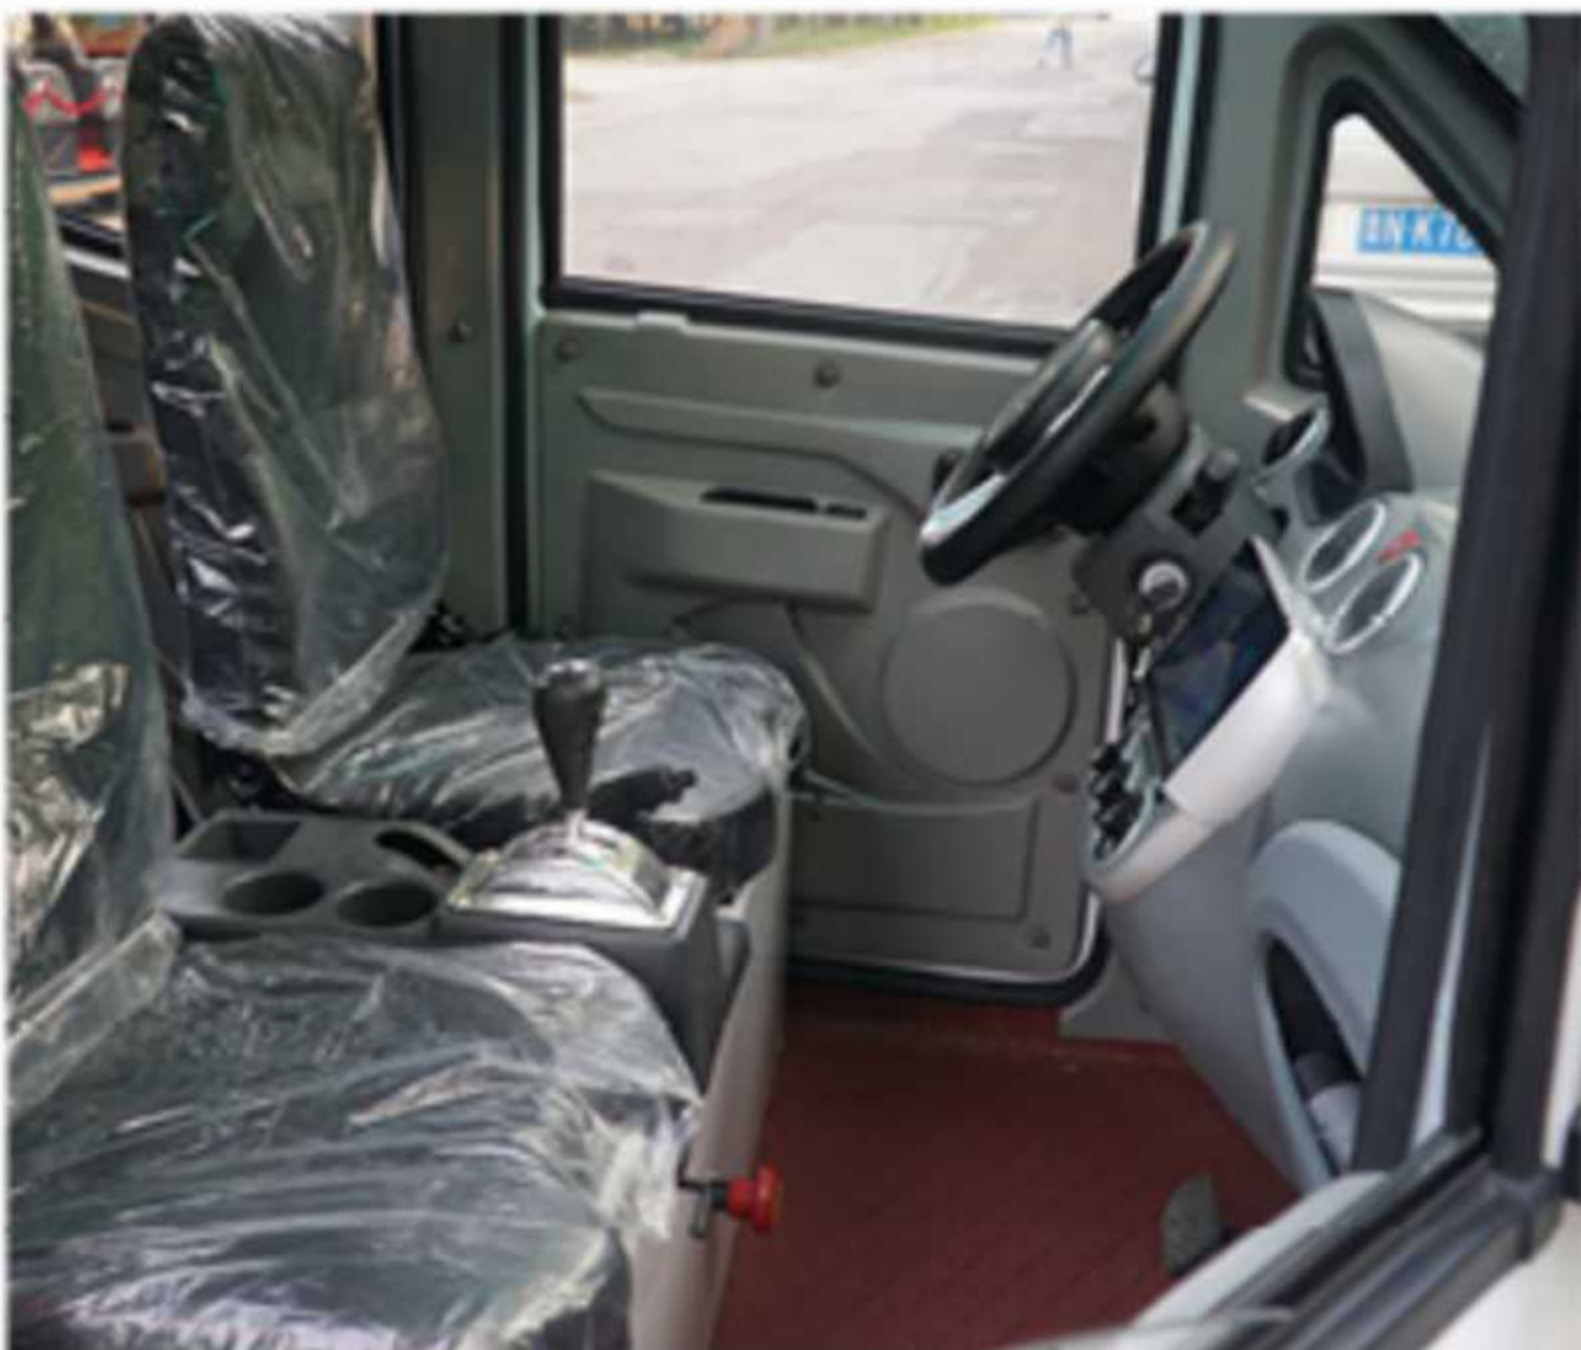



Patrol Pick-up Truck 5 Seaters

YLEVL-PXD5

Applicable to patrol officers:
> in the city, district, street, city management
> enterprise agglomeration management
> area, parks, entertainment venues,
> hospitals, airports, yards and heads,
> gardens and forests, neighborhoods, property and etc.,



Parameters

电控 Electric control	48v/60v/72v 全智能电控 fully intelligent electronic control
电池 battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	车载智能充电器 Car smart charger
充电时间 Charging time	8-10 小时 hours
额定乘员 Allowable passenger	5 人 people
长 * 宽 * 高 Length * width * height	3300*1650*2000
续航里程 Range	≥ 80Km
系统电压 system voltage	48V/60V/72V
最小转弯半径 Minimum turning radius	5m
最大爬坡度 Maximum Climbing Slope	≥ 30%
制动距离 braking distance	≤ 5m
最高时速 Top speed	30Km/h
电机功率 Motor power	3.5kw/4kw/5kw/7.5kw
整备质量 curb weight	830Kg
轴距 Wheelbase	2080
座椅 seat	客车发泡海绵 + 高回弹面料 Bus foam sponge+high rebound fabric
车体 car body	钢结构车架 + 铁壳一体冲压车身 Steel frame+iron shell integrated stamping body
车门 Door	有 have

仪表 instrument	数字显示液晶仪表 (含电压、车速、里程、灯光、前后换向等信号) Digital display LCD instrument panel (including signals such as voltage, vehicle speed, mileage, lighting, front and rear reversing, etc.)
方向盘 steering wheel	汽车方向盘 Car steering wheel
后视镜 rearview mirror	手动型外后视镜 Manual exterior rearview mirror
车身玻璃 Body glass	具有 3C 证书, 中国强制性产品认证 With 3C certificate, China Compulsory Product Certification
灯光及信号 Lights and signals	组合前灯、组合后尾灯 Combination front light, combination rear tail light
音响 sound	车载 MP3 多媒体一体机、倒车影像、专业扬声器 Car mounted MP3 multimedia all-in-one machine, reverse camera, professional speaker
线束 Wire harness	国标防水阻燃线束 + 汽车保险盒系统 National standard waterproof and flame-retardant wire harness+automotive fuse box system
顶拉手 Top handle	标配 Standard configuration
警灯 Warning lights	LED 高效爆闪警用灯 LED high-efficiency explosive flashing alarm light
动力传动系统 Power transmission system	无级变速系统带爬坡功能 Continuously variable transmission system with hill climbing function
转向系统 steering system	齿轮齿条式方向机 Rack and pinion steering gear
前后桥及悬挂 Front and rear axles and suspension	麦弗逊独立悬挂 / 后桥半浮式悬挂系统 MacPherson independent suspension/Front and rear semi floating suspension systems
制动系统 braking system	前碟后鼓制动器, 双回路液压制动 Front disc and rear drum brakes, dual circuit hydraulic braking
轮胎 tyre	公路专用轮胎 155-65R13、铝轮毂 155-65R13 highway tires, aluminum wheels





Patrol Car Hummer Style

8 seaters convertible

Applicable to patrol officers in:

- > the city, district, street, citymanagement
- >enterprise agglomerationmanagement
- >area,parks,entertainmentvenues,
- >hospitals, airports, yards andheads,
- > gardens and forests, neighborhoods, property
- >etc.,

YLEVL-PHC8-1



Parameters

电机 electrical machinery	4kw/5kw /7.5kw 交流电机 AC motor
外型尺寸（不含后视镜） External dimensions (excluding rearview mirrors)	3930mm×1500mm×1920mm (不含警灯 excluding alarm lights)
总质量 Total mass	1300kg
整备质量 curb weight	780kg
最大载重 maximum payload	520kg
额定载客 Rated passenger capacity	8 人
总电压 Total voltage	60V/72V
底盘 chassis	高强度方管焊接结构，防锈烤漆处理 High strength square tube welding structure, rust proof paint treatment
制动系统 braking system	双油管路，前碟后鼓式制动，刹车助力 Dual oil pipeline, front and rear drum brakes, brake assist
悬挂系统 Suspension system	前液压大簧式减振器，后板簧加双向阻尼 Front hydraulic large spring shock absorber, rear plate spring with bidirectional damping

转向系统 steering system	机械齿条式 Mechanical rack type
最大速度 Maximum speed	30km/h
续行里程 Continued mileage	80-120km
爬坡能力(满载) Limp climbing ability (fully loaded)	20%
轴距 Wheelbase	2800mm
前轮距 Front track width	1295mm
后轮距 Rear track width	1240mm
转弯半径 Turning radius	≤ 4.8m
最小离地间隙 Minimum ground clearance	200mm
制动距离 braking distance	≤ 4.8m
轮胎 tyre	185/70R13 子午线轮胎 185/70R13 radial tire





Patrol Car Hummer Style

5 seaters

Applicable to patrol officers in:

- > the city, district, street, citymanagement
- >enterprise agglomerationmanagement
- >area,parks,entertainmentvenues,
- >hospitals, airports, yards andheads,
- > gardens and forests, neighborhoods, property
- >etc.,

YLEVL-PH5-1



Parameters

电机 electrical machinery	4kw/5kw/7.5kw 交流 AC
外型尺寸 (不含后视镜) External dimensions (excluding rearview mirrors)	3180 × 1480 × 1960
总质量 Total mass	1148KG
整备质量 curb weight	748KG
最大载重 maximum payload	400KG
额定载客 Rated passenger capacity	5 人
总电压 Total voltage	60v/72v
底盘 chassis	高强度方管焊接结构, 防锈烤漆处理 High strength square tube welding structure, rust proof paint treatment
制动系统 braking system	双油管路, 前碟后鼓式制动, 刹车助力 Dual oil pipeline, front and rear drum brakes, brake assist
悬挂系统 Suspension system	前液压大簧式减振器, 后板簧加双向阻尼 Front hydraulic large spring shock absorber, rear plate spring with bidirectional damping

转向系统 steering system	机械齿条式 Mechanical rack type
最大速度 Maximum speed	29KM/H
续行里程 Continued mileage	80-120KM
爬坡能力(满载)Limp climbing ability (fully loaded)	20%
轴距 Wheelbase	2010MM
前轮距 Front track width	1270MM
后轮距 Rear track width	1240MM
转弯半径 Turning radius	≤ 4.6M
最小离地间隙 Minimum ground clearance	170mm
制动距离 braking distance	≤ 4.8M
轮胎 tyre	185/70R13 子午线轮胎 185/70R13 radial tire





Patrol Car Hummer Style

5 seaters with dump

YLEVL-PH5-dump

Applicable to patrol officers in:

- > the city, district, street, citymanagement
- >enterprise agglomerationmanagement
- >area,parks,entertainmentvenues,
- >hospitals, airports, yards andheads,
- > gardens and forests, neighborhoods, property
- >etc.,



Parameters

电控 Electric control	全智能电控 fully intelligent electronic control
电压 voltage	48v/60v/72v
电机 electrical machinery	3.5kw/4kw/5kw 交流异步电机 ac asynchronous motor
充电机 Charger	内置智能控制 Built in intelligent control
充电时间 Charging time	8-10 小时 hours
座椅 seat	整体式海绵外包皮革可调节座椅 Integral sponge wrapped leather adjustable seat
车体 car body	冲压, 铁质外壳, 电泳防腐处理 Stamped, iron shell, electrophoretic anti-corrosion treatment
仪表台 Instrument panel	仪表, 聚氨酯方向盘 Instrument panel, polyurethane steering wheel
音响 sound	仪表倒车影像一体机 Integrated instrument reverse camera
车架 frame	微型汽车底盘, 高强度钢结构件 Micro car chassis, high-strength steel structural components
后视镜 rearview mirror	左右各一手动型外后视镜 One manual exterior rearview mirror on each side
灯光及信号 Lights and signals	远 / 近光灯、前后转向灯、制动灯、倒车灯、电喇叭 (可选装警灯喊话器) High/low beam headlights, front and rear turn signals, brake lightsReversing lights, electric horn (optional with alarm light speaker)
转向系统 steering system	双球头双输出齿条转向器 (可选装方向助力) Independent suspension, coil spring+cylindrical hydraulic shock absorber
前悬架系统 Front suspension system	独立悬挂, 螺旋弹簧+筒式液压减震 Independent suspension, coil spring+cylindrical hydraulic shock absorber
后桥及悬挂 Rear axle and suspension	整体式后桥, 钢板弹簧悬挂 Integrated rear axle with steel plate spring suspension

制动系统 braking system	前碟后鼓式液压制动, 电子刹车助力系统 Front disc and rear drum hydraulic braking, electronic brake assist system
轮胎 tyre	185/70R13 真空胎 vacuum tire
额定乘员 Allowable passenger	5 人
外形尺寸长 * 宽 * 高 Overall dimensions: length * width * height	约 3980 × 1480 × 1960mm
整车装备质量 Vehicle equipment quality	858kg
Vehicle load 整车载荷	580kg
Front and rear track width 前后轮距	1270-1240mm
轴距 Wheelbase	2810mm
最小离地间隙 Minimum ground clearance	170mm
制动距离 braking distance	≤ 5.0m
充电输入电压 Charging input voltage	220v
最大行驶速度 Maximum driving speed	25-29km/h
续驶里程 Driving range	80-100Km
最大爬坡度 Maximum Climbing Slope	20%
最小转弯半径 Minimum turning radius	≤ 5.6m
后斗外部尺寸长 * 宽 * External dimensions of rear bucket length * width * height	1260mm × 1360mm × 300mm





Mini Bus 8 seaters

YULONG electric sightseeing minibus is customized and developed for tourist attractions, parks, large playgrounds, large buildings, resorts, schools, airports, piers and etc.

YLEVL-MB8-1



Parameters

外型尺寸: 长 × 宽 × 高 long × wide × high	3920*1550*2020mm
最高车速 (满载) Maximum speed (fully loaded)	30km/h
最大爬坡度 (满载) Maximum Climbing Slope (Full Load)	25%
续航里程 (空车) Range (empty)	≥ 80km
最小离地间隙 Minimum ground clearance	200mm
整车整备质量 Vehicle curb weight	820kg
额定载人 Rated passenger capacity	8 人
最小转弯半径 Minimum turning radius	6m
制动距离 braking distance	≤ 5m
轴距 (mm)Wheelbase (mm)	2095
轮距前后 (mm) Track width front and rear (mm)	1420*1430*2200
蓄电池 storage battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
充电机 Charger	内置防水车载式智能化充电机 Built in waterproof car mounted intelligent charger
控制器 controller	英博尔全智能电控 Inbor fully intelligent electronic control
电机 electrical machinery	4kw/5kw /7.5kw 德普达交流电机 Depda AC motor
动力传动系统 Power transmission system	无极变速系统 Depda AC motor 5KW

转向系统 steering system	齿轮齿条式方向机, 带方向助力 Rack and pinion steering gear with directional assistance
前桥及悬挂 Front axle and suspension	独立悬挂 Independent suspension
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	液压制动器、双回路液压制动、驻车制动装置 Hydraulic brake, dual circuit hydraulic brake, parking brake device
轮胎 tyre	155R12 真空子午轮胎 Vacuum radial tire
油漆 paint	汽车金属漆 Automotive metallic paint
车架 + 车身 Frame+body	钢制车架 + 金属车身 Steel frame+metal body
车门 Door	金属材质 Metal material
灯光及信号 Lights and signals	组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 Combination front lights, turn signal lights, combination rear tail lights, brake lights, electric horn
前挡玻璃 Front windshield	钢化玻璃 Tempered glass
座椅 seat	高级仿真皮革座椅 Advanced simulation leather seats
仪表 instrument	仪表显示 / 含电压 Instrument display/voltage included
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
方向盘 steering wheel	36CM 方向盘 36CM steering wheel





Mini Bus 11 seaters

Enclosed type with Glass Doors

YULONG electric sightseeing minibus is customized and developed for tourist attractions, parks, large playgrounds, large buildings, resorts, schools, airports, piers and etc.

YLEVL-MB11-1



Parameters

外型尺寸: 长 × 宽 × 高 long × wide × high	4530*1500*2080mm
最高车速 (满载) Maximum speed (fully loaded)	30km/h
最大爬坡度 (满载) Maximum Climbing Slope (Full Load)	25%
续航里程 (空车) Range (empty)	≥ 80km
最小离地间隙 Minimum ground clearance	200mm
整车整备质量 Vehicle curb weight	930kg
额定载人 Rated passenger capacity	8-11 人
最小转弯半径 Minimum turning radius	6m
制动距离 braking distance	≤ 5m
轴距 (mm)Wheelbase (mm)	2095
轮距前后 (mm) Track width front and rear (mm)	1290/1285
蓄电池 storage battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
充电机 Charger	内置防水车载式智能化充电机 Built in waterproof car mounted intelligent charger
控制器 controller	英博尔全智能电控 Inbor fully intelligent electronic control
电机 electrical machinery	4kw/5kw /7.5kw 德普达交流电机 Depda AC motor
动力传动系统 Power transmission system	无极变速系统 Depda AC motor

转向系统 steering system	齿轮齿条式方向机, 带方向助力 Rack and pinion steering gear with directional assistance
前桥及悬挂 Front axle and suspension	独立悬挂 Independent suspension
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	液压制动器、双回路液压制动、驻车制动装置 Hydraulic brake, dual circuit hydraulic brake, parking brake device
轮胎 tyre	155R12 真空子午轮胎 Vacuum radial tire
油漆 paint	汽车金属漆 Automotive metallic paint
车架 + 车身 Frame+body	钢制车架 + 金属车身 Steel frame+metal body
车门 Door	金属材质 Metal material
灯光及信号 Lights and signals	组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 Combination front lights, turn signal lights, combination rear tail lights, brake lights, electric horn
前挡玻璃 Front windshield	钢化玻璃 Tempered glass
座椅 seat	高级仿真皮革座椅 Advanced simulation leather seats
仪表 instrument	仪表显示 / 含电压 Instrument display/voltage included
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
方向盘 steering wheel	36CM 方向盘 36CM steering wheel





MiniBus 11 seaters

Enclosed type with Doors

YULONG electric sightseeing minibus is customized and developed for tourist attractions, parks, large playgrounds, large buildings, resorts, schools, airports, piers and etc.

YLEVL-MB11-2



Parameters

外型尺寸: 长 × 宽 × 高 long × wide × high	4530*1500*2080mm
最高车速 (满载) Maximum speed (fully loaded)	30km/h
最大爬坡度 (满载) Maximum Climbing Slope (Full Load)	25%
续航里程 (空车) Range (empty)	≥ 80km
最小离地间隙 Minimum ground clearance	200mm
整车整备质量 Vehicle curb weight	930kg
额定载人 Rated passenger capacity	8-11 人
最小转弯半径 Minimum turning radius	6m
制动距离 braking distance	≤ 5m
轴距 (mm)Wheelbase (mm)	2095
轮距前后 (mm) Track width front and rear (mm)	1290/1285
蓄电池 storage battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
充电机 Charger	内置防水车载式智能化充电机 Built in waterproof car mounted intelligent charger
控制器 controller	英博尔全智能电控 Inbor fully intelligent electronic control
电机 electrical machinery	4kw/5kw /7.5kw 德普达交流电机 Depda AC motor

动力传动系统 Power transmission system	无极变速系统 Depda AC motor
转向系统 steering system	齿轮齿条式方向机, 带方向助力 Rack and pinion steering gear with directional assistance
前桥及悬挂 Front axle and suspension	独立悬挂 Independent suspension
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	液压制动器、双回路液压制动、驻车制动装置 Hydraulic brake, dual circuit hydraulic brake, parking brake device
轮胎 tyre	155R12 真空子午轮胎 Vacuum radial tire
油漆 paint	汽车金属漆 Automotive metallic paint
车架 + 车身 Frame+body	钢制车架 + 金属车身 Steel frame+metal body
车门 Door	金属材料 Metal material
灯光及信号 Lights and signals	组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 Combination front lights, turn signal lights, combination rear tail lights, brake lights, electric horn
前挡玻璃 Front windshield	钢化玻璃 Tempered glass
座椅 seat	高级仿真皮革座椅 Advanced simulation leather seats
仪表 instrument	仪表显示 / 含电压 Instrument display/voltage included
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
方向盘 steering wheel	36CM 方向盘 36CM steering wheel





MiniBus Truck

YULONG electric sightseeing minibus is customized and developed for tourist attractions, parks, large playgrounds, large buildings, resorts, schools, airports, piers and etc.

YLEVL-MBT-1



Parameters

外型尺寸: 长 × 宽 × 高 long × wide × high	3920*1550*2020mm(货斗 Cargo hopper2860*1440*350)
最高车速 (满载) Maximum speed (fully loaded)	30km/h
最大爬坡度 (满载) Maximum Climbing Slope (Full Load)	25%
续航里程 (空车) Range (empty)	≥ 80km
最小离地间隙 Minimum ground clearance	200mm
整车整备质量 Vehicle curb weight	820kg
额定载人 Rated passenger capacity	2 人
最小转弯半径 Minimum turning radius	6m
制动距离 braking distance	≤ 5m
轴距 (mm)Wheelbase (mm)	2095
轮距前后 (mm) Track width front and rear (mm)	1420*1430*2200
蓄电池 storage battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
充电机 Charger	内置防水车载式智能化充电机 Built in waterproof car mounted intelligent charger
控制器 controller	48v/60v/72v- 英博尔全智能电控 Inbor fully intelligent electronic control
电机 electrical machinery	4kw/5kw /7.5kw 德普达交流电机 Depda AC motor
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system

转向系统 steering system	齿轮齿条式方向机, 带方向助力 Rack and pinion steering gear with directional assistance
前桥及悬挂 Front axle and suspension	独立悬挂 Independent suspension
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	液压制动器、双回路液压制动、驻车制动装置 Hydraulic brake, dual circuit hydraulic brake, parking brake device
轮胎 tyre	155R12 真空子午轮胎 Vacuum radial tire
油漆 paint	汽车金属漆 Automotive metallic paint
车架 + 车身 Frame+body	钢制车架 + 金属车身 Steel frame+metal body
车门 Door	金属材质 Metal material
灯光及信号 Lights and signals	组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 Combination front lights, turn signal lights, combination rear tail lights, brake lights, electric horn
前挡玻璃 Front windshield	钢化玻璃 Tempered glass
座椅 seat	高级仿真皮革座椅 Advanced simulation leather seats
仪表 instrument	仪表显示 / 含电压 Instrument display/voltage included
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
方向盘 steering wheel	36CM 方向盘 36CM steering wheel





MiniBus Ambulance

Enclosed type

YULONG electric sightseeing minibus is customized and developed for tourist attractions, parks, large playgrounds, large buildings, resorts, schools, airports, piers and etc.

YLEVL-MBA-1



Parameters

外型尺寸: 长 × 宽 × 高 long × wide × high	3920*1550*2020mm
最高车速 (满载) Maximum speed (fully loaded)	30km/h
最大爬坡度 (满载) Maximum Climbing Slope (Full Load)	25%
续航里程 (空车) Range (empty)	≥ 80km
最小离地间隙 Minimum ground clearance	200mm
整车整备质量 Vehicle curb weight	820kg
额定载人 Rated passenger capacity	2 人
最小转弯半径 Minimum turning radius	6m
制动距离 braking distance	≤ 5m
轴距 (mm)Wheelbase (mm)	2095
轮距前后 (mm) Track width front and rear (mm)	1420*1430*2200
蓄电池 storage battery	免维护电池 / 锂电池 maintenance free battery/lithium battery
充电机 Charger	内置防水车载式智能化充电机 Built in waterproof car mounted intelligent charger
控制器 controller	48v/60v/72v- 英博尔全智能电控 Inbor fully intelligent electronic control
电机 electrical machinery	4kw/5kw /7.5kw 德普达交流电机 Depda AC motor
动力传动系统 Power transmission system	无极变速系统 Continuously variable speed system

转向系统 steering system	齿轮齿条式方向机, 带方向助力 Rack and pinion steering gear with directional assistance
前桥及悬挂 Front axle and suspension	独立悬挂 Independent suspension
后桥及悬挂 Rear axle and suspension	整体式后桥 + 高强度钢板弹簧 + 筒式液压减震 Integrated rear axle+high-strength steel plate spring+cylindrical hydraulic shock absorber
制动系统 braking system	液压制动器、双回路液压制动、驻车制动装置 Hydraulic brake, dual circuit hydraulic brake, parking brake device
轮胎 tyre	155R12 真空子午轮胎 Vacuum radial tire
油漆 paint	汽车金属漆 Automotive metallic paint
车架 + 车身 Frame+body	钢制车架 + 金属车身 Steel frame+metal body
车门 Door	金属材质 Metal material
灯光及信号 Lights and signals	组合前灯、转向灯、组合后尾灯、制动灯、电喇叭 Combination front lights, turn signal lights, combination rear tail lights, brake lights, electric horn
前挡玻璃 Front windshield	钢化玻璃 Tempered glass
座椅 seat	高级仿真皮革座椅 Advanced simulation leather seats
仪表 instrument	仪表显示 / 含电压 Instrument display/voltage included
开关 switch	启动开关、灯光、进退档位开关 Start switch, light, forward/backward gear switch
方向盘 steering wheel	36CM 方向盘 36CM steering wheel
空调 air-conditioning	冷暖 Cold and warm





MiniBus Fire Truck

YULONG fire truck is suitable for logistics parks, communities, factories, schools, gardens and so on. The vehicle is equipped with high-pressure water pumps, fire axes, fire tongs, fire hammers, fire extinguishers and other fire-fighting tools.

YLEVL-MBF-1



Parameters

封闭式驾驶舱乘员数 :2 人
Closed cockpit passenger count: 2 people

外形尺寸 Overall dimensions (mm) :
3950*1550*2100

续航里程 Driving range (km) : 60-80

最高车速 maximum speed (km/h) : 30

最小转弯半径 minimum turning radius (m) :
3.5

最大爬坡度 Max Gradeability (%) : 20

电池 battery:12V100AH6 块

电机 electrical machinery:4kw

充电机 : 全智能充电器
Charger: fully intelligent charger

整车重量 Vehicle weight (kg) : 1150

制动距离 braking distance (m) : 4.2

最大噪音 Maximum noise (db) A: 65

充电电压 Charging Voltage (v) : 220

充电时间 charging time (h) : 6-8

离地间隙 Ground clearance (mm) : 180

车身材质 : 复合材料加钣金
Ground clearance body material: composite material with sheet metal

座椅采用高级仿皮坐垫可折叠扶手 The seats are equipped with advanced faux leather cushions and foldable armrests

仪表电流表、电量显示、转向指示、前后指示、并提供 12V 充电接口
Instrument ammeter, battery display, steering indicator, front and rear indicator, and provide a 12V charging interface

制动系统鼓式双回路液压制动 Brake system drum dual circuit hydraulic braking

前桥麦佛逊独立悬挂、后桥钢板弹簧
Front axle MacPherson independent suspension, rear axle steel plate spring

速度控制系统无级变速 Speed control system continuously variable speed

灯光及信号前照灯、转向灯、刹车灯、驻车灯、汽车喇叭、顶部带警灯 Lighting and signal headlights, turn signals, brake lights, parking lights, car horns, top mounted warning lights

轮胎为汽车轮胎及便携式传名 SMAPART160 升充气泵和维修工具
The tire is a car tire and a portable named SMAPART160 liter inflation pump and maintenance tool

汽油泵参数: 扬程 30 米, 吸水扬程 7 米, 流量 600L/MIN, 发动机 MZ125/ 四冲程 /OHV, 额定功率 2.2KW, 油箱容积 4.5L 等 Gasoline pump parameters: head 30 meters, suction head 7 meters, flow rate 600L/MIN, engine MZ125/four stroke/OHV, rated power 2.2KW, fuel tank volume 4.5L, etc

附件: 砂石过滤器、喉箍、火花塞套筒
Attachment: Sand and gravel filter, hose clamp, spark plug sleeve





Customized Carts and Parts





Moments of Delivery

