



## Provide One-stop Intelligent Packaging Solutions

Quality, Integrity, Innovation, Win-win

### Product Range:

Fully Automatic Quantitative Bagging Machine,  
Vacuum Packing Machine ( Pillow Shape, Brick Shape);  
Quantitative Packing Machine, Flow Scale, Blending Machine;  
Robotic Palletizing Line, Truck Loading System and  
Other Automatic Intelligent Packing Solutions.

### Zhangzhou Jialong Technology Inc.

Add.: No.13 Jinfengbei Road, Beidou Industrial Park,  
Jinfeng Development Zone, Zhangzhou, Fujian, China.

Tel: +86-596-2672993 Fax:+86-596-2672885  
Cellphone: +86-139 0606 2253

**E-mail: [export@jialong.cn](mailto:export@jialong.cn)**  
<https://www.jialongpacking.com>




**Zhangzhou Jialong Technology Inc.**

Tel: +86-596-2672993  
Cellphone: +86-139 0606 2253  
E-mail: [export@jialong.cn](mailto:export@jialong.cn)





# PROVIDE ONE-STOP INTELLIGENT PACKAGING SOLUTIONS

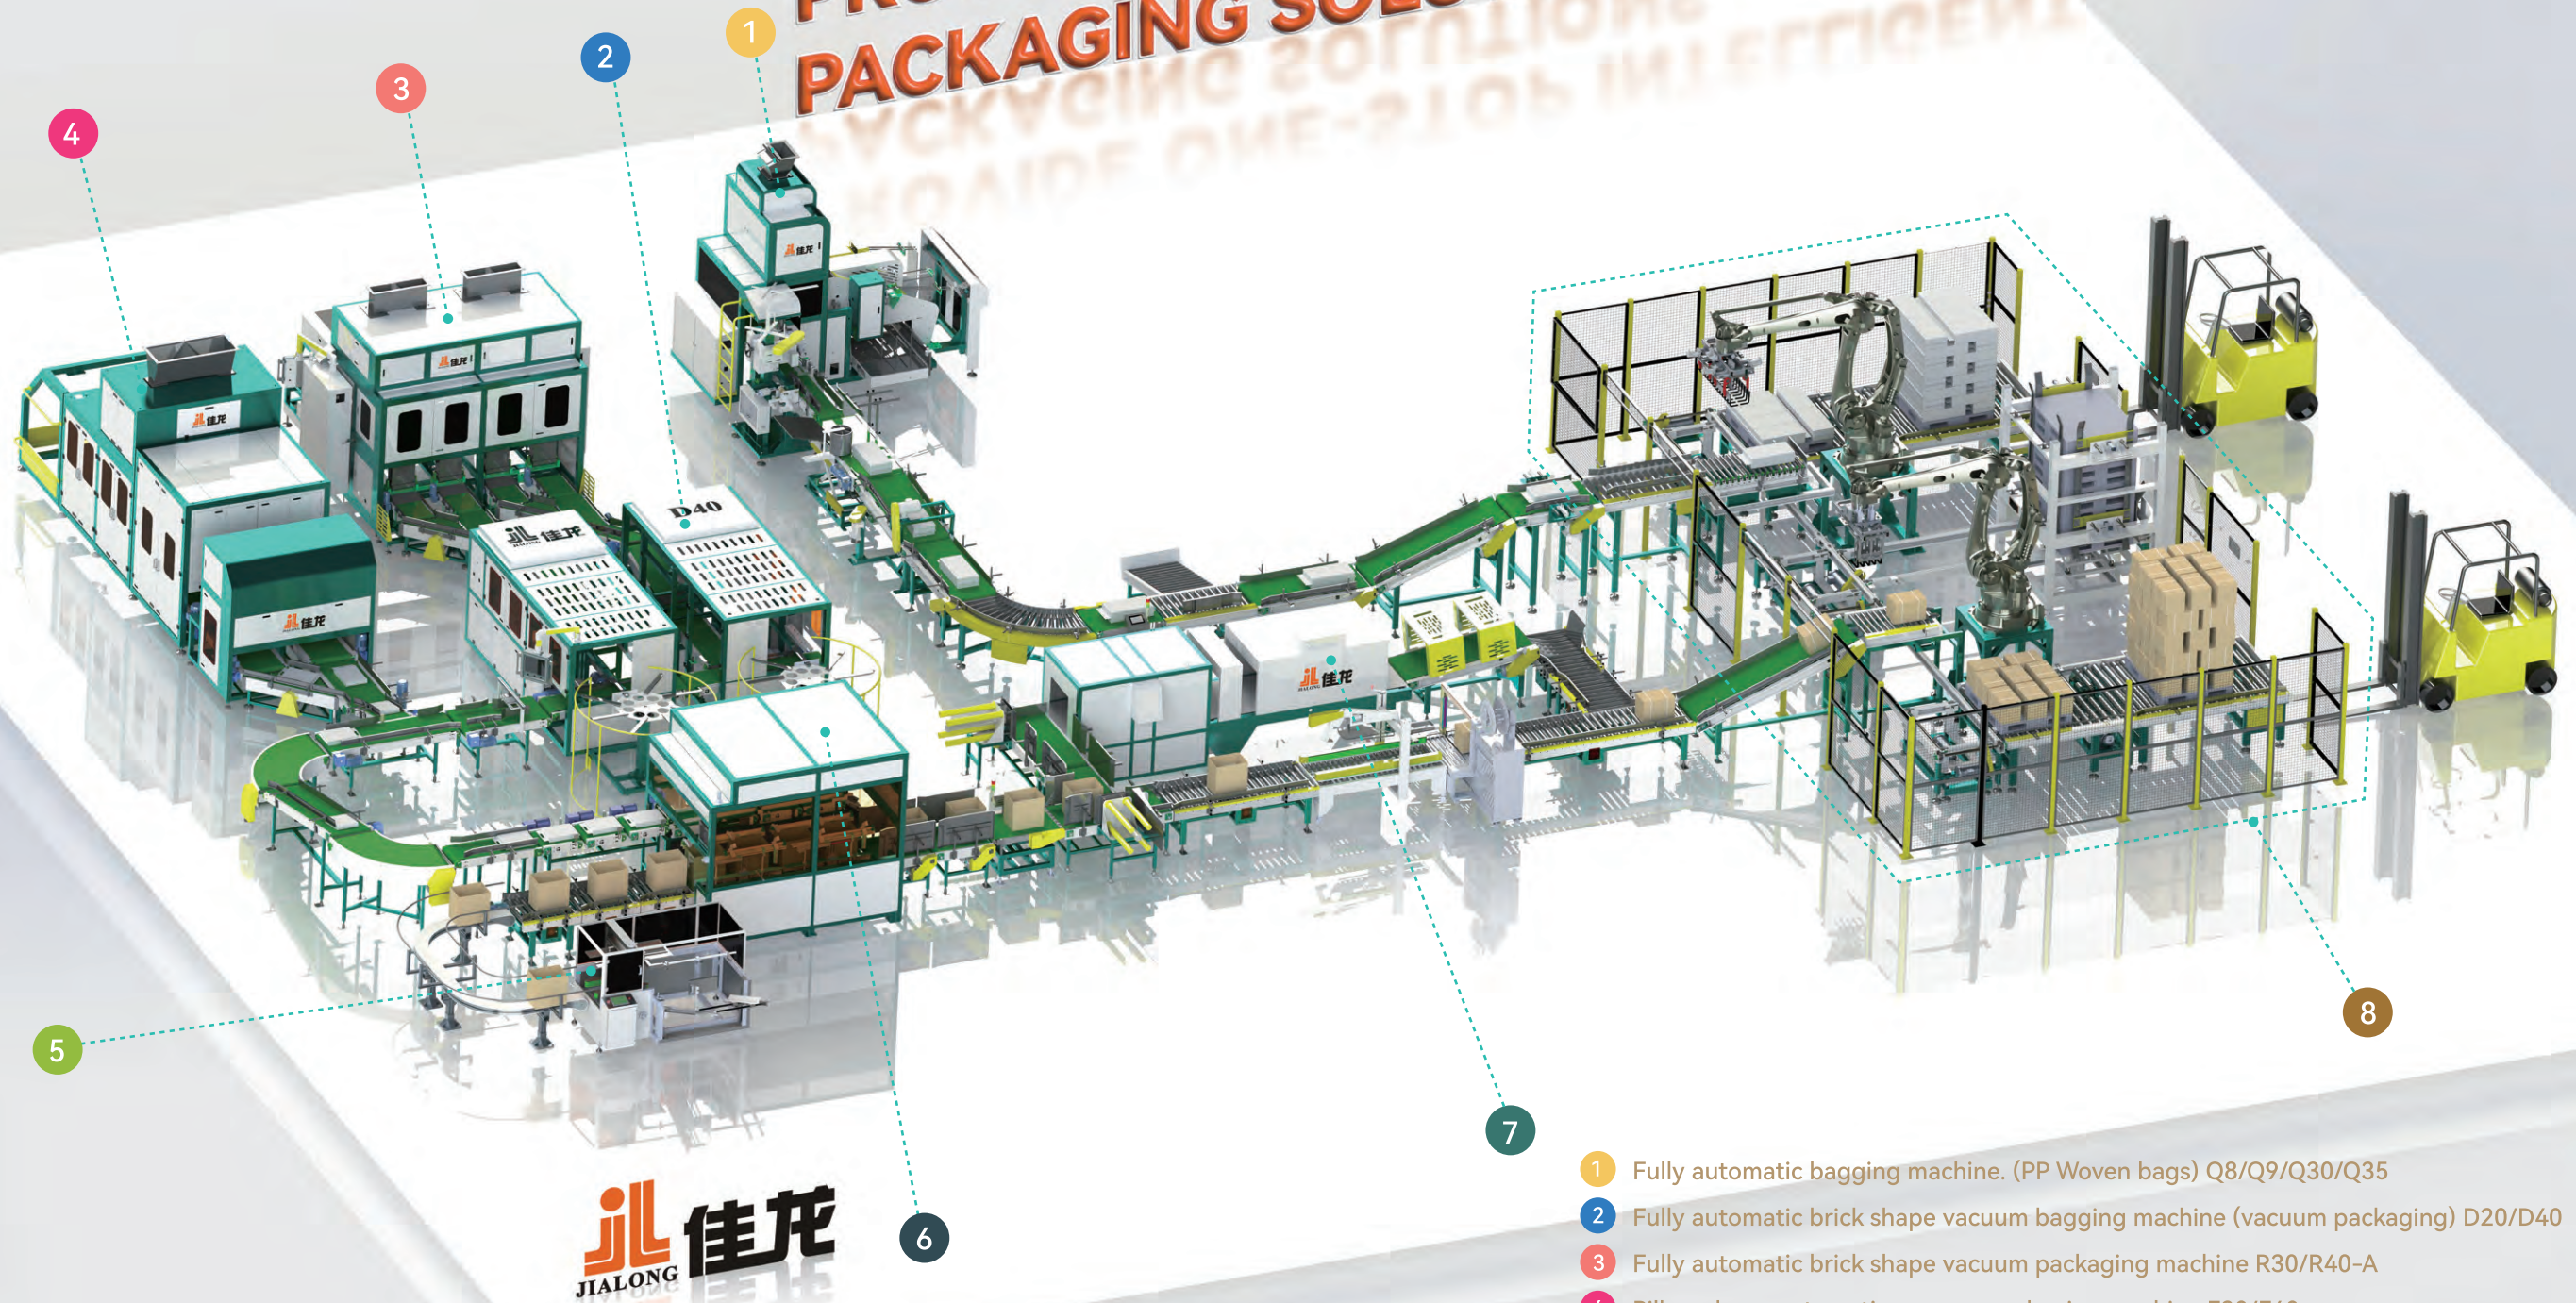

- 1 Fully automatic bagging machine. (PP Woven bags) Q8/Q9/Q30/Q35
- 2 Fully automatic brick shape vacuum bagging machine (vacuum packaging) D20/D40
- 3 Fully automatic brick shape vacuum packaging machine R30/R40-A
- 4 Pillow shape automatic vacuum packaging machine F20/F40
- 5 Fully automatic case erector
- 6 Fully automatic pillow shape vacuum case packing machine E20/E40
- 7 Automatic heat shrinking machine
- 8 Intelligent robot palletizing system



## Jialong Company Milestones:

2000

Foundation of Zhangzhou Jialong Electronic Co., Ltd.

2003

China's High- and New-Technology Enterprise (HNTE)

2004

Invented the Brick Shape Vacuum Packing Machine  
The first one of such type in Chinese Market

2005

ISO9001 Certified Company

2009

Awarded as Fujian Famous Brand

2012

Provincial Innovation and Reform Trial Company

2014

Provincial Technology & Research Center for Weighing  
and Packing Equipment

2015

Listed on The National Equities Exchange and  
Quotations (NEEQ, New Third Board)

2017

Recognized as the "Technology Little Giant" Enterprise

2018

Awarded as China's National Model Employee

2019

R&D Department Awarded as Pioneering Work Team

2021

Recognized as the Specialized and Sophisticated  
Small- and Medium-sized Enterprise

2022

The wholly owned subsidiary company Fujian Jialong  
Intelligent Co., Ltd is founded

2022

Acquired Zhangzhou Zhuangyi Industry Co. Ltd.

2024

Moved to New Factory of 66,666 m<sup>2</sup>

## Company Profile

Founded in 2000, Zhangzhou Jialong Technology Inc. (Stock Code:832394) is China's "National High-tech Enterprise" and undertakes the projects of the "China Torch Program". We are specialized in the R&D, manufacturing, and marketing automatic packing machine, bagging machine, vacuum packing machine, automatic packing solutions with self-owned intellectual property rights. "JIALONG" is the top brand in the grain and feeds packing industry. We develop multiple new products leading the market every year. All of our management is complete complying with

ISO-9001:2015. At present, 20 series of hundreds of products have been launched in the market with more than 350 patents and exported to more than 50 countries and regions.

Product Range: Fully Automatic Quantitative Bagging Machine, Vacuum Packing Machine (Pillow Shape, Brick Shape); Quantitative Packing Machine, Flow Scale, Blending Machine; Robotic Palletizing Line, Truck Loading System and Other Automatic Intelligent Packing Solutions.

2000  
FOUNDED

350+  
PATENTS

50+  
EXPORTED  
COUNTRIES





## Jialong Mission

01

Free Hands for  
Customers



02

Create  
Opportunities  
for Staff

03

Increase Value  
for  
Shareholders

## Corporate Honor

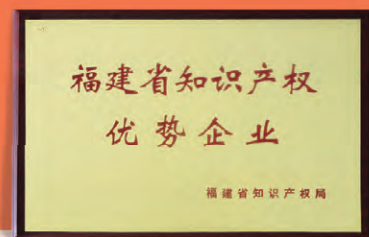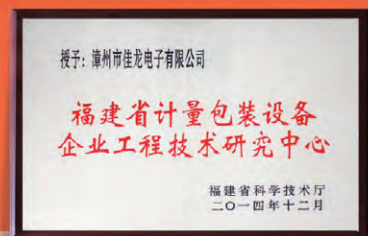

## Company Culture

### Jialong Core Values

1 Quality

2 Integrity

3 Innovation

4 Win-win







## ■ Production System

Jialong always takes the scientific and technological innovation as our driving force, pursuing excellence and providing the best quality products and services. We adheres to "quality first" production guideline and processes quality control throughout the entire process, from receiving materials inspection, production process inspection to finished product inspection. This triple inspection system is to make sure we provide high-quality products to the customers.






## ZDB-900-Q35

Fully Automatic Quantitative  
Packing Machine

Demo Video

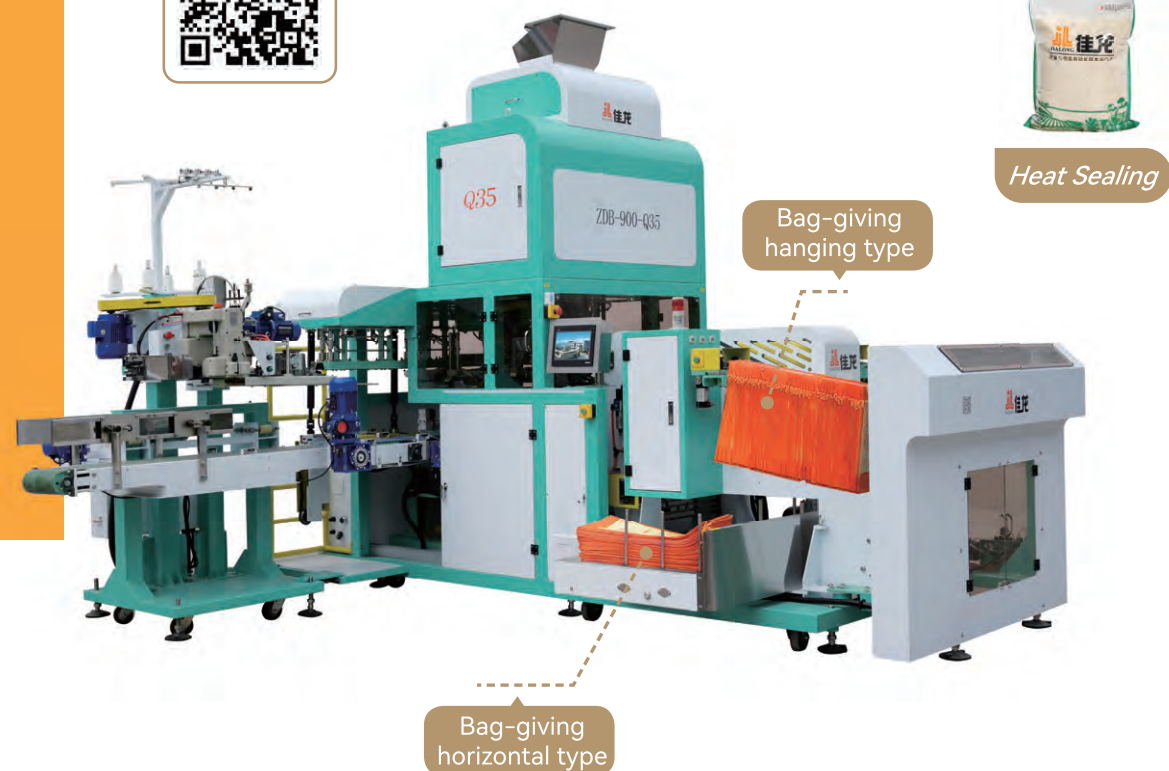

With/without Handle Bags



Sewing



Heat Sealing

## ZDB-600-Q9

Fully Automatic Quantitative  
Packing Machine

Demo Video



### Features



#### Accurate Measurement

3-loadcell structure, a  
accurate and stable



#### Automatic Folding

One-key switching for top edge  
folding function



#### Automatic Centering

automatic centering function



#### Quick Changer

One key switch for different sizes.  
Up to 60 recipes can be preset



#### Remote Service

With wireless remote service,  
Solve on-site problems for customers remotely



#### Automatic Maintenance

The whole machine is equipped with multiple  
automatic oil injection systems, minimizing  
manual intervention



#### Auto Rejection

Automatic removal of defective bags



#### Statistical Function

Real-time display of the current cumulative number of  
packages, with shift production statistics function

### Technical Parameters

Specification	ZDB-900-Q35	ZDB-900-Q30/Q8	ZDB-600-Q9
Range (kg)	5~25	5~25	25~50
Speed ( bag/h)	550~800	550~900	500~600
Bag size (mm)	L : 500~800 W : 210~380	L : 500~800 W : 210~380	L : 730~1100 W : 330~650
Bag closing way	👍👍👍 Sewing/ heat sealing	Sewing	Sewing
Applicable packaging materials and bag magazine capacity	Double-sided laminated : 200~300 pcs without handle 200 pcs with handle	Double-sided laminated : 200~300 pcs	100~300 pcs
Power consumption	380/220V 3 phase 5 wires 6KW	AC 380V 50Hz 6KW	AC 380V 50Hz 9KW
Air consumption	0.4~0.6MPa 15m <sup>3</sup> /h	0.5~0.6Mpa 15m <sup>3</sup> /h	0.5~0.6Mpa 26m <sup>3</sup> /h
Machine size L*W*H (mm)	3550×4050×3250	3550×3700×3250 3550×3300×3250	4430×3800×3950(grain version) 4430×3800×3750(rice version)

The above data are obtained by taking rice as material under specific conditions



Quantitative Packing Machine (Double Hoppers)

Moveable  
Column

PP WOVEN BAG  
PACKAGING MACHINE SERIES

DCS-25K (3A)

DCS-25K (3C)



Motor braking system/  
controllable thread length



automatic oil filling



Optional: folding machine  
or heat sealing machine

Features



Easy Changeover

automatic conveyor height adjustment  
/manual lifting conveyor



Automatic Thread Cutting

Inner Cutting Automatic Thread Cutting  
Bag Sewing Machine, Optional: sewing  
head can be moved horizontally



Branded Parts

reliable quality and long service life



Intelligent Colorful Touch Screen Display

High-definition colorful touch screen /  
high-speed intelligent instrument



DCS-5S (3A)

Technical Parameters

Specification	DCS-5S (3A)		DCS-25K (3A) / (3C)	
Range (kg)	0.5~5	5~10	5~25	>25~50
Speed ( bag/h)	700~1000	300~400	600~900	300~400
Power consumption	4N-AC 220V 50Hz 0.8KW		4N-AC 380V 50Hz 1.1KW	
Air consumption	0.4~0.6Mpa 1m³/h		0.4~0.6Mpa 2m³/h	
Machine size L*W*H (mm)	1200×800×2200		3000×1050×2700	

The above data are obtained by taking rice as material under specific conditions



DCS-50 (A3)

Quantitative Packing Machine  
(Single Hopper)

Features



High Accuracy

Gravity with vibration  
feeding High accuracy and  
stable performance



Auto Detection

Error automatic correction  
Over and under error alarm



Food Grade Material

Contacted Parts  
stainless steel



Reserve RS232/485 serial

Port to connect with  
Central control system



DCS-50 (BW3)

Quantitative Packing Machine  
(Auger Feeding)



DCS-50 (S)

Quantitative Packing Machine

Technical Parameters

Specification	DCS-50 (A3)	DCS-50S	DCS-50 (BW3)
Range (kg)	5~50	20~50	40~50
Speed ( bag/h)	300~400	500~600	100~180
Power consumption	4N-AC 380V 50Hz 1.0KW	4N-AC 220V 50Hz 1.1KW	4N-AC 380V 50Hz 4.8KW
Air consumption	0.4~0.6Mpa 1m³/h	0.4~0.6Mpa 1m³/h	0.4~0.6Mpa 1m³/h
Machine size L*W*H (mm)	2750×1050×2550	3620×1050×3110	3700×1600×2550

The above data are obtained by taking rice as material under specific conditions



**DCS-100 (A3)****Quantitative Packing Machine  
(Single Hopper)****DCS-50CS-N6****Quantitative Packing Machine  
(Double Hoppers)***OK for pellets and  
concentrated feeds***DCS-50 (A5)****Quantitative Packing Machine  
(Single Hopper)****DCS-50(SK)****Quantitative Packing Machine  
(Double Hoppers)****Technical Parameters**

Specification	DCS-100 (A3)	DCS-50CS-N6		DCS-50 (A5)	DCS-50 (SK)
Range (kg)	25~100	20~50		10~50	40~50
Packing Materials	rice beans etc.	granular materials	Concentrate materials	peanuts, seeds etc.	rice bran
Speed ( bag/h)	300~400	600~720	480~540	300~450	300~420
Power consumption	4N-AC 380V 50Hz 1.0KW		4N-AC 380V 50Hz 1.5KW	4N-AC 380V 50Hz 1.0KW	
Air consumption	0.4~0.6MPa 2m <sup>3</sup> /h	0.4~0.6MPa 1.5m <sup>3</sup> /h		0.4~0.6MPa 1m <sup>3</sup> /h	0.4~0.6MPa 1m <sup>3</sup> /h
Machine size L*W*H (mm)	3500×1100×2800	1500×1100×3500		1265×1035×2900	3410×1115×3935

The above data are obtained by taking rice as material under specific conditions

## Ton Bag Packing Scale

### Scope of application

Quantitative packaging  
of large-capacity and  
quantitative packaging of  
small particle materials



### Features

**Accurate Weighing**

gravity feeding mechanism,  
stable performance

**Easy to Operate**

automatic bag release  
mechanism  
sealed bag-clamping

**food grade material**

Parts in contact with the  
material are made of  
stainless steel,  
long service life

**data transmission**

Reserved RS232/485  
serial port, Can connect  
with the communication  
management system

**Technical Parameters**


Specification	LCS-60T (C/Q1) Granule	LCS-60T (C/Q2) Powder
Range (kg)	500~1000	500~1000
Speed ( bag/h)	25~50	15~25
Power consumption	0.4~0.6MPa 1m <sup>3</sup> /h	0.4~0.6MPa 1m <sup>3</sup> /h
Air consumption	AC 380V 50Hz 1.2kW	AC 380V 50Hz 2.8kW
Height (mm)	3800	4200

The above data are obtained from testing under specific conditions



Quantitative Packing Machine  
(Double Working Stations)

*This packing machine is specially designed for powder materials like wheat flour,gram flour,rice bran etc.*

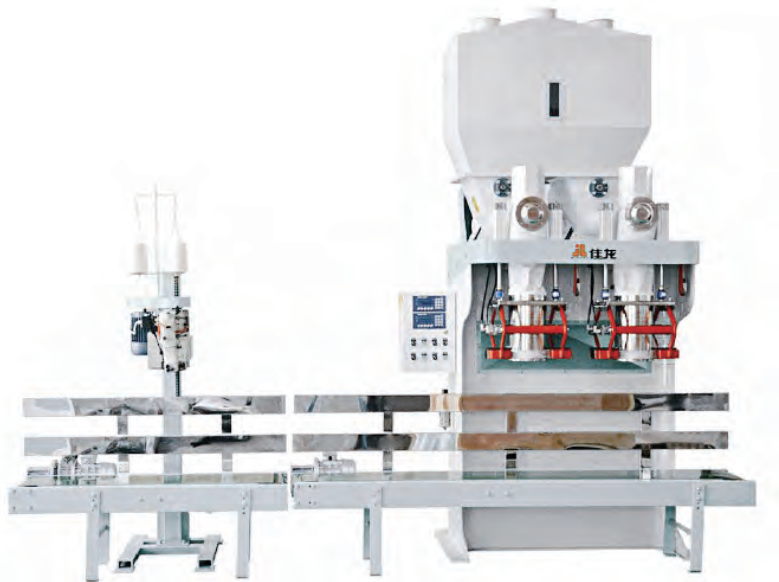

Technical Parameters			
Model	DCS-25K (L1D)	DCS-25K (L3D)	DCS-50 (L2D)
Range(kg)	2.5~10	10~25	25~50
Speed (bags/h)	450~500	350~400	300~350
Accuracy Grade	0.2%	0.2%	0.2%
Air, air expenditure	0.4~0.6MPa 1m³/h	0.4~0.6MPa 1m³/h	0.4~0.6MPa 1m³/h

The above data are obtained from testing under specific conditions

Quantitative Packing Machine  
(Single Working Station)

The working process is as follows:

- 1) Manually placing the bag on the clamping and holding device of the packing machine;
- 2) Net Weight Auger Filler Filling & Weighing untill to the weight of the target
- 3) Conveying to next step to close the bag by sewing or heat sealing



Technical Parameters			
Model	DCS-25K (L1)	DCS-25K (L3)	DCS-50 (L2)
Range(kg)	2.5~10	10~25	25~50
Speed (bags/h)	250~300	250~280	150~160
Accuracy Grade	0.2%	0.2%	0.2%
Air, air expenditure	0.4~0.6MPa 1m³/h	0.4~0.6MPa 1m³/h	0.4~0.6MPa 1m³/h

The above data are obtained from testing under specific conditions

DCS-50(CS/N10)

Quantitative Packing Machine  
(Double Hoppers)



DCS-50 (V10)

Quantitative Packing Machine  
(Double Hoppers)



Technical Parameters			
Model	DCS-50 (CS/N10)		DCS-50 (V10)
Range(kg)	20~50		20~50
Material Type	granular materials	Concentrate materials	granular materials
Speed (bags/h)	600~720	480~540	400~500
Air, air expenditure	0.4~0.6MPa 4.5m³/h		0.4~0.6MPa 6m³/h
Machine size L*W*H (mm)	3700x1250x3900		3790x1700x3350

The above data are obtained from testing under specific conditions



PZB-1200-F40

PZB-600-F20

Fully Automatic Flat Shape  
Vacuum Packing Machine

Demo Video

10101  
10101

Dual use in  
one machine

switch  
freely

modular  
design

Optional

Secondary  
shaping machine

Technical Parameters		
Specification	PZB-1200-F40	PZB-600-F20
Range (kg)	2~10	2~10
Speed ( bag/h)	800~1000	400~500
Power consumption	4N-AC 380V 50Hz 14kw	4N-AC 380V 50Hz 11kw
Air consumption	(0.5~0.6)MPa 100m³/h	(0.5~0.6)MPa 50m³/h
Machine size L*W*H (mm)	5700×2300×3100	5700×1600×2700

The above data are obtained by taking rice as material under specific conditions

PZB-500-F5

PZB-200-F1

Double Working Stations Flat Shape  
Vacuum Packing Machine

Single Working Station Flat Shape  
Vacuum Packing Machine

Features

Adaptive Adjustment

Automatic setting of control parameters and automatic correction of errors

Perfect Shape

The program can be adjusted for secondary shaping, Make the shape more perfect.

Independent Operation

The two stations can work independently, Make two specifications at the same time

Intelligent Screen Display

Omron touch screen and PLC centralized control, Real-timetracking system.

Data Transmission

Reserved RS232/485 serial port, Can carry out data communication with the central control system

Temperature Control

The control system is applicable to all kinds of packaging bags

Technical Parameters			
Specification	PZB-700-F5/S	PZB-500-F5	PZB-200-F1
Range (kg)	1~10	1~10	1~10
Speed ( bag/h)	550~700	360~500	180~250
Power consumption	4N-AC 380V 50Hz 7.6KW	4N-AC 380V 50Hz 3.3KW	4N-AC 380v 50Hz 2kw
Air consumption	0.4~0.6Mpa 22m³/h	0.5~0.6Mpa 25m³/h	0.4~0.6Mpa 13m³/h
Machine size L*W*H (mm)	2400×2450×2800	1850×2050×2500	1250×1510×2300

The above data are obtained by taking rice as material under specific conditions



LZB-1200-R40/A

Fully Automatic Brick Shape  
Vacuum Packing Machine  
four working stations



LZB-600-R30

Fully Automatic Brick Shape  
Vacuum Packing Machine  
double stations



Demo Video



LZB-300-R5

Brick Shape Vacuum Packaging  
Machine - single station



LZB-1000-R20

Brick Shape Vacuum Packaging  
Machine - double stations



Demo Video



LZB-1200-R40/S

Brick Shape Vacuum  
Packaging Machine

Features



Adaptive Adjustment

Automatic correction and  
adaptation to weighing different  
specifications and materials



Easy Changover

Changing molds is quick  
and easy without any tools



Intelligent Screen Display

Omron touch screen and PLC  
centralized control, Real-time  
tracking system.



Automatic Detection

The equipment has a self-test  
function to automatically  
troubleshoot and easy maintenance



Data Transmission

Reserved RS232/485 serial  
port Data communication  
with central control system



High Grade Configuration

German vacuum pump , famous  
parts make Stable and reliable  
operation and long service life

Technical Parameters			
Specification	LZB-1200-R40/A	LZB-600-R30	LZD-1200-D40
Range (kg)	0.35~5	0.5~5	2.5~5
Speed ( bag/h)	1000~1200 🍑🍑🍑	500~600	1000~1200
Power consumption	4N-AC 380V 50Hz 13.5KW	4N-AC 380V 50Hz 5.2KW	4N-AC 380V 50Hz 7.5 KW
Air consumption	0.5~0.6MPa 40m³/h	0.5~0.6Mpa 30m³/h	0.5~0.6MPa 35m³/h
Machine size L*W*H (mm)	3200×3650×2800	3050×2700×2800	5450x5350x1900

The above data are obtained by taking rice as material under specific conditions

Technical Parameters			
Specification	LZB-300-R5	LZB-1200-R40/S	LZB-1000-R20
Range (kg)	0.35~5	0.35~5	0.5~5
Speed ( bag/h)	300~360	1000~1200 🍑🍑🍑	600~1000
Power consumption	4N-AC 380V 50Hz 4.0KW	4N-AC 380V 50Hz 11KW	4N-AC 380V 50Hz 5.5KW
Air consumption	0.4~0.6MPa 9m³/h	0.5~0.6MPa 30m³/h	0.5~0.6MPa 18m³/h
Machine size L*W*H (mm)	1900×2050×2500	3160×2350×2760	2300×2700×2800

The above data are obtained by taking rice as material under specific conditions



## LZB-150-M3/S

### Big Package Brick Shape Vacuum Packing Machine



Pillow shape vacuum packing



brick shape vacuum packing

#### Demo Video



## LZB-500-FR10

## LZB-300-FR15

### Flat Shape & Brick Shape Vacuum Packing Machine (Two in one)



**Note:**  
Two stations  
Can work at  
same time

#### Features



##### Intelligent Colorful Touch Screen Display

Using touch screen instrument  
Omron PLC centralized control  
Real-time tracking system working status



##### Quick Changerover

easy to change the mold for different  
packaging specification



##### Adaptive Adjustment

High-speed weighing control mode,  
parameter automatic correction



##### Automatic Detection

The device has a self-test function  
automatic troubleshooting, simple and  
convenient maintenance



##### Data Transmission

Reserved RS232/485 serial port ,  
Can carry out data communication  
with the central control system



##### High-end Configuration

Stable and reliable work,  
long lasting

#### Technical Parameters

Specification	LZB-150-M3/S
Range (kg)	10~25
Speed ( bag/h)	140~160
Power consumption	AC 380V 50Hz 5KW
Air consumption	0.4~0.6Mpa 20m <sup>3</sup> /h
Machine size L*W*H (mm)	2950×1380×3000

The above data are obtained from testing under specific conditions

#### Features



##### Adaptive Adjustment

High-speed weighing control mode,  
Parameter automatic correction Automatically adapt to  
weighing different specifications and materials



##### Intelligent Touch Screen Display

Using touch screen instrument  
Omron PLC centralized control  
Real-time tracking system working status



##### Automatic Detection

The device has a self-test function automatic  
troubleshooting, simple and convenient maintenance



##### Data Transmission

Reserved RS485 serial port,  
Can carry out data communication  
with the central control system



##### Easy to Changerover

easy to change the mold for  
different packaging specification



##### High-end Configuration

Imported vacuum pump, stable and  
reliable quality, long service life

#### Technical Parameters

Specification	LZB-500-FR10		LZB-500-FR15	
	pillow shape vacuum packing	brick shape vacuum packing	pillow shape vacuum packing	brick shape vacuum packing
Range (kg)	1~10	0.5~5	1~10	0.5~5
Speed ( bag/h)	180~240	300~360	180~240	300~500
Power consumption	4N-AC 380V 50Hz 4.0KW		4N-AC 380V 50Hz 7.5KW	
Air consumption	0.5~0.6Mpa 22m <sup>3</sup> /h		0.4~0.6Mpa 22m <sup>3</sup> /h	
Machine size L*W*H (mm)	2200×2200×2800		2240×1950×2780	

The above data are obtained by taking rice as material under specific conditions



Electronic Rice Blending Machine



Note: It is suitable for industries that require continuous operation and automatic control of material flow speed, such as grain processing and quantitative proportioning

Features



**Automatic Control Gate**  
The size of the gate can be automatically adjusted according to the flow rate to make sure the ratio is accurate.



**Automatic Detection**  
It has the function of automatic flow correction during operation



**Even Ratio**  
Single material level detection control discharge to ensure the uniformity of the output.



**Data Transmission**  
The reserved communication interface can be connected with the central control system, Possess perfect communication function.



**Easy to Clean**  
One-key clearing can conveniently clear the material in the weighing hopper.



**Sealed Design**  
Effectively isolate dust, the external suction port can be connected to the wind net, and effectively keep the interior of the device clean.

Technical Parameters

Specification	LCJ-10T-8	LCJ-20T-8	LCJ-10T-9	LCJ-20T-9
capacity (T)	0.5~10	0.5~20	0.5~10	0.5~20
accuracy	≤0.5%			
Power consumption	AC 220V 50Hz 100W		AC 220V 50Hz 30W	
Air consumption	0.4~0.6MPa		0.4~0.6MPa 1m³/h	
Machine size L*W*H (mm)	785×620×763		854×807×850	854×807×1045

The above data are obtained by taking rice as material under specific conditions

Electronic Flow Scale



Features



**Sealed design**  
Streamlined host and electric control box fully sealed design,( No dust ) double-layer structure metering stability



**Electric Motor Type**  
Optional motor type,Suitable for severe cold environments and more workplaces



**Data Communication**  
Reserved communication interface It can be connected with the central control system, Possess perfect communication function.



**Data Printing**  
Optional printer,Print out production output and other information



- print style (optional)
- Convenient for data statistics and recording



Note: Applicable to the cumulative measurement of materials (raw materials) in grain processing, storage, ports, logistics, etc.

Technical Parameters

Specification	LCS-18T	LCS-30T	LCS-60T	LCS-120T	LCS-150T
Maximum accumulation (t/h)	18	30	60	120	150
Accuracy grade	0.2				
Power consumption	AC 220V 50Hz 70W				
Air consumption	0.4~0.6Mpa 1m³/h				
Machine size L*W*H (mm)	800x1150x2100	950x1300x2550	1200x1400x2750	1500x1500x3250	1600x1600x3500

Note: 1. LCS-18T-D and LCS-30T-D electric type are optional .  
2. A printer is optional to print out production output and other information.  
The above data are obtained by taking rice as material under specific conditions





PZX-3000-E40



Case Packer for Pillow /  
Brick Shape Vacuum Packages



PZX-1500-E20



Vertical packaging machine

Applications:

This machine can be used to pack various granular items, such as : sugar, salt, rice, seeds, coffee, beans, peanuts, melon seeds, puffed food, biscuits, washing powder, etc.

Features:

The machine can automatically complete all the work of weighing, bag making, filling, sealing, cutting, counting, etc. The design adopts unique embedded sealing, reinforced heat sealing mechanism, intelligent temperature control, good performance, low noise, and clear sealing lines Strong sealing.

Specification	JL-180	JL-220	JL-270	JL-300	JL-360
Bag size	L:40-240mm W:50-150mm	L:40-300mm W:50-200mm	L:80-350mm W:100-250mm	L:80-400mm W:120-300mm	L:100-450mm W:150-360mm
Range	≤ 90bags/min	≤ 80bags/min	≤ 70bags/min	≤ 60bags/min	≤ 50bags/min
Compressed air	6kg/m <sup>2</sup> ,0.2m <sup>3</sup> /min				
Air consumption	3kW				
Machine size L*W*H (mm)	1320x980x1580	1350x1060x1450	1360x1160x1550	1700x1400x1900	1900x1400x1900
Machine weight	350kg	500kg	550kg	750kg	850kg

The above data are obtained from testing under specific conditions

Rotary Packaging Machine



Specification	JLS8-200C
Range	20~60bags/Min(Speed is determined by product characteristics and the filling weight)
Bag size (mm)	L:150-325mmW:70-210mm
Weight	≤5-1500g
Bag type	Composite bags such as stand-up bags, handbags, zipper bags, four-side seal bags, three-side seal bags, paper bags, M- shaped bags, etc.
Air consumption	≤3m3/min(Compressed air is provided by the user)
Film materials	PA/PE、PET/PE、 Heat sealing film such as aluminum film
Power	380V/50Hz;Total power consumption:2093kW
Machine weight	About 1000kg
Machine size L*W*H (mm)	1920x1880x1570mm







The above data are obtained from testing under specific conditions

Applications:

Frozen prepared foods, blocks, nuts, granules, powder, liquid, sauces, and other materials that can be bagged.

Complete Line:

A complete set of automatic weighing and packaging production line can be formed by elevator, computer combination multi-head scale, workbench, conveyor, metal inspection machine, re-inspection machine, X- ray foreign matter inspection machine, etc.

Features	
 <b>intelligent gripping</b> bag direction turn-able Make the carton more balanced	 <b>High-speed packing</b> Four-station / double-station design Fast and efficient
 <b>Intelligent touch screen display</b> PLC Using touch screen and PLC,centralized control easy to operate	 <b>high compatibility</b> Compatible with single / double row packing pillow and brick shape vacuum bags packing , stacking
 <b>Servo Control</b> Using servo motor, electric cylinder,Packing speed is high and stable	 <b>Soft bag rejection</b> The soft bag is automatically detected and rejected

Technical Parameters				
Specification	PZX-3000-E40		PZX-1500-E20	
Range (kg)	Pillow shape vacuum	Brick shape vacuum outer bag	Pillow shape vacuum	Brick shape vacuum outer bag
	2~10	2.5~5	2~10	2.5~5
Speed ( bag/h)	2400~2800 🍑🍑🍑🍑		1200~1500 🍑🍑	
Power consumption	4N-AC 380V 50Hz 8KW		4N-AC 380V 50Hz 4KW	
Air consumption	0.5~0.6MPa 14m <sup>3</sup> /h		0.5~0.6MPa 7m <sup>3</sup> /h	
Machine size L*W*H (mm)	2950×2150×2450		2400×1750×2450	

The above data are obtained by taking rice as material under specific conditions



## Z type Elevator



Model	JL-1.8L to JL-50L
Capacity	5m <sup>3</sup> to 60 m <sup>3</sup>
Motor Voltage	0.55~30KW

The above data are obtained from testing under specific conditions

## Bucket Elevator



Model	Capacity(t/h)	Power (KW)
JW6	6	1.1
JW10	10	1.5
JW15	15	2.2
JW30	30	3

The above data are obtained from testing under specific conditions

## Metal Detector



## Check Weigher



## Inkjet Printer



- Controller and Printhead Separated**  
Separated type, suitable for different installation environment.
- Online Edit**  
5 inch touch screen.
- Economic and Practical**  
A good printer for integration of various equipment.
- Chinese Input**  
Support Chinese Input, in multiple fonts.


## IRB-660

### IRB series-palletizing robot



- material handling
- Palletizing

### Working Range

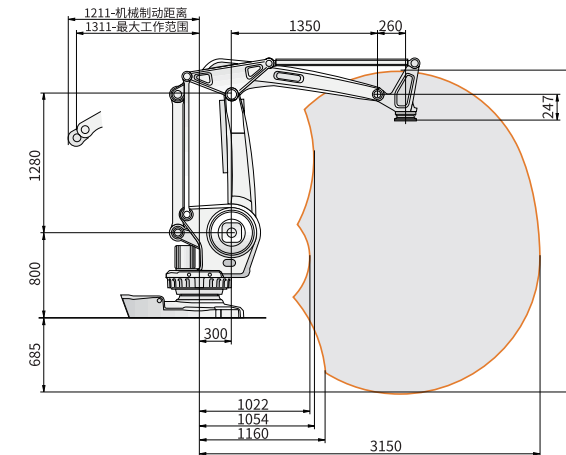


## CP180L

### CP series-palletizing robot



- material handling
- Palletizing

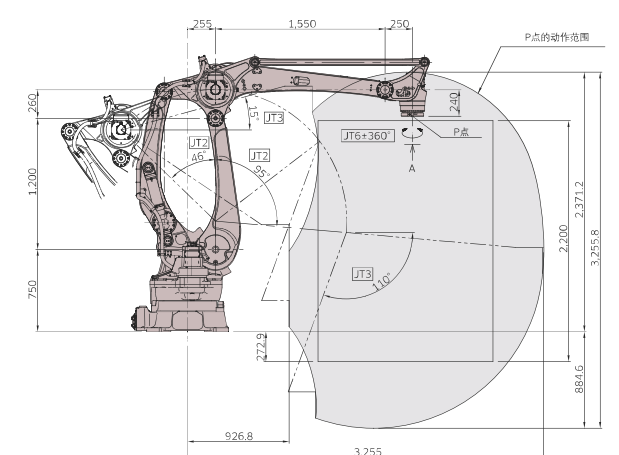

Automation



Industrial operation



Improve productivity



Reduce labor costs



Increased competitiveness

With the development of science and technology, the usage of automated palletizing robot is becoming more and more common. The use of palletizing robot for palletizing can not only liberate people from heavy physical labor, harsh and dangerous working environment, but also greatly improve the efficiency of enterprises. Therefore, palletizing robots are appearing in more and more production workshops.

## LZD-1200-D40

### Secondary packing machine- For brick shape





### Accumulating Paddy's Weight




### Accumulating Paddy's Weight



- **Paddy Separator**



### Accumulating Paddy's Weight

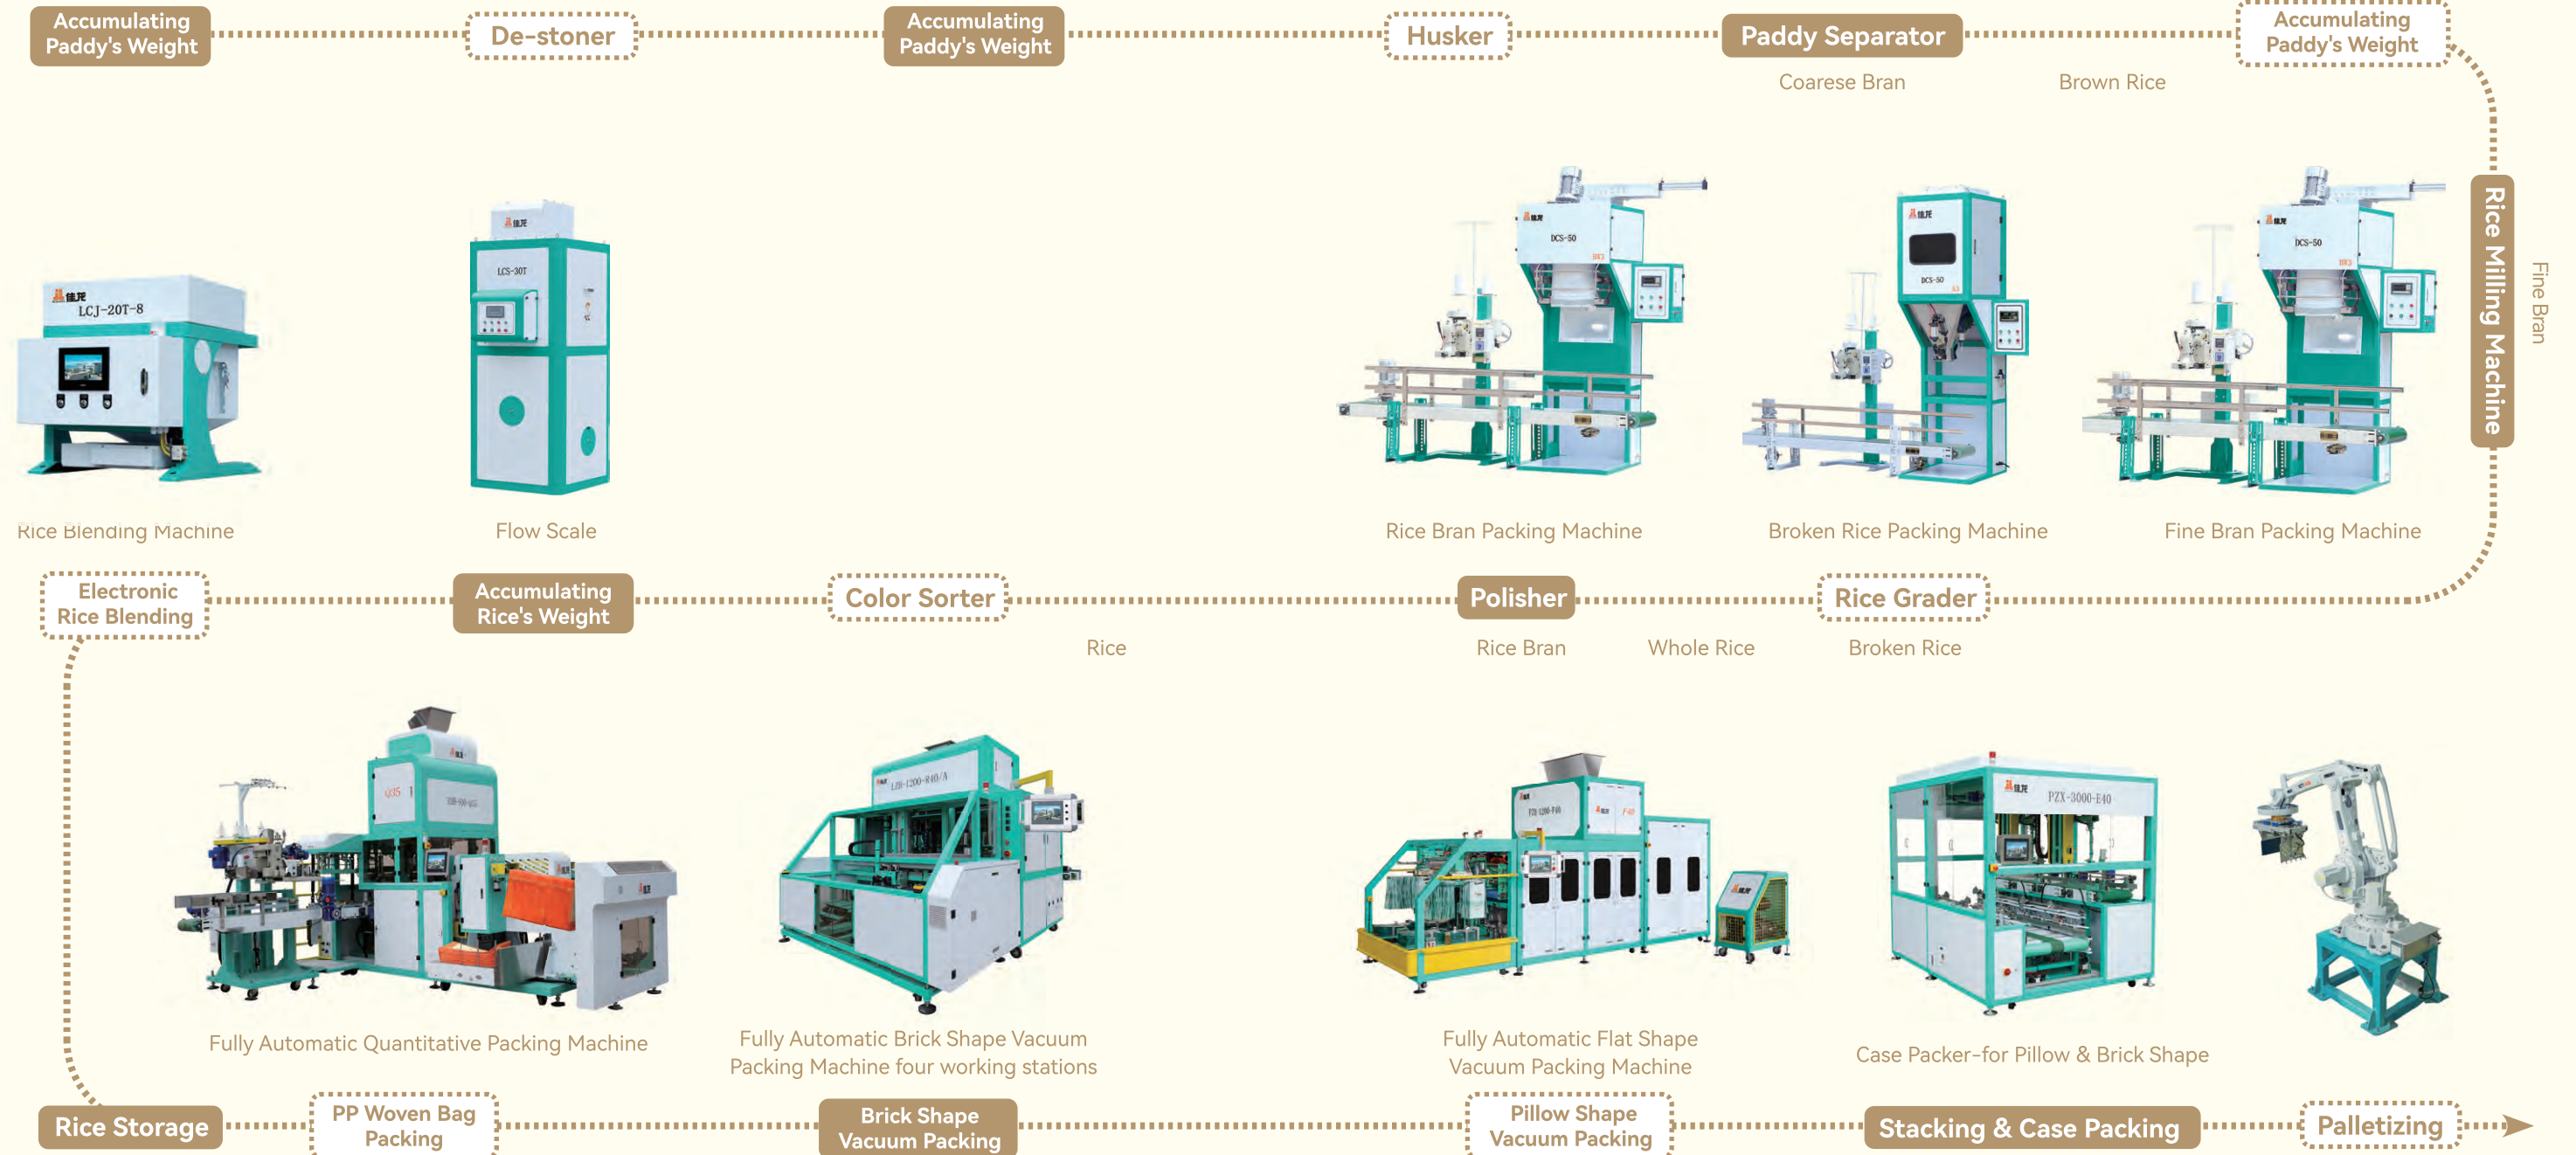



# Some Customer Sites

Jialong provides customers with timely, fast and thoughtful services, and provides professional training and technical guidance to customers in a timely manner to solve customers' problems.

The trust of customers is the driving force for us to continue to move forward, and it is our unremitting pursuit to satisfy every customer.



Welcome to contact Jialong

[www.jialongpacking.com/contact](http://www.jialongpacking.com/contact)



Jialong persists "Customer-centric" as guideline



Jialong has more than 23 years experience



provide one-stop packing solution for domestic and oversea customers

