

Vacuum Packer—Two in OneLZB-500-FR10

● Application

Suitable for granule materials' weighing & vacuum packing.(Rice, beans, seeds, sugar, pulses etc.

● Technical Parameters

Model	LZB-500-FR10	
Weighing Extent(kg)	Cubic 0.5~5	Flatten1~10
Operation Speed (bags/h)	Cubic 300~360	Flatten 180~240
Interval value	2	
Accuracy Grade	X(0.5)	
Power, Power Consumption	4N-AC 380V 50Hz 4.0KW	
Air, air expenditure	0.4-0.6MPa 22m ³ /h	
Size (L×W×Hmm)	2150×2200×2800	

Note: the design volume is 0.8kg/L of rice as the standard.

● Main configure


1	Touch Screen	Shenzhen/WEINVIEW
2	Weighing Controller	Canada/General measure
3	PLC	Japan/Omron
4	Power Supply	Japan/Omron
5	Solid State relay	Japan/Omron
6	Intermediate relay	Japan/Omron
7	Load cell	USA/celtron
8	phase order protector	France/Schneider
9	Vacuum pump	Germany/LEYBOLD
10	Cylinder	Taiwan/airtac
11	Solenoid valve	Taiwan/airtac

● Function &Features


- Unique design cubic and flatten shaping institution, flexible packing size, big packing weight extend, easy to change the mould
- Adopt imported load cell, Omron touch screen, pneumatic element and detective element, reliable and with a self-reduction and safety devices
- The main structure of aluminum and stainless steel materials based, attractive looking and durable using
- imported from Germany, vacuum pumps, stable and reliable;
- Reserved RS232/485 serial port can be used with the external management system for data communication
- Echo-friendly design
- device with fault self-test function, maintenance is simple and convenient

● Machine pic



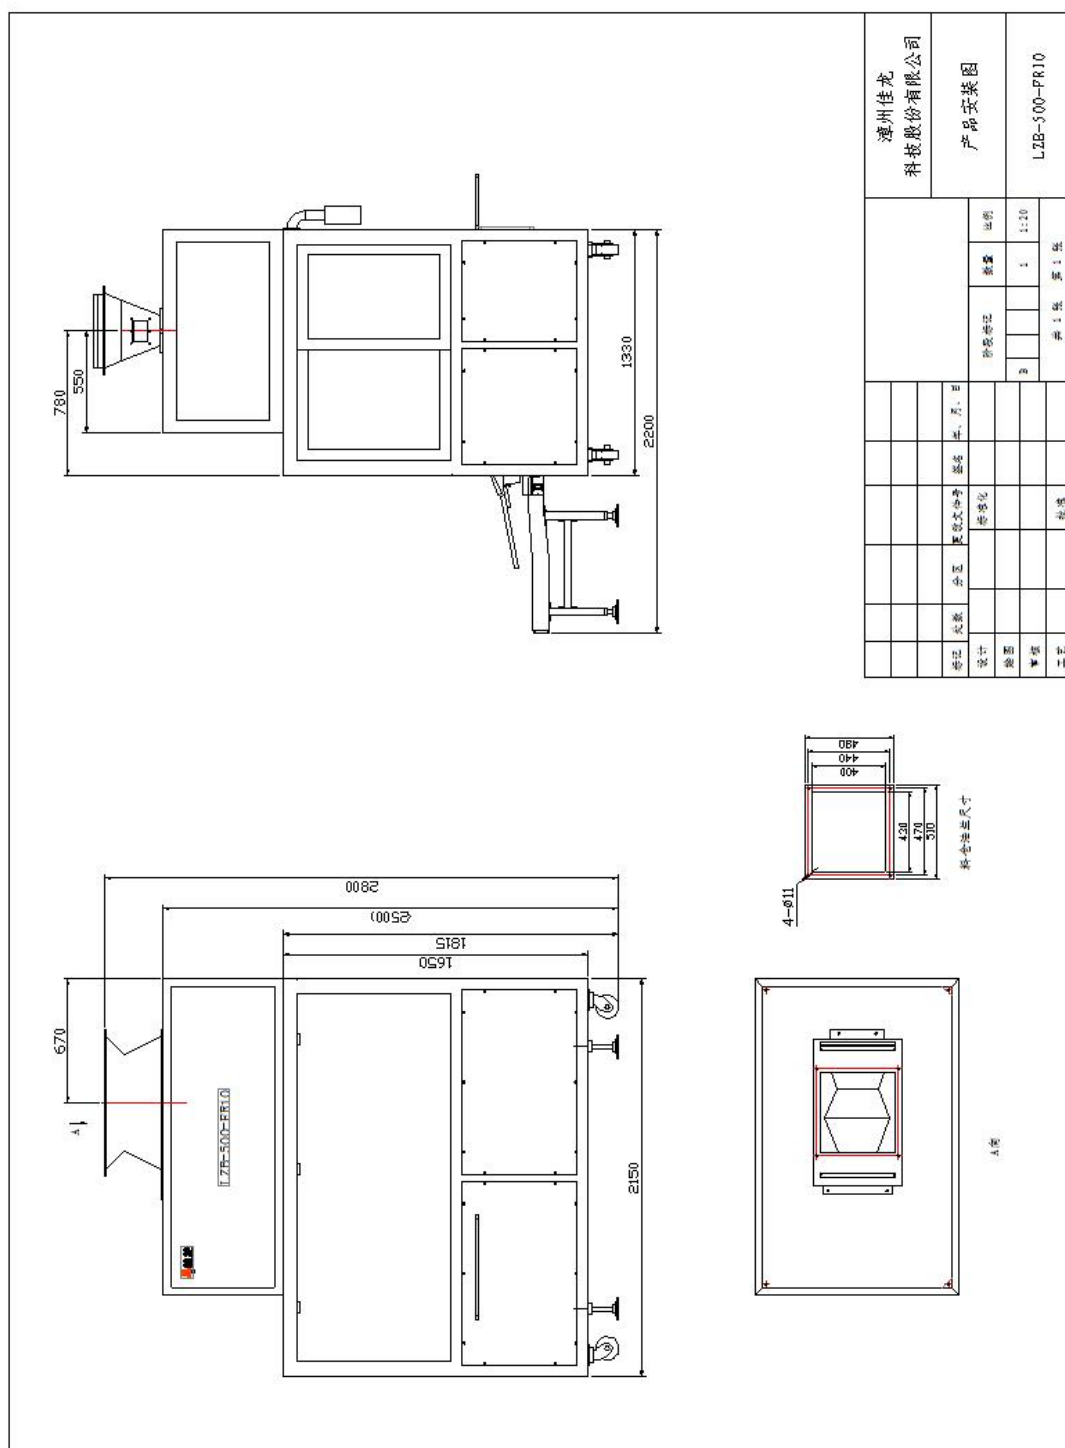

● Bag info

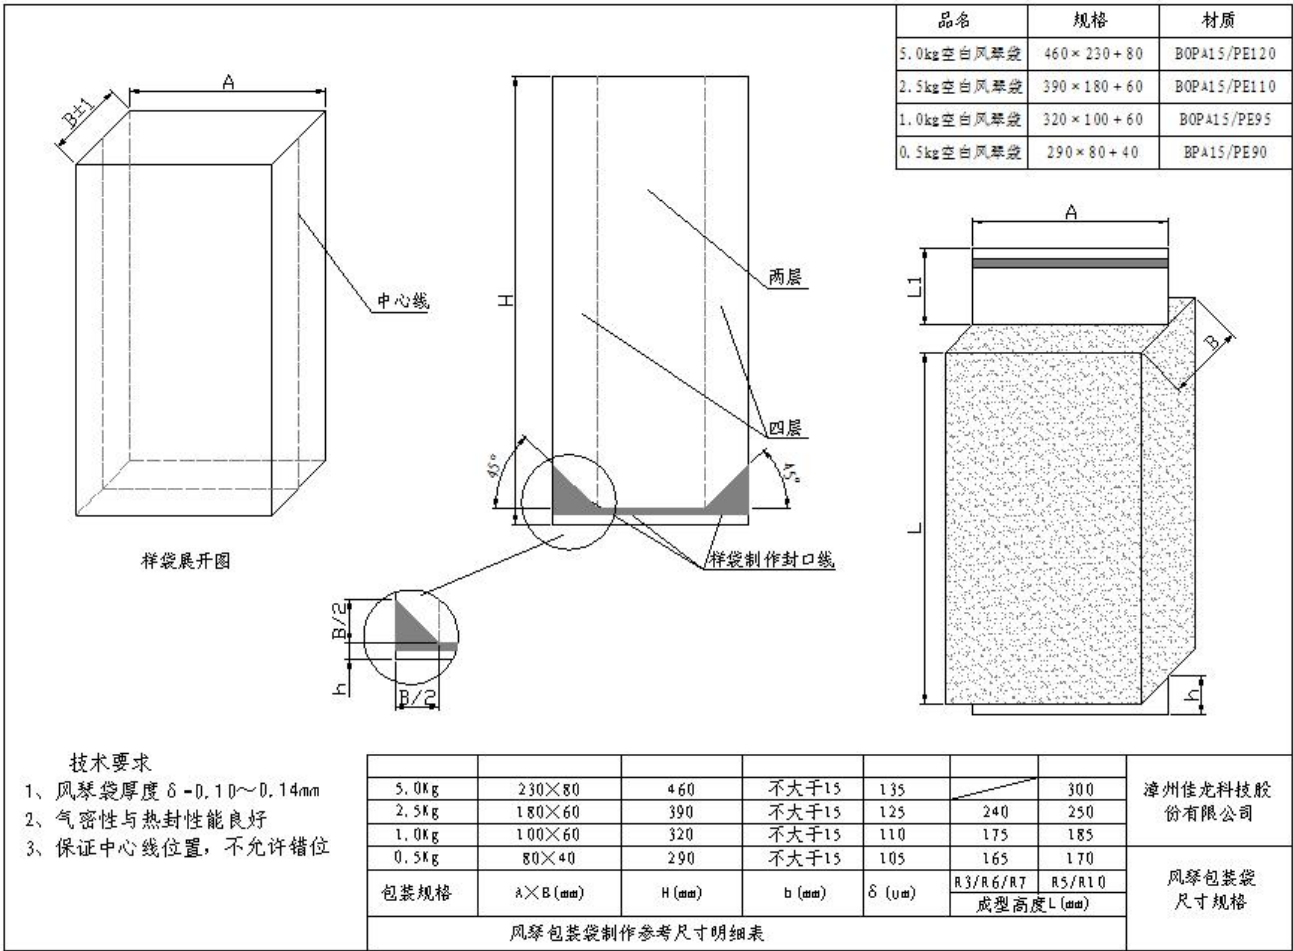

●