


叉车阀 Forklift Valves  
型号Model: JCDB-F15



产品特点 Product Features

- |                   |  |
|-------------------|--|
| 1、控制方式：手控         | 1.Control Mode:Control Manually                              |
| 2、回路形式：并联回路       | 2.Loop Form:Shunt Circuit                                    |
| 3、密封性好            | 3.Good Sealing Performance                                   |
| 4、溢流阀、过载阀等采用插装式结构 | 4.Overflow Valve And Overload Valve Adopt Plug-in Structure. |
| 5、结构紧凑、压力损失小      | 5.Compact Structure And Small Pressure Loss.                 |
| 6、通用性好，便于维修       | 6.Good Universality And Easy Maintenance.                    |

液压原理图 Hydraulic Schematic Diagram

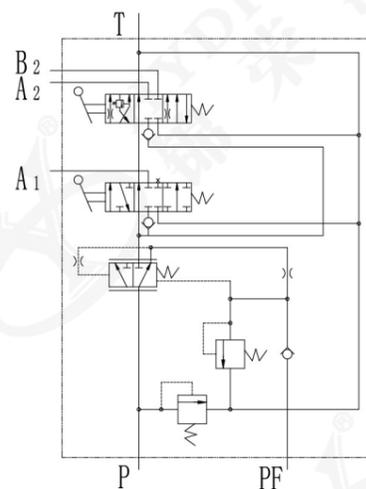

技术参数 Specifications

概述 Summary ( JCDB-F15 )		
油口连接方式 Oil Port Connection Mode		螺纹连接 Threaded Connection
控制方式 Control Mode		压力控制 Pressure Control
安装方式 Installation Mode		见外形图 See Outline Drawing.
通径 Iatus Rectum	mm	15
液压 Hydraulic Pressure		
公称流量 Nominal Flow Rate	L/min	80
允许最大回油背压 Maximum Allowable Oil Return Back Pressure	bar	15
液压油温度范围 Hydraulic Oil Temperature Range	℃	-20 ~ +100
粘度范围 Viscosity Range	m <sup>2</sup> /s	10~460
油液允许的污染等级 Permissible Pollution Level Of Oil		-/19/16 ( ISO4406:1999 )
机械 Machinery		
重量	kg	7.5
阀芯允许的最大操作力 Maximum Operating Force Allowed By Valve Core	N	300

产品外形图 Product Outline Drawing

