


多路换向阀 Multiple Directional Control Valves  
型号Model: DL20D.2YK



产品特点Product Features

- |                   |  |
|-------------------|--|
| 1、控制方式：液控         | 1.Control Mode:Hydraulic Control                             |
| 2、回路形式：串联回路       | 2.Loop Form:Series Circuit                                   |
| 3、密封性好            | 3.Good Sealing Performance                                   |
| 4、溢流阀、过载阀等采用插装式结构 | 4.Overflow Valve And Overload Valve Adopt Plug-in Structure. |
| 5、结构紧凑、压力损失小      | 5.Compact Structure And Small Pressure Loss.                 |
| 6、通用性好，便于维修       | 6.Good Universality And Easy Maintenance.                    |

液压原理图Hydraulic Schematic Diagram

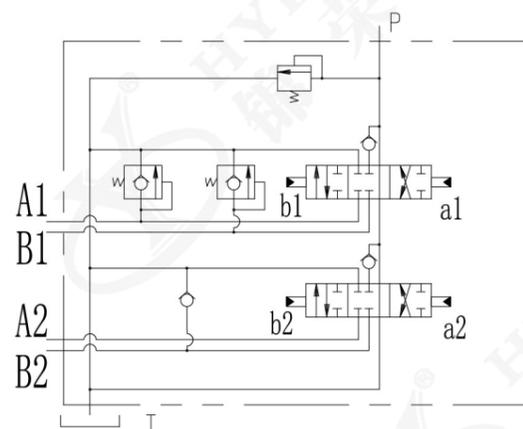

技术参数Specifications

概述Summary ( DL20D.2YK )		
油口连接方式Oil Port Connection Mode		螺纹连接Threaded Connection
控制方式Control Mode		压力控制Pressure Control
安装方式Installation Mode		见外形图See Outline Drawing.
通径Iatus Rectum	mm	20
液压Hydraulic Pressure		
公称流量Nominal Flow Rate	L/min	100
允许最大回油背压 Maximum Allowable Oil Return Back Pressure	bar	15
先导控制压力Pilot Control Pressure	bar	30
先导控制曲线Pilot Control Curve	bar	4-20
液压油温度范围 Hydraulic Oil Temperature Range	℃	-20 ~ +100
粘度范围Viscosity Range	m <sup>2</sup> /s	10~460
油液允许的污染等级 Permissible Pollution Level Of Oil		-/19/16 ( ISO4406:1999 )
机械Machinery		
重量Weight	kg	15
阀芯允许的最大操作力 Maximum Operating Force Allowed By Valve Core	N	300

产品外形图Product Outline Drawing

