


Grounding Wire

Grounding wire clamp is used for earth connection of OPGW Fiber Cable, and supplies access of short - circuit current. It consists of one aluminum alloy sealing cap, one aluminum strands and one aluminum alloy parallel groove clamp (connecting OPGW Fiber Cable), and one wiring nose of aluminum alloy material (connecting to tower).

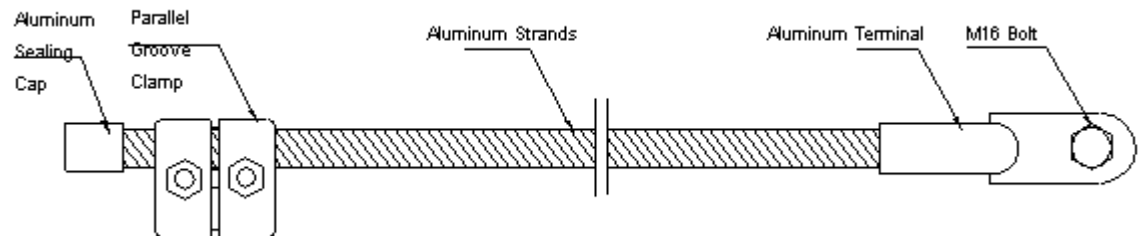

Selection Table

Catalog Number	Parallel Groove Clamp	Aluminum Strands	Aluminum Terminal	Aluminum Sealing Cap	Suitable Cable Diameter (mm)
VJD 70-1500	JB-2	70 ²	70 ²	70 ²	9.0-11.5
VJD 95-1500	JB-2	95 ²	95 ²	95 ²	11.6-14.0
VJD 120-1500	JB-3	120 ²	120 ²	120 ²	14.1-17.0
VJD 70-2000	JB-2	70 ²	70 ²	70 ²	9.0-11.5
VJD 95-2000	JB-2	95 ²	95 ²	95 ²	11.6-14.0
VJD 120-2000	JB-3	120 ²	120 ²	120 ²	14.1-17.0