

Top Tie Clamp (For Bare Conductor and Insulated Conductor, the Neck Diameter of Insulator in $54\text{mm} \leq X < 60\text{mm}$)

Catalog Number	Diameter Range(mm)	Color Code	Chinese Standard Conductor (GB)		
			LJ	Common Insulation	Thin Insulation
VUTC1100P	4.83-5.46	Blue	16		10
VUTC1101P	5.47-6.20	Brown			16
VUTC1102P	6.21-7.04	Orange	25		
VUTC1103P	7.05-8.00	Purple	35		
VUTC1104P	8.01-9.07	Red	50		
VUTC1105P	9.08-10.29	Yellow			
VUTC1106P	10.30-11.66	Blue	70		
VUTC1107P	11.67-13.21	Orange	95	10,16	
VUTC1108P	13.22-14.94	Red	120		25
VUTC1109P	14.95-16.89	Purple	150	25,35	35,50
VUTC1110P	16.90-19.19	Brown	185,210	50	70
VUTC1111P	19.20-21.81	Red	240	70,95	95,120
VUTC1112P	21.82-24.60	Blue	300	120,150	150,185
VUTC1113P	24.61-27.84	Green	400	185	240
VUTC1114P	27.85-31.49	Yellow			
VUTC1115P	31.50-35.61	Orange 桔			

Note:1. For right lay direction bare conductor and insulated conductor.

2. P means matching hose



Top Tie Clamp (For Bare Conductor and Insulated Conductor, the Neck Diameter of Insulator in $70\text{mm} \leq X < 76\text{mm}$)

Catalog Number	Diameter Range(mm)	Color Code	Chinese Standard Conductor (GB)		
			LJ	Common Insulation 10kV	Thin Insulation 10kV
VUTF1200P	4.83-5.46	Blue	16		10
VUTF1201P	5.47-6.20	Brown			16
VUTF1202P	6.21-7.04	Orange	25		
VUTF1203P	7.05-8.00	Purple	35		
VUTF1204P	8.01-9.07	Red	50		
VUTF1205P	9.08-10.29	Yellow			
VUTF1206P	10.30-11.66	Blue	70		
VUTF1207P	11.67-13.21	Orange	95	10,16	
VUTF1208P	13.22-14.94	Red	120		25
VUTF1209P	14.95-16.89	Purple	150	25,35	35,50
VUTF1210P	16.90-19.19	Brown	185,210	50	70
VUTF1211P	19.20-21.81	Red	240	70,95	95,120
VUTF1212P	21.82-24.60	Blue	300	120,150	150,185
VUTF1213P	24.61-27.84	Green	400	185	240
VUTF1214P	27.85-31.49	Yellow			
VUTF1215P	31.50-35.61	Orange			


**Note:1. For right lay direction bare conductor and insulated conductor.
2. P means matching hose**

Top Tie Clamp (For Bare Conductor and Insulated Conductor, the Neck Diameter of Insulator in $76\text{mm} \leq X < 81\text{mm}$)

Catalog Number	Diameter Range(mm)	Color Code	Chinese Standard Conductor (GB)		
			LJ	Common Insulation 10kV	Thin Insulation 10kV
VUT1700P	4.83-5.46	Blue	16		10
VUT1701P	5.47-6.20	Brown			16

VUT1702P	6.21-7.04	Orange	25		
VUT1703P	7.05-8.00	Purple	35		
VUT1704P	8.01-9.07	Red	50		
VUT1705P	9.08-10.29	Yellow			
VUT1706P	10.30-11.66	Blue	70		
VUT1707P	11.67-13.21	Orange	95	10,16	
VUT1708P	13.22-14.94	Red	120		25
VUT1709P	14.95-16.89	Purple	150	25,35	35,50
VUT1710P	16.90-19.19	Brown	185,210	50	70
VUT1711P	19.20-21.81	Red	240	70,95	95,120
VUT1712P	21.82-24.60	Blue	300	120,150	150,185
VUT1713P	24.61-27.84	Green	400	185	240
VUT1714P	27.85-31.49	Yellow			
VUT1715P	31.50-35.61	Orange			

**Note:1. For right lay direction bare conductor and insulated conductor.
2. P means matching hose**

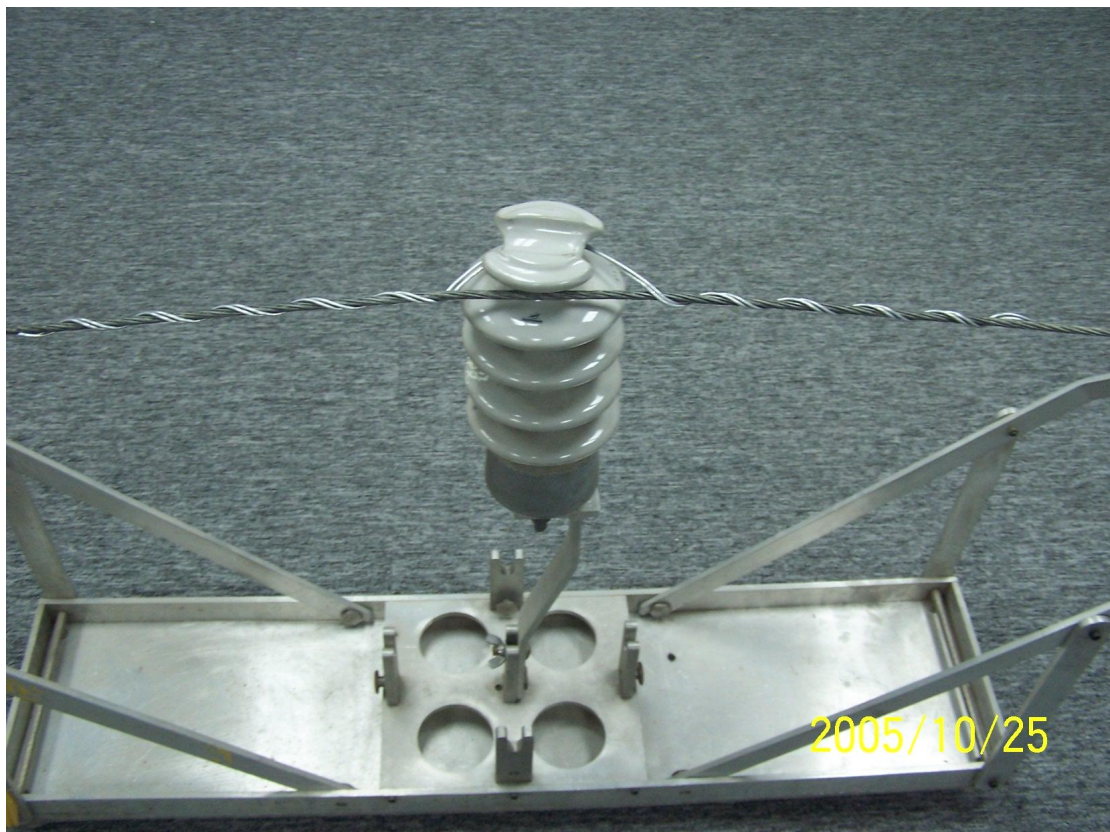

Side Tie Clamp

Side Tie Clamp (For Bare Conductor and Insulated Conductor, the Neck Diameter of Insulator in $54\text{mm} \leq X < 60\text{mm}$)

Catalog Number	Diameter Range(mm)	Color Code	Chinese Standard Conductor (GB)		
			LJ	Common Insulation 10kV	Thin Insulation 10kV
VSTC1250P	4.83-5.46	Blue	16		10
VSTC1251P	5.47-6.20	Brown			16
VSTC1252P	6.21-7.04	Orange	25		
VSTC1253P	7.05-8.00	Purple	35		
VSTC1254P	8.01-9.07	Red	50		
VSTC1255P	9.08-10.29	Yellow			
VSTC1256P	10.30-11.66	Blue	70		
VSTC1257P	11.67-13.21	Orange	95	10,16	
VSTC1258P	13.22-14.94	Red	120		25
VSTC1259P	14.95-16.89	Purple	150	25,35	35,50
VSTC1260P	16.90-19.19	Brown	185,210	50	70
VSTC1261P	19.20-21.81	Red	240	70,95	95,120
VSTC1262P	21.82-24.60	Blue	300	120,150	150,185
VSTC1263P	24.61-27.84	Green	400	185	240
VSTC1264P	27.85-31.49	Yellow			
VSTC1265P	31.50-35.61	Orange			

**Note:1. For right lay direction bare conductor and insulated conductor.
2. P means matching hose**

Side Tie Clamp (For Bare Conductor and Insulated Conductor, the Neck Diameter of Insulator in $70\text{mm} \leq X < 76\text{mm}$)

Catalog Number	Diameter Range(mm)	Color Code	Chinese Standard Conductor (GB)		
			LJ	Common Insulation 10kV	Thin Insulation 10kV
VSTF1150P	4.83-5.46	Blue	16		10
VSTF1151P	5.47-6.20	Brown			16
VSTF1152P	6.21-7.04	Orange	25		
VSTF1153P	7.05-8.00	Purple	35		
VSTF1154P	8.01-9.07	Red	50		
VSTF1155P	9.08-10.29	Yellow			
VSTF1156P	10.30-11.66	Blue	70		
VSTF1157P	11.67-13.21	Orange	95	10,16	
VSTF1158P	13.22-14.94	Red	120		25
VSTF1159P	14.95-16.89	Purple	150	25,35	35,50
VSTF1160P	16.90-19.19	Brown	185,210	50	70
VSTF1161P	19.20-21.81	Red	240	70,95	95,120

VSTF1162P	21.82-24.60	Blue	300	120,150	150,185
VSTF1163P	24.61-27.84	Green	400	185	240
VSTF1164P	27.85-31.49	Yellow			
VSTF1165P	31.50-35.61	Orange			

Note:1. For right lay direction bare conductor and insulated conductor.

2. P means matching hose

Side Tie Clamp (For Bare Conductor and Insulated Conductor, the Neck Diameter of Insulator in $76\text{mm} \leq X < 81\text{mm}$)

Catalog Number	Diameter Range(mm)	Color Code	Chinese Standard Conductor (GB)			
			LJ	Common Insulation 10kV	Thin Insulation 10kV	Insulation
VST1650P	4.83-5.46	Blue	16		10	
VST1651P	5.47-6.20	Brown			16	
VST1652P	6.21-7.04	Orange	25			
VST1653P	7.05-8.00	Purple	35			
VST1654P	8.01-9.07	Red	50			
VST1655P	9.08-10.29	Yellow				
VST1656P	10.30-11.66	Blue	70			
VST1657P	11.67-13.21	Orange	95	10,16		
VST1658P	13.22-14.94	Red	120		25	
VST1659P	14.95-16.89	Purple	150	25,35	35,50	
VST1660P	16.90-19.19	Brown	185,210	50	70	
VST1661P	19.20-21.81	Red	240	70,95	95,120	
VST1662P	21.82-24.60	Blue	300	120,150	150,185	
VST1663P	24.61-27.84	Green	400	185	240	
VST1664P	27.85-31.49	Yellow				
VST1665P	31.50-35.61	Orange				

Note:1. For right lay direction bare conductor and insulated conductor.

2. P means matching hose

Universal Tie Clamp

The universal tie clamp structure is simple and is used for fixing the conductor on the insulator and has the advantages of various installation modes, simple installation and convenient use.

Top Tie Clamp (For Bare Conductor and Insulated Conductor, the Neck Diameter of

Insulator in 76mm≤X<81mm)

Catalog Number	Diameter Range(mm)	Parameter of Products			Chinese Standard Conductor (GB)		
		Rod Diameter	Color Code	Rods/Set	LJ	Common Insulation 10kV	Thin Insulation 10kV
VFLT-100	5.82-6.52	2.59	Orange	2			16
VFLT-101	6.55-7.34	2.59	Yellow	2	25		
VFLT-102	7.37-8.25	2.59	Red	2	35		
VFLT-103	8.28-9.25	2.59	Green	2	50		
VFLT-104	9.27-10.38	2.59	Yellow	2			
VFLT-105	10.41-11.6	3.25	Blue	2	70		
VFLT-106	11.7-13.1	3.25	Orange	2	95	10,16	
VFLT-107	13.13-14.65	3.25	Red 红	2	120		25
VFLT-108	14.68-16.89	3.25	Black	2	150	25,35	35,50
VFLT-109	16.91-19.88	3.25	Green	2	185,210	50	70
VFLT-110	19.91-22.43	3.25	Orange	2	240	70,95	95,120
VFLT-111	22.45-26.04	3.25	Brown	2	300	120,150	150,185
VFLT-112	26.06-30.89	3.25	Orange	2	400	185	240

Note: Universal tie clamps are used for P6,P10,P15 type Pin Insulator.