2026 KOIBIKE

CARBON BICYCLE RIMS CATALOGUE

YOUR WHEEL, OUR SPIRIT

CATALOG

01 / CARBON ROAD RIMS
01-03 / 26MM Outer Width Tubeless Rims
04 / 26MM Outer Width Tubeless Rims Asymmetric
05-07 / 26MM Outer Width Tubular Rims
08 / 26MM Outer Width Tubular Rims Asymmetric

02 / CARBON ROAD RIMS
09-10 / 28MM Outer Width Tubeless Rims NEW

03 / CARBON ROAD RIMS
11-14 / 30MM Outer Width Tubeless Rims NEW

04 / CARBON WAVE RIMS
15-16 / 28MM Outer Width Wave Rims
17 / 32MM Outer Width Wave Rims
18 / 37MM Outer Width Wave Rims
19 / 29ER MTB Wave Shape Rim

05 / CARBON GRAVEL RIMS
20 / 36MM Outer Width Tubeless Rims
21 / 46MM Outer Width Tubeless Rims

06 / CARBON MTB RIMS
22-26 / XC/TR/AM/EN MTB Rims
27 / 32inch Carbon MTB XC/AM Rims NEW

07 / CARBON BMX RIMS
28 / 20” Carbon BMX/Folding Bike Rims

08 / CARBON FATBIKE RIMS
29 / 24/26/27.5” Carbon Fatbike Rims

26mm Outer Width Road Rims--Tubeless


26
19
Ø622
25
ERD:589

R25X26TL: 390±15g (T700 NL)
R25X26TL: 365±15g (T800 UL)

D25X26TL: 390±15g (T700 NL)
D25X26TL: 360±15g (T800 SL)
D25X26TL: 330±15g (T800 UL)


26
19
Ø622
35
ERD:569

R35X26TL: 435±15g (T700 NL)
R35X26TL: 410±15g (T800 UL)

D35X26TL: 420±15g(T700 NL)
D35X26TL: 400±15g(T800 SL)
D35X26TL: 350±15g(T800 UL)


26
19
Ø622
36
ERD:567

R36X26TL: 435±15g (T700 NL)
R36X26TL: 410±15g (T800 UL)

D36X26TL: 420±15g(T700 NL)
D36X26TL: 400±15g(T800 SL)
D36X26TL: 350±15g(T800 UL)


26
19
Ø622
40
ERD:559

R40X26TL: 455±15g(T700 NL)
R40X26TL: 435±15g(T700 UL)

D40X26TL: 440±15g(T700 NL)
D40X26TL: 420±15g(T800 SL)
D40X26TL: 375±15g(T800 UL)

26mm Outer Width Road Rims--Tubeless


26
19
Ø622
45
ERD:549

R45X26TL: 475±15g(T700 NL)
R45X26TL: 455±15g(T800 UL)

D45X26TL: 460±15g(T700 NL)
D45X26TL: 440±15g(T800 SL)
D45X26TL: 390±15g(T800 UL)


26
19
Ø622
46
ERD:547

R46X26TL: 475±15g(T700 NL)
R46X26TL: 455±15g(T800 UL)

D46X26TL: 460±15g(T700 NL)
D46X26TL: 440±15g(T800 SL)
D46X26TL: 390±15g(T800 UL)


26
19
Ø622
50
ERD:539

R50X26TL: 495±15g(T700 NL)
R50X26TL: 475±15g(T800 SL)

D50X26TL: 480±15g(T700 NL)
D50X26TL: 460±15g(T800 SL)
D50X26TL: 420±15g(T800 UL)


27
19
Ø622
55
ERD:529

R55X26TL: 525±15g(T700 NL)
R55X26TL: 505±15g(T800 SL)

D55X26TL: 500±15g(T700 NL)
D55X26TL: 480±15g(T800 SL)
D55X26TL: 440±15g(T800 UL)

26mm Outer Width Road Rims--Tubeless


26
19
Ø622
88
ERD463

R88X26TL: 660±15g(T700 NL)
R88X26TL: 640±15g(T800 UL)

D88X26TL: 640±15g(T700 NL)
D88X26TL: 620±15g(T800 UL)

26mm Outer Width Road Rims--Tubeless Asymmetric


26
19
Ø622
40
ERD:559
2,5

RA40X26TL: 455±15g(T700 NL)
RA40X26TL: 435±15g(T700 UL)

DA40X26TL: 440±15g(T700 NL)
DA40X26TL: 420±15g(T800 SL)
DA40X26TL: 375±15g(T800 UL)


26
19
Ø622
50
ERD:539
2,5

RA50X26TL: 495±15g(T700 NL)
RA50X26TL: 475±15g(T800 SL)

DA50X26TL: 480±15g(T700 NL)
DA50X26TL: 460±15g(T800 SL)
DA50X26TL: 420±15g(T800 UL)

26mm Outer Width Road Rims--Tubular


26
Ø633
25
ERD:589

R25X26T: 230±15g(T800 UL)

D25X26T: 220±15g(T800 UL)


26
Ø633
35
ERD:569

R35X26T: 280±15g(T800 UL)

D35X26T: 270±15g(T800 UL)


26
Ø633
36
ERD:567

R36X26T: 280±15g(T800 UL)

D36X26T: 270±15g(T800 UL)


26
Ø633
40
ERD:559

R40X26T: 310±15g(T800 UL)

D40X26T: 300±15g(T800 UL)

26mm Outer Width Road Rims--Tubular


26
Ø633
45
ERD:549

R45X26T: 330±15g(T800 UL)

D45X26T: 320±15g(T800 UL)


26
Ø633
46
ERD:547

R46X26T: 330±15g(T800 UL)

D46X26T: 310±15g(T800 UL)


26
Ø633
50
ERD:539

R50X26T: 375±15g(T800 UL)

D50X26T: 375±15g(T800 UL)


27
Ø633
55
ERD:529

R55X26T: 395±15g(T800 UL)

D55X26T: 395±15g(T800 UL)

26mm Outer Width Road Rims--Tubular


26
Ø633
88
ERD463

R88X26T: 560±15g(T800 UL)

D88X26T: 550±15g(T800 UL)

26mm Outer Width Road Rims--Tubular Asymmetric


26
25
Ø633
40
ERD:559
2,5

RA40X26T: 310±15g(T800 UL)

DA40X26T: 300±15g(T800 UL)


26
25
Ø633
50
ERD:539
2,5

RA50X26T: 375±15g(T800 UL)

DA50X26T: 375±15g(T800 UL)

28mm Outer Width Road Rims--Tubeless


28
21
Ø622
30
ERD:579

R30X28TL: 420±15g(T700 NL)
R30X28TL: 400±15g(T700 UL)

D30X28TL: 410±15g(T700 NL)
D30X28TL: 390±15g(T800 SL)
D30X28TL: 305±15g(T800 UL)
D30X28TL: 270±15g(T1100 UL)


28
21
Ø622
35
ERD:569

R35X28TL: 440±15g(T700 NL)
R35X28TL: 420±15g(T700 UL)

D35X28TL: 430±15g(T700 NL)
D35X28TL: 410±15g(T800 SL)
D35X28TL: 320±15g(T800 UL)
D35X28TL: 285±15g(T1100 UL)


28
21
Ø622
40
ERD : 559

R40X28TL: 460±15g(T700 NL)
R40X28TL: 440±15g(T700 UL)

D40X28TL: 450±15g(T700 NL)
D40X28TL: 430±15g(T800 SL)
D40X28TL: 340±15g(T800 UL)
D40X28TL: 305±15g(T1100 UL


28
21
Ø622
45
ERD:549

R45X28TL: 485±15g(T700 NL)
R45X28TL: 465±15g(T700 UL)

D45X28TL: 470±15g(T700 NL)
D45X28TL: 450±15g(T800 SL)
D45X28TL: 360±15g(T800 UL)
D45X28TL: 325±15g(T1100 UL)

28mm Outer Width Road Rims--Tubeless


28
21
Ø622
50
ERD:539

R50X28TL: 505±15g(T700 NL)
R50X28TL: 485±15g(T700 UL)

D50X28TL: 490±15g(T700 NL)
D50X28TL: 470±15g(T800 SL)
D50X28TL: 385±15g(T800 UL)
D50X28TL: 350±15g(T1100 UL)


28
21
Ø622
55
ERD:529

D55X28TL: 520±15g(T700 NL)
D55X28TL: 500±15g(T800 SL)
D55X28TL: 420±15g(T800 UL)
D55X28TL: 380±15g(T1100 UL)


28
21
Ø622
62
ERD:515

R62X28TL: 550±15g(T700 NL)
R62X28TL: 530±15g(T700 UL)

D62X28TL: 540±15g(T700 NL)
D62X28TL: 520±15g(T800 SL)
D62X28TL: 450±15g(T800 UL)

30mm Outer Width Road Rims--Tubeless


30
24
Ø622
30
ERD:579

D30X30TL: 400±15g(T700 NL)
D30X30TL: 380±15g(T800 SL)
D30X30TL: 330±15g(T800 UL)
D30X30TL: 305±15g(T1000 UL)
D30X30TL: 265±15g(T1100 UL)


30
25
Ø622
30
ERD:579

D30X30HL: 400±15g(T700 NL)
D30X30HL: 380±15g(T800 SL)
D30X30HL: 330±15g(T800 UL)


30
24
Ø622
35
ERD:569

D35X30TL: 415±15g(T700 NL)
D35X30TL: 395±15g(T800 SL)
D35X30TL: 350±15g(T800 UL)
D35X30TL: 320±15g(T1000 UL)
D35X30TL: 280±15g(T1100 UL)


30
25
Ø622
35
ERD:569

D35X30HL: 415±15g(T700 NL)
D35X30HL: 395±15g(T800 SL)
D35X30HL: 350±15g(T800 UL)

30mm Outer Width Road Rims--Tubeless


30
24
Ø622
40
ERD:559

D40X30TL: 430±15g(T700 NL)
D40X30TL: 410±15g(T800 SL)
D40X30TL: 365±15g(T800 UL)
D40X30TL: 335±15g(T1000 UL)
D40X30TL: 300±15g(T1100 UL)


30
24
Ø622
40
ERD:559

D40X30HL: 430±15g(T700 NL)
D40X30HL: 410±15g(T800 SL)
D40X30HL: 365±15g(T800 UL)


30
23
Ø584
40
ERD : 521

D40X30TL(650B/27.5 ER): 410±15g(T700 NL)
D40X30TL(650B/27.5 ER): 390±15g(T800 SL)
D40X30TL(650B/27.5 ER): 345±15g(T800 UL)


30
24
Ø584
40
ERD : 521

D40X30HL(650B/27.5 ER): 410±15g(T700 NL)
D40X30HL(650B/27.5 ER): 390±15g(T800 SL)
D40X30HL(650B/27.5 ER): 345±15g(T800 UL)

30mm Outer Width Road Rims--Tubeless


30
24
Ø622
45
ERD:549

D45X30TL: 450±15g(T700 NL)
D45X30TL: 430±15g(T800 SL)
D45X30TL: 385±15g(T800 UL)
D45X30TL: 360±15g(T1000 UL)
D45X30TL: 320±15g(T1100 UL)


30
25
φ622
45
ERD:549

D45X30HL: 450±15g(T700 NL)
D45X30HL: 430±15g(T800 SL)
D45X30HL: 385±15g(T800 UL)


30
24
φ622
50
ERD:539

D50X30TL: 470±15g(T700 NL)
D50X30TL: 450±15g(T800 SL)
D50X30TL: 400±15g(T800 UL)
D50X30TL: 385±15g(T1000 UL)
D50X30TL: 345±15g(T1100 UL)


30
25
φ622
50
ERD:539

D50X30HL: 470±15g(T700 NL)
D50X30HL: 450±15g(T800 SL)
D50X30HL: 400±15g(T800 UL)

30mm Outer Width Road Rims--Tubeless


30
24
Ø622
55
ERD:529

D55X30TL: 420±15g(T700 UL)
D55X30TL: 400±15g(T800 UL)
D55X30TL: 380±15g(T1100 UL)


30
24
Ø622
60
ERD:519

D60X30TL: 460±15g(T700 UL)
D60X30TL: 430±15g(T800 UL)
D60X30TL: 400±15g(T1100 UL)


30
24
Ø622
65
ERD:509

D65X30TL: 500±15g(T800 UL)
D65X30TL: 450±15g(T1000 UL)

28mm Outer Width Road Wave Rims--Tubeless


28
21
35
ERD:569
28
21
30
ERD:569

W35X28TL: 360±15g(T800 SL)
W35X28TL: 340±15g(T800 UL)


28
22
35
ERD:569
28
22
30
ERD:569

W35X28HL: 360±15g(T800 SL)
W35X28HL: 340±15g(T800 UL)


28
21
45
ERD:549
28
21
40
ERD:549

W45X28TL: 380±15g(T800 UL)


28
22
45
ERD:549
28
22
40
ERD:549

W45X28HL: 380±15g(T800 UL)

28mm Outer Width Road Wave Rims--Tubeless


28
21
Ø622
50
ERD539
28
21
Ø622
45
ERD539

W50X28TL: 470±15g(T700 NL)
W50X28TL: 430±15g(T800 SL)
W50X28TL: 400±15g(T800 UL)


28
21
Ø622
60
ERD519
28
21
Ø622
55
ERD519

W60X28TL: 530±15g(T700 NL)
W60X28TL: 510±15g(T800 SL)
W60X28TL: 490±15g(T800 UL)

32mm Outer Width Road Wave Rims--Tubeless


32
24
45
ERD:549
32
24
40
ERD:549

W45X32TL: 380±15g(T800 UL)


32
25
45
ERD:549
32
25
40
ERD:549

W45X32HL: 380±15g(T800 UL)

37mm Outer Width Road Wave Rims--Tubeless

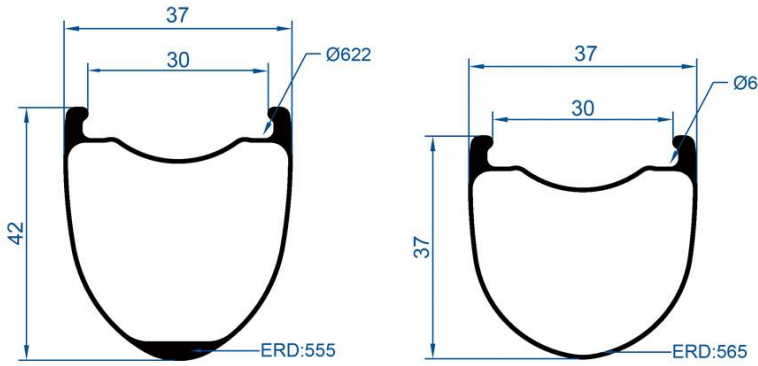
37
30
Ø622
42
ERD:555
37
30
Ø622
37
ERD:565

W42X37TL:420±15g(T1000)

Carbon MTB Wave Rims--Tubeless Hookless


35
30
Ø622
25
ERD:589
2.6000


35
30
Ø622
22
ERD:595
2.6000

XC-W25X35HL-29ER: 360±15g(T800 SL)
XC-W25X35HL-29ER: 320±15g(T800 UL)

36mm Outer Width Road/Gravel Rims--Tubeless


36
30
Ø622
32
ERD: 575

G32X36TL: 390±15g(T800 SL)
G32X36TL: 370±15g(T800 UL)


36
30
Ø622
42
ERD: 555

G42X36TL: 425±15g(T800 SL)
G42X36TL: 405±15g(T800 UL)


36
30
Ø622
52
ERD: 535

G52X36TL: 465±15g(T800 SL)
G52X36TL: 445±15g(T800 UL)

46mm Outer Width Road/Gravel Rims--Tubeless


46
35
Ø622
50
ERD:539

G50X46TL: 450±15g(T1000)


46
35
Ø622
60
ERD:519

G60X46TL: 500±15g(T1000)

Carbon MTB Rims--Tubeless Hookless-27.5 ER


27
22
Ø584
25
ERD:551

XC-M25X27HL-27.5: 345±15g(T800 SL)
XC-M25X27HL-27.5: 265±15g(T800 UL)


30
25
Ø584
22
ERD:557
2.60

XC-MA22X30HL-27.5: 345±15g(T800 SL)
XC-MA22X30HL-27.5: 295±15g(T800 UL)


33
26
Ø584
25
ERD:551
3.0000

AM-MA25X33HL-27.5: 360±15g (T800 SL)
XC-MA25X33HL-27.5: 320±15g (T800 UL)


40
34
Ø584
30
ERD:541

EN-M30X40HL-27.5: 460±15g (T800 SL)
AM-M30X40HL-27.5: 420±15g (T800 UL)

Carbon MTB Rims--Tubeless Hookless-29 ER


28
22
Ø622
22
ERD:595

XC-M22X28HL-29ER: 300±15g(T800 UL)


30
25
Ø622
22
ERD:595
2.6000

XC-MA22X30HL-29ER: 360±15g(T700 NL)
XC-MA22X30HL-29ER: 310±15g(T800 SL)
XC-MA22X30HL-29ER: 255±15g(T800 UL)


30
25
Ø622
22
ERD:595

XC-M22X30HL-29ER: 360±15g(T700 NL)
XC-M22X30HL-29ER: 310±15g(T800 SL)
XC-M22X30HL-29ER: 255±15g(T800 UL)


27
22
Ø622
25
ERD:589

XC-M25X27HL-29ER: 370±15g(T800 SL)
XC-M25X27HL-29ER: 285±15g(T800 UL)

Carbon MTB Rims--Tubeless Hookless-29 ER


36
30
Ø622
20
ERD:599
2.0000

XC-M20X36HL-29ER: 285±15g(T800 SL)


35
28
BSD:Ø622
25
ERD:599

AM-M25X35HL-29ER: 385±15g(T800 SL)


33
26
Ø622
25
ERD:589
3.0000

AM-MA25X33HL-29ER: 400±15g(T700 NL)
TR-MA25X33HL-29ER: 380±15g(T800 SL)
XC-MA25X33HL-29ER: 340±15g(T800 UL)


30
25
Ø622
25
ERD:589

XC-M25X30HL-29ER: 360±15g(T700 NL)
XC-M25X30HL-29ER: 310±15g(T800 SL)
XC-M25X30HL-29ER: 260±15g(T800 UL)

Carbon MTB Rims--Tubeless Hookless-29 ER


35
30
Ø622
25
ERD:589
2.6000

XC-MA25X35HL-29ER: 360±15g(T700 NL)
XC-MA25X35HL-29ER: 320±15g(T800 SL)
XC-MA25X35HL-29ER: 280±15g(T800 UL)


32
27
Ø622
28
ERD:583

XC-MA28X32HL-29ER: 380±15g(T800 SL)
XC-MA28X32HL-29ER: 330±15g(T800 UL)


36
30
Ø622
28
ERD:583

AM-M28X36HL-29ER: 435±15g(T800 SL)
XC-M28X36HL-29ER: 360±15g(T800 UL)


38
31
Ø622
28
ERD:583
3.0000

EN-MA28X38HL-29ER: 490±15g(T800 SL)
AM-MA28X38HL-29ER: 450±15g(T800 UL)

Carbon MTB Rims--Tubeless Hookless-29 ER


40
34
Ø622
28
ERD:583
3.5000

EN-MA28X40HL-29ER: 490±15g(T800 SL)
AM-MA28X40HL-29ER: 460±15g(T800 UL)


30
25
Ø622
30
ERD:579

XC-M30X30HL-29ER: 380±15g(T800 SL)
XC-M30X30HL-29ER: 345±15g(T800 UL)


34
28
Ø622
30
ERD:579

AM-M30X34HL-29ER: 435±15g(T800 SL)
XC-M30X34HL-29ER: 350±15g(T800 UL)


40
34
Ø622
30
ERD:579

EN-M30X40HL-29ER: 480±15g(T800 SL)
AM-M30X40HL-29ER: 440±15g(T800 UL)

32inch Carbon MTB XC/AM Rims


36
30
BSD:686
28
ERD:647

XC-M28X36TL-32": 530±15g(T700 NL)
AM-M28X36TL-32": 480±15g(T800 UL)


36
30
BSD:686
28
ERD:647

XC-M28X36HL-32": 530±15g(T700 NL)
AM-M28X36HL-32": 480±15g(T800 UL)

Carbon BMX Rims--Tubeless


25
18
Ø406
50
ERD:323


25
18
Ø451
50
ERD:368

BR50X25TL-20″ -406-UL: 320±15g(T700 NL)
BR50X25TL-20″ -406-UL: 290±15g(T800 UL)

BD50X25TL-20″ -406-UL: 320±15g(T700 NL)
BD50X25TL-20″ -406-UL: 290±15g(T800 UL)

BR50X25TL-20″ -451-UL: 355±15g(T700 NL)
BR50X25TL-20″ -451-UL: 320±15g(T800 UL)

BD50X25TL-20″ -451-UL: 355±15g(T700 NL)
BD50X25TL-20″ -451-UL: 320±15g(T800 UL)

Carbon Fatbike Rims--Tubeless


80
75
25
BSD:507
ERD:476

FB25X80-24ER: 580±15g


65
60
25
BSD:599
ERD:533

FB25X65-26ER: 600±15g


80
75
25
BSD:559
ERD:533

FB25X80-26ER: 680±15g


100
95
25
BSD:559
ERD:533

FB25X100-26ER: 750±15g


80
74
28
BSD:584
ERD:545

FB28X80-27.5ER: 615±15g


85
79
40
BSD:584
ERD:522

FB40X85-27.5ER: 660±15g