


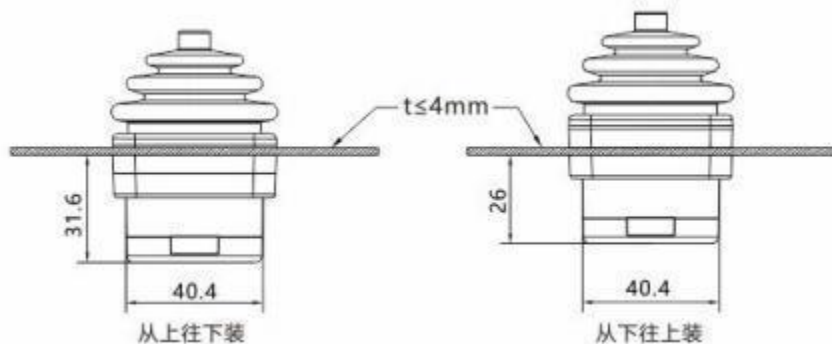
Strive to contribute to the  
promotion of the manufacturing  
foundation!

## Product Description Introduction

Product material number	3009C 0371	
product model	BD 9C -2AP -S -H 51-Z 2	
Model description	BD 9C Series, double axis cross direction operation, standard voltage (supply voltage 5V) input, Hall type (0~2.5~5V voltage output), Z2 handle (including the third axis, top 2 buttons), standard outlet.	
Product remarks		


## Mechanical mounting of the Mechanical Installation

Install the signal




Note: The standard screw is M 3 \* 16 cross screw

Operation direction definition

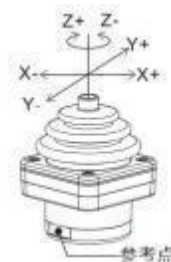


Install panel opening

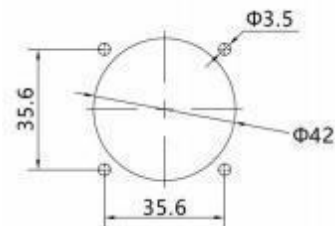

## Electrical installation of the Electrical Installation

Button signal

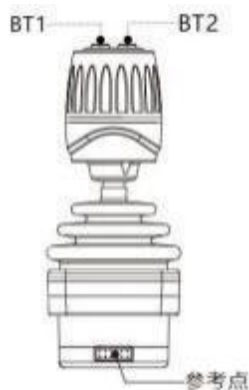

Wiring definition

pigment	function
black	Grounding, earth (GND)
red	5Vdc
yellow	X out
hispid arthraxon	Y out
blue	Z out
white	BT com
palm	BT 1
Purple from BT 2	



Shanghai Hualiangyi Precision Instrument Co.,  
LTD  
Tel :+86(0)21-33637517  
Mp :+86(0) 13641603191

Room 216, Building 37, No.333, Qinjiang Road, Xuhui  
District, Shanghai 200233  
Email :nimttefvn @126.com  
Http ://www .huacetek .com