

■ Due to the printing process,the colors of the actual products may differ from those pictures. For true color matching purposes please refer to lalale hardware ware chip color samples.



JIEYANG CITY LALALE INDUSTRY CO.,LTD.

☎ TEL:+86 18823552104/+86 18823551614

✉ E-mail:sasa@ficgoalhardware.com

🌐 <https://ficgoal.en.alibaba.com>

📍 Add:Xichang Town Workaround Jiedong District Jieyang City Guangdong



Quality Made by Craftsmanship
Quality for the World

Ficgoal Hardware series



Cabinet slides, hinges

LONG SERVICE LIFE

manufacturer Professional Furniture Hardware Manufacturer



COMPANY PROFILE

Jieyang City LALALE industry Co., Ltd. is located in Xichang workaroud Jiedong district Jieyang city, the company was established in 2006, the construction area of more than 40,000 square meters. The company has been committed to the research and development, manufacturing and sales of ball bearing slide and hinge series, products sold throughout the domestic and international market, has become the preferred supplier of many well-known enterprises at home and abroad, is Jieyang city high-end furniture hardware alliance standards, one of the first group of Chinese home hardware standards drafting units.

As a manufacturing enterprise, we have the international advanced production technology and production equipment, with high-quality professional technical team, and build a strong automated production system and more perfect, strict quality management system. The whole production process from raw material cutting, to parts stamping, molding, electroplating, assembly, packaging, shipping are completed in a one-stop way.

We uphold the harmony, mutual benefit, innovation, integrity of the business philosophy, the spirit of craftsman to do a good job in every process, do a good job in every product, efforts to provide better quality products for all walks of life, more personal customer service, looking forward to the future work, and you work together to achieve a win-win goal.



Company Introductionprofile

Professional hardware brand,
excellence in manufacturing technology
humanized design and high standard quality

We have advanced machinery and equipment, high-precision stamping equipment, fully automated equipment and related product development software, as well as various automatic testing instruments using advanced production processes, professional technicians, and R&D designers. The production mechanism makes full use of the human, machine, material, method, and environmental mechanisms to form a high-tech, high-quality, high-efficiency, rigorous and orderly production system.



Molding workshop



Molding workshop



Molding workshop

Company Strengths and Features



48 hour salt test machine

Our products are designed and manufactured using international advanced technology to ensure outstanding performance and stability.



50000 cycle test machine

With more than 20 years of production experience, we have a highly qualified and experienced production team and a perfect quality control mechanism.



Plating line

We are always very strict about quality, and each of our products undergoes multiple rigorous tests and quality checks.



Auto assemble machine

Our company adheres to the "customer-centered" business philosophy, our products and services have always been the starting point for the needs of customers.

Product Certificates

PASSED SGS
QUALITY TEST REPORT



Product of contents

PRODUCT
CATALOG



Furniture hardware undermount slide series

DMI-802SH 2 Fold soft closing undermount slide with handle	...09/10	DMI-803SH 3 Fold full extension soft-closing undermount slide with handle	...27/28
DMI-802SHD 2 Fold soft closing undermount slide with handle	...11/12	DMI-803SHD 3 Fold full extension soft-closing undermount slide with handle	...29/30
DMI-802SN 2 Fold soft closing undermount slide with adjustable rail	...13/14	DMI-803SN 3 Fold full extension soft-closing undermount slide with adjustable rail	...31/32
DMI-802SND 2 Fold soft closing undermount slide with adjustable rail	...15/16	DMI-803SND 3 Fold full extension soft-closing undermount slide with adjustable rail	...33/34
DMI-802PH 2 Fold push open undermount slide with handle	...17/18	DMI-803PH 3 Fold full extension push open undermount slide with handle	...35/36
DMI-802PHD 2 Fold push open undermount slide with handle	...19/20	DMI-803PHD 3 Fold full extension push open undermount slide with handle	...37/38
DMI-802PV 2 Fold push open undermount slide with adjustable rail	...21/22	DMI-803PV 3 Fold full extension push open undermount slide with adjustable rail	...39/40
DMI-802PHD 2 Fold push open undermount slide with adjustable rail	...23/24	DMI-803PHD 3 Fold full extension push open undermount slide with adjustable rail	...41/42
802 Installation Diagrams	...25/26	803 Series Bearing Hardware Installation Diagrams	...43/46
DMI-806SH 3 Fold full extension soft-closing undermount slide with handle	...47/48	DMI-806PH 3 Fold full extension push open undermount slide with adjustable rail	...59/60
DMI-806SHD 3 Fold full extension soft-closing undermount slide with adjustable rail	...49/50	DMI-806PHD 3 Fold full extension push open undermount slide with adjustable rail	...61/62
DMI-806SN 3 Fold full extension soft-closing undermount slide with adjustable rail	...51/52	DMI-806SNH 3 Fold full extension soft-closing undermount slide with handle	...63/64
DMI-806SND 3 Fold full extension soft-closing undermount slide with adjustable rail	...53/54	DMI-806SHD 3 Fold full extension push open undermount slide with adjustable rail	...65/66
DMI-806PH 3 Fold full extension push open undermount slide with handle	...55/56	DMI-810SHD 3 Fold full extension push open undermount slide with handle	...67/68
DMI-806PHD 3 Fold full extension push open undermount slide with handle	...57/58	DMI-810SHD 3 Fold full extension push open undermount slide with handle	...69/70

Furniture hardware slide series

LS4501 3 Fold ball bearing slide	...75	LS4510 3 Fold stainless steel ball bearing slide	...84
LS4502 3 Fold soft closing ball bearing slide	...76	LS4301 3 Fold Ball Bearing Slide	...85
LS4503 3 Fold soft closing ball bearing slide	...77	LS4201 3 Fold Ball Bearing Slide	...86
LS4504 3 Fold soft closing ball bearing slide	...78	LS4001 3 Fold Ball Bearing Slide	...87
LS4505 3 Fold push open ball bearing slide	...79	LS3801 3 Fold Ball Bearing Slide	...88
LS4506 3 Fold hook ball bearing slide	...80	LS3802 3 Fold bottoming ball bearing slide	...89
LS4507 3 Fold cabinet ball bearing slide	...81	LS3501 3 Fold Ball Bearing Slide	...90
LS4508 3 Fold bottoming ball bearing slide	...82	LS3201 3 Fold Ball Bearing Slide	...91
LS4509 3 Fold soft closing & bottoming ball bearing slide	...83		

Furniture hardware hinge series

LH2603 One way slide-on mini hinge	...94	LH363HS One way clip-on stainless steel hydraulic hinge	...105
LH2601 One way slide-on glass hinge	...95	LH363-2D One way clip-on 2D hydraulic hinge	...106
LH261 Two way slide-on hinge	...96	LH363-3D One way clip-on 3D hydraulic hinge	...107
LH261D Two way slide-on hinge	...97	LHS304 One way clip-on all steel can be installed in water hydraulic hinge	...108
LH263 Two way slide-on hinge	...98	LHS304 One way clip-on all steel can be installed in water hydraulic hinge	...109
LH351 One way slide-on hinge	...99	LH304/45/90/135 Two way angle hinge	...110
LH361 One way slide-on hydraulic hinge	...100	LH304/45H/90H/135H One way angle hydraulic hinge	...111
LH361K One way slide-on hydraulic hinge	...101	LH165 Two way 165 angle hinge	...112
LH363H One way clip-on hydraulic hinge	...102	LH165H One way angle hydraulic hinge	...113
LH361S One way slide-on stainless steel hydraulic hinge	...103	LH361LK Aluminum frame hinge	...114
LH363S One way clip-on stainless steel hydraulic hinge	...104	LHB4H B3/4 One way slide-on bridge hydraulic hinge	...115



UNDERMOUNTED SLIDE

Concealed Slide

Silent hidden slides for better drawer aesthetics

DMI-802SH





2 Fold soft closing undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 25kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/lower rail): 1.4X1.4mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

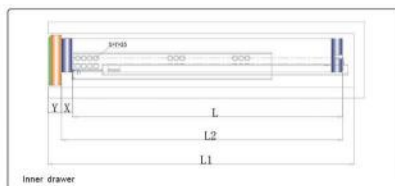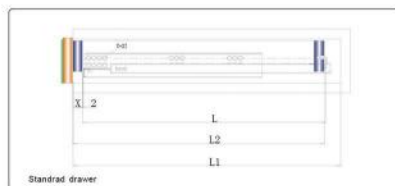

Installation of hole drawings

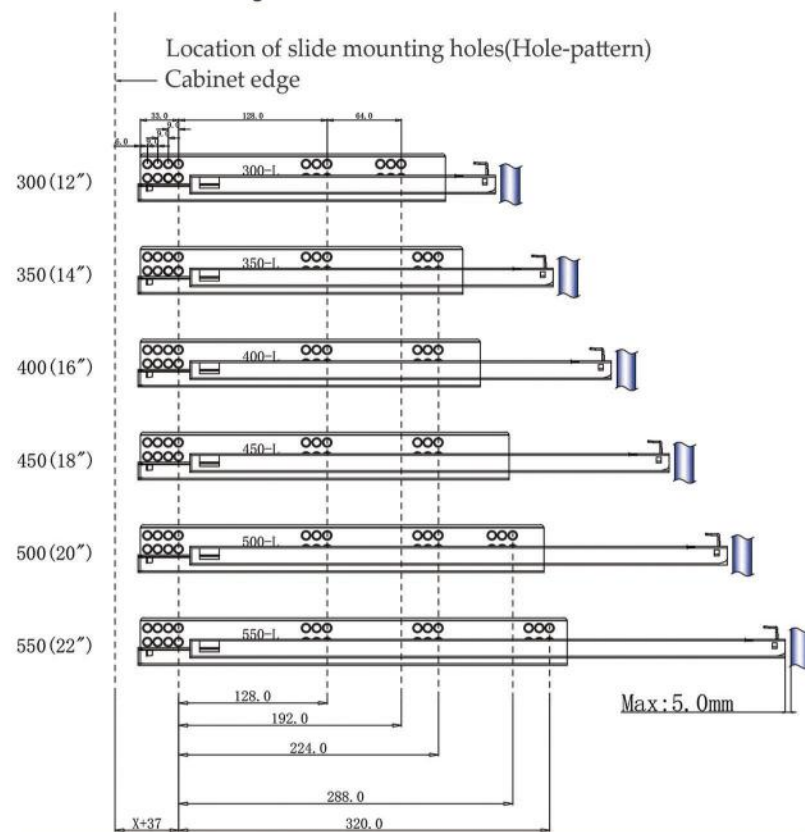

Item No	Normal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Cnt)
		Standrad Drawer	Inner Drawer		
DMI-802SH 12 "	300MM	$318+X^{+0.5}_{-0.0}$ /MM	$318+X+Y^{+0.5}_{-0.0}$ /MM	$300+X$ /MM	10
DMI-802SH 14 "	350MM	$368+X^{+0.5}_{-0.0}$ /MM	$368+X+Y^{+0.5}_{-0.0}$ /MM	$350+X$ /MM	10
DMI-802SH 16 "	400MM	$418+X^{+0.5}_{-0.0}$ /MM	$418+X+Y^{+0.5}_{-0.0}$ /MM	$400+X$ /MM	10
DMI-802SH 18 "	450MM	$468+X^{+0.5}_{-0.0}$ /MM	$468+X+Y^{+0.5}_{-0.0}$ /MM	$450+X$ /MM	10
DMI-802SH 20 "	500MM	$518+X^{+0.5}_{-0.0}$ /MM	$518+X+Y^{+0.5}_{-0.0}$ /MM	$500+X$ /MM	10
DMI-802SH 22 "	550MM	$568+X^{+0.5}_{-0.0}$ /MM	$568+X+Y^{+0.5}_{-0.0}$ /MM	$550+X$ /MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-802SHD






2 Fold soft closing undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 25kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 250mm-550mm (10"-22")
- Material thickness (upper/lower rail): 1.4X1.4mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

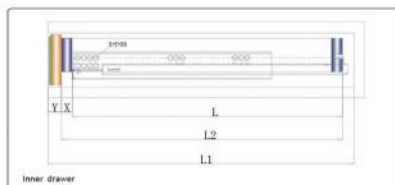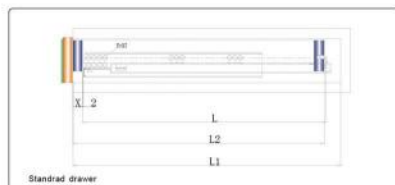

Installation of hole drawings

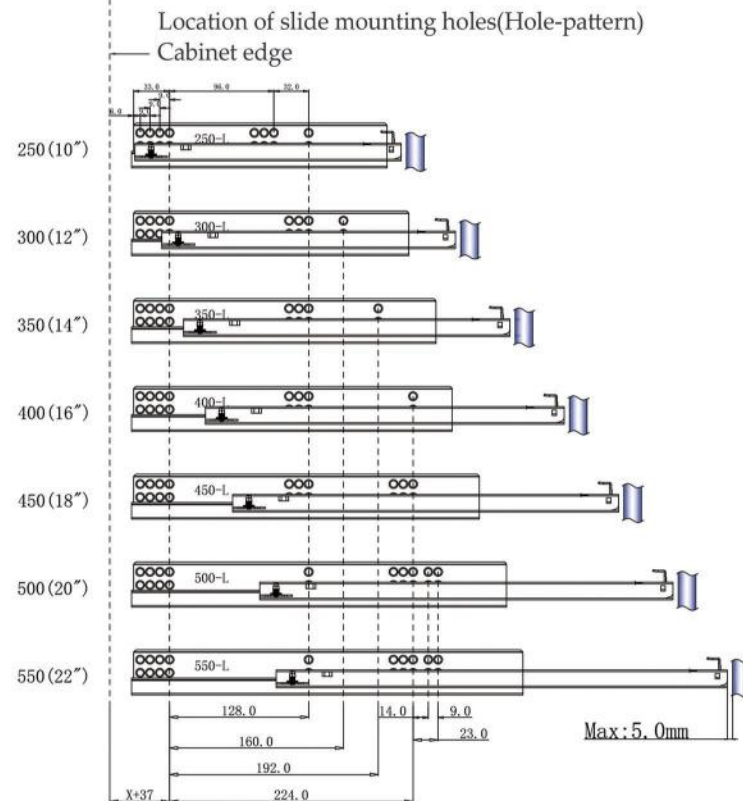

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Cnt)
		Standrad Drawer	Inner Drawer		
DMI-802SHD 12"	290MM	$308+X \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$308+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$290+X/\text{MM}$	10
DMI-802SHD 14"	340MM	$358+X \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$358+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$340+X/\text{MM}$	10
DMI-802SHD 16"	390MM	$408+X \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$408+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$390+X/\text{MM}$	10
DMI-802SHD 18"	440MM	$458+X \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$458+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$440+X/\text{MM}$	10
DMI-802SHD 20"	490MM	$508+X \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$508+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$490+X/\text{MM}$	10
DMI-802SHD 22"	540MM	$558+X \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$558+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$540+X/\text{MM}$	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-802SN






2 Fold soft closing undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 25kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-600mm (12" -22")
- Material thickness (upper/lower rail): 1.4X1.4mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

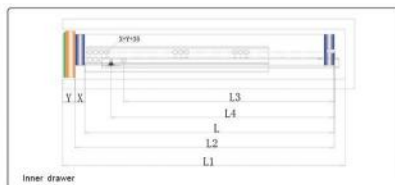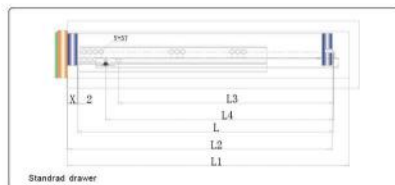

Installation of hole drawings

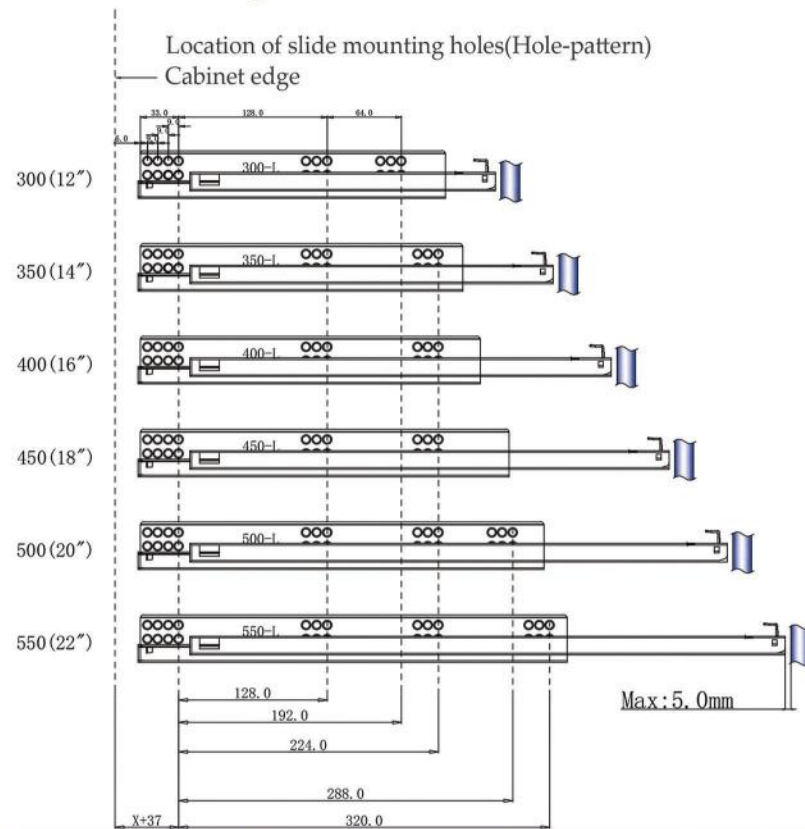

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Pin Hole L3	REGULATE Screw Hole size L4	Pinning (last 20)
		Standard Drawer	Inner Drawer				
DMI-802SN 12"	300MM	$318+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$318+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$300+X/\text{MM}$	236MM	256MM	10
DMI-802SN 14"	350MM	$368+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$368+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$350+X/\text{MM}$	286MM	306MM	10
DMI-802SN 16"	400MM	$418+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$418+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$400+X/\text{MM}$	336MM	356MM	10
DMI-802SN 18"	450MM	$468+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$468+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$450+X/\text{MM}$	386MM	406MM	10
DMI-802SN 20"	500MM	$518+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$518+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$500+X/\text{MM}$	436MM	456MM	10
DMI-802SN 22"	550MM	$568+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$568+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$550+X/\text{MM}$	486MM	506MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-802SND






2 Fold soft closing undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 25kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 250mm-550mm (12" -22")
- Material thickness (upper/lower rail): 1.4X1.4mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

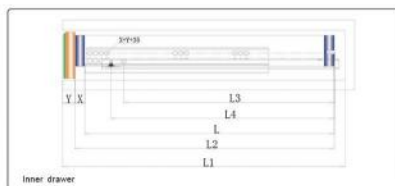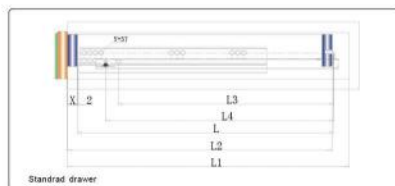

Installation of hole drawings

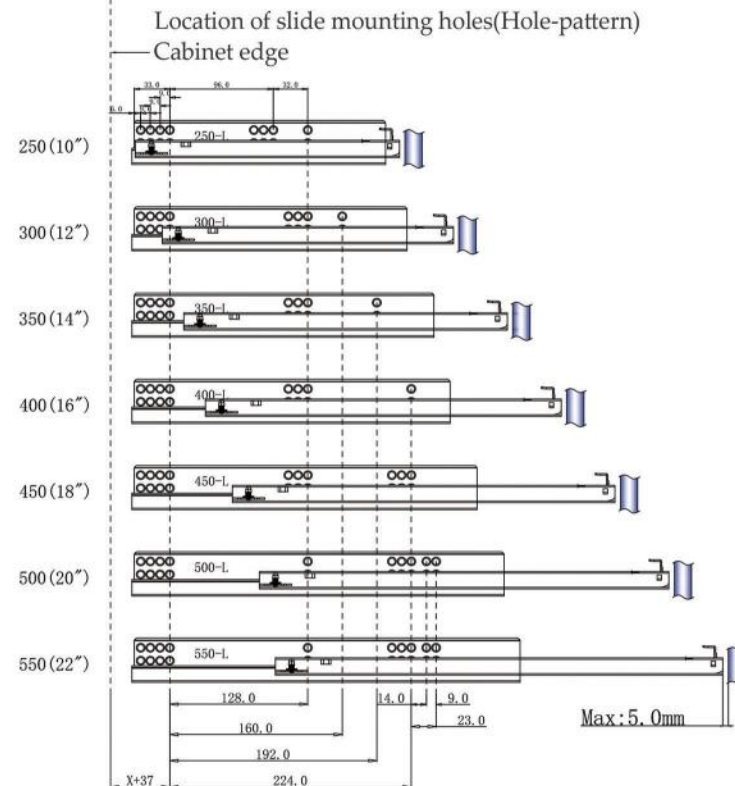

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Pin Hole L3	REGULATE Screw Hole size L4	Packing (Set/Box)
		Standard Drawer	Inner Drawer				
DMI-802SND 10"	240MM	258+X ^{+0.5} _{-0.0} /MM	258+X+Y ^{+0.5} _{-0.0} /MM	240+X/MM	220MM	188MM	10
DMI-802SND 12"	290MM	308+X ^{+0.5} _{-0.0} /MM	308+X+Y ^{+0.5} _{-0.0} /MM	290+X/MM	245MM	213MM	10
DMI-802SND 14"	340MM	358+X ^{+0.5} _{-0.0} /MM	358+X+Y ^{+0.5} _{-0.0} /MM	340+X/MM	270MM	238MM	10
DMI-802SND 16"	390MM	408+X ^{+0.5} _{-0.0} /MM	408+X+Y ^{+0.5} _{-0.0} /MM	390+X/MM	305MM	273MM	10
DMI-802SND 18"	440MM	458+X ^{+0.5} _{-0.0} /MM	458+X+Y ^{+0.5} _{-0.0} /MM	440+X/MM	330MM	298MM	10
DMI-802SND 20"	490MM	508+X ^{+0.5} _{-0.0} /MM	508+X+Y ^{+0.5} _{-0.0} /MM	490+X/MM	355MM	323MM	10
DMI-802SND 22"	540MM	558+X ^{+0.5} _{-0.0} /MM	558+X+Y ^{+0.5} _{-0.0} /MM	540+X/MM	390MM	358MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-802PH






2 Fold push open undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 25kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-600mm (12"-22")
- Material thickness (upper/lower rail): 1.4X1.4mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

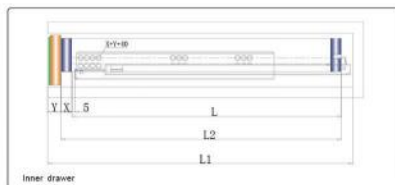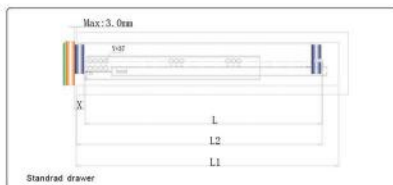

Installation of hole drawings

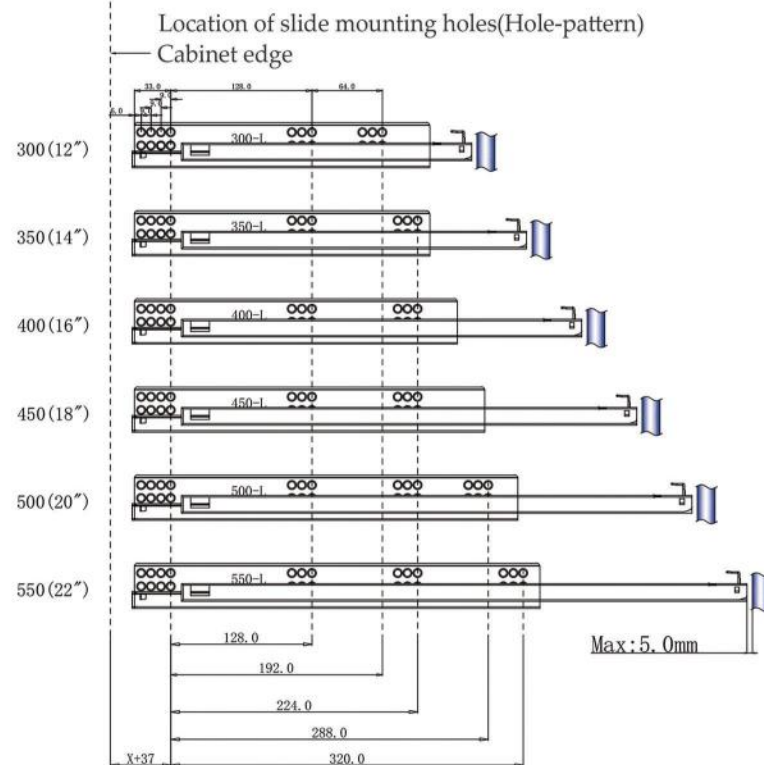

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Cnt)
		Standrad Drawer	Inner Drawer		
DMI-802PH 12 "	300MM	$318+X^{+0.5}_{-0.0}/\text{MM}$	$318+X+Y^{+0.5}_{-0.0}/\text{MM}$	$300+X/\text{MM}$	10
DMI-802PH 14 "	350MM	$368+X^{+0.5}_{-0.0}/\text{MM}$	$368+X+Y^{+0.5}_{-0.0}/\text{MM}$	$350+X/\text{MM}$	10
DMI-802PH 16 "	400MM	$418+X^{+0.5}_{-0.0}/\text{MM}$	$418+X+Y^{+0.5}_{-0.0}/\text{MM}$	$400+X/\text{MM}$	10
DMI-802PH 18 "	450MM	$468+X^{+0.5}_{-0.0}/\text{MM}$	$468+X+Y^{+0.5}_{-0.0}/\text{MM}$	$450+X/\text{MM}$	10
DMI-802PH 20 "	500MM	$518+X^{+0.5}_{-0.0}/\text{MM}$	$518+X+Y^{+0.5}_{-0.0}/\text{MM}$	$500+X/\text{MM}$	10
DMI-802PH 22 "	550MM	$568+X^{+0.5}_{-0.0}/\text{MM}$	$568+X+Y^{+0.5}_{-0.0}/\text{MM}$	$550+X/\text{MM}$	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-802PHD





2 Fold push open undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 25kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 250mm-550mm (12"-22")
- Material thickness (upper/lower rail): 1.4X1.4mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

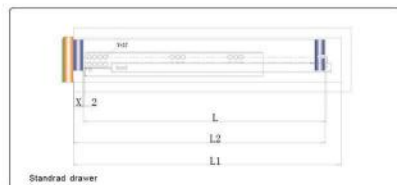

Installation of hole drawings

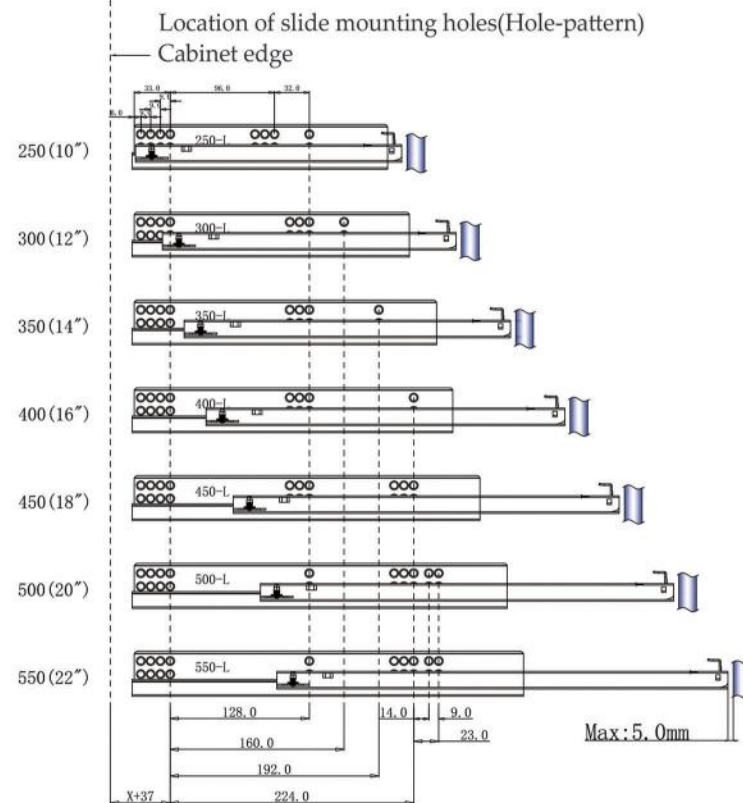

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Cnt)
		Standard Drawer	Inner Drawer		
DMI-802PHD 12"	290MM	$308+X^{+0.5}_{-0.0}$ /MM	$308+X+Y^{+0.5}_{-0.0}$ /MM	$290+X$ /MM	10
DMI-802PHD 14"	340MM	$358+X^{+0.5}_{-0.0}$ /MM	$358+X+Y^{+0.5}_{-0.0}$ /MM	$340+X$ /MM	10
DMI-802PHD 16"	390MM	$408+X^{+0.5}_{-0.0}$ /MM	$408+X+Y^{+0.5}_{-0.0}$ /MM	$390+X$ /MM	10
DMI-802PHD 18"	440MM	$458+X^{+0.5}_{-0.0}$ /MM	$458+X+Y^{+0.5}_{-0.0}$ /MM	$440+X$ /MM	10
DMI-802PHD 20"	490MM	$508+X^{+0.5}_{-0.0}$ /MM	$508+X+Y^{+0.5}_{-0.0}$ /MM	$490+X$ /MM	10
DMI-802PHD 22"	540MM	$558+X^{+0.5}_{-0.0}$ /MM	$558+X+Y^{+0.5}_{-0.0}$ /MM	$540+X$ /MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-802PN






2 Fold push open undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 25kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-600mm (12"-22")
- Material thickness (upper/lower rail): 1.4X1.4mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

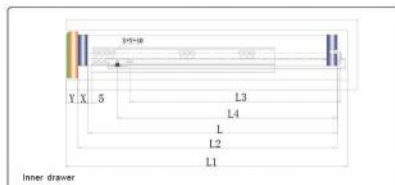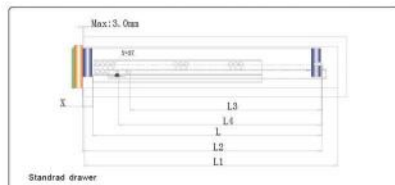

Installation of hole drawings

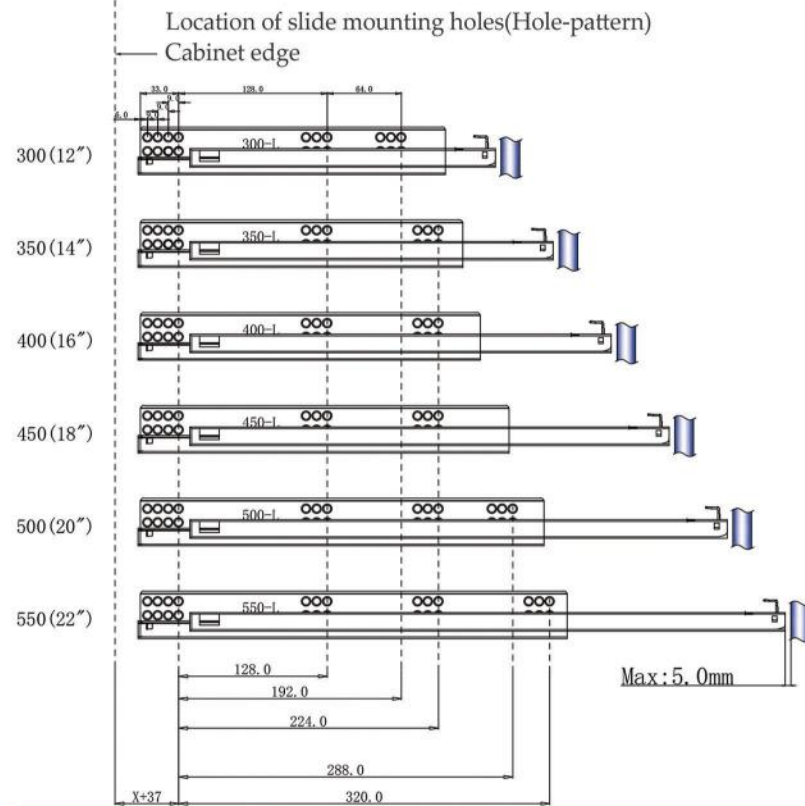

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Pin Hole L3	REGULATE Screw Hole size L4	Pin Hole L5
		Standard Drawer	Inner Drawer				
DMI-802PN 12"	300MM	$318 \pm X \pm 0.5 / \text{MM}$	$318 \pm X \pm Y \pm 0.5 / \text{MM}$	$300 \pm X / \text{MM}$	236MM	256MM	10
DMI-802PN 14"	350MM	$368 \pm X \pm 0.5 / \text{MM}$	$368 \pm X \pm Y \pm 0.5 / \text{MM}$	$350 \pm X / \text{MM}$	286MM	306MM	10
DMI-802PN 16"	400MM	$418 \pm X \pm 0.5 / \text{MM}$	$418 \pm X \pm Y \pm 0.5 / \text{MM}$	$400 \pm X / \text{MM}$	336MM	356MM	10
DMI-802PN 18"	450MM	$468 \pm X \pm 0.5 / \text{MM}$	$468 \pm X \pm Y \pm 0.5 / \text{MM}$	$450 \pm X / \text{MM}$	386MM	406MM	10
DMI-802PN 20"	500MM	$518 \pm X \pm 0.5 / \text{MM}$	$518 \pm X \pm Y \pm 0.5 / \text{MM}$	$500 \pm X / \text{MM}$	436MM	456MM	10
DMI-802PN 22"	550MM	$568 \pm X \pm 0.5 / \text{MM}$	$568 \pm X \pm Y \pm 0.5 / \text{MM}$	$550 \pm X / \text{MM}$	486MM	506MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-802PND


2 Fold push open undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 25kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 250mm-600mm (12"-24")
- Material thickness (upper/lower rail): 1.4X1.4mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

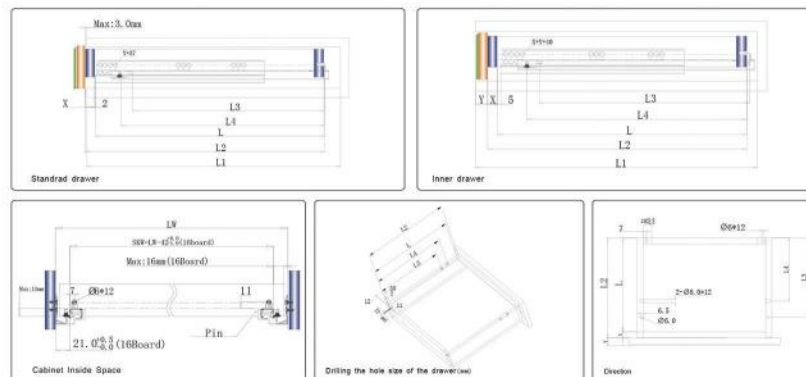

Installation of hole drawings

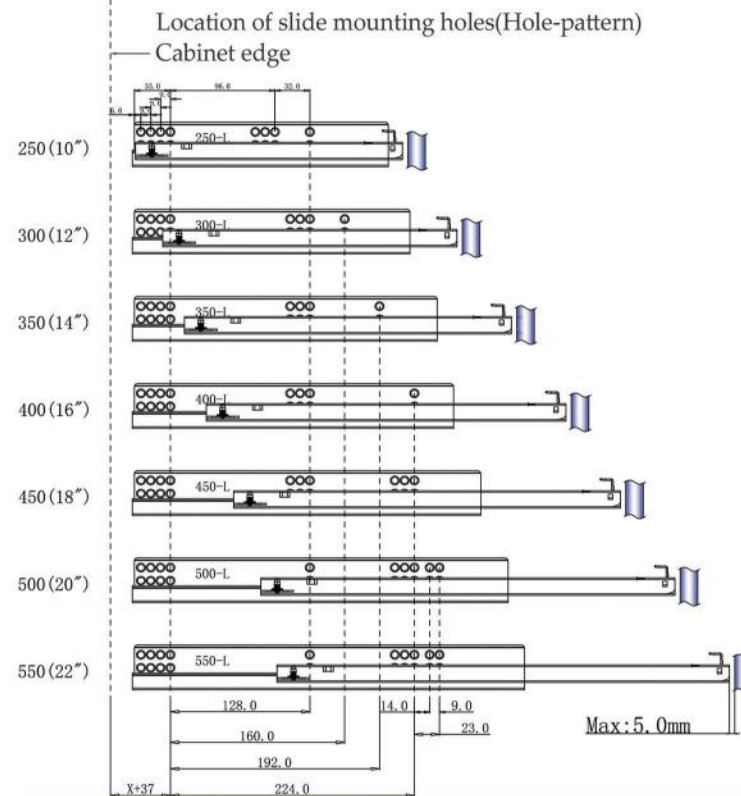

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Pin Hole L3	REGULATE Screw Hole side L4	Pin Hole L5
		Standard Drawer	Inner Drawer				
DMI-802PND 10"	240MM	258+X ^{+0.5} _{-0.0} /MM	258+X+Y ^{+0.5} _{-0.0} /MM	240+X/MM	169MM	221MM	10
DMI-802PND 12"	290MM	308+X ^{+0.5} _{-0.0} /MM	308+X+Y ^{+0.5} _{-0.0} /MM	290+X/MM	239MM	271MM	10
DMI-802PND 14"	340MM	358+X ^{+0.5} _{-0.0} /MM	358+X+Y ^{+0.5} _{-0.0} /MM	340+X/MM	289MM	321MM	10
DMI-802PND 16"	390MM	408+X ^{+0.5} _{-0.0} /MM	408+X+Y ^{+0.5} _{-0.0} /MM	390+X/MM	339MM	371MM	10
DMI-802PND 18"	440MM	458+X ^{+0.5} _{-0.0} /MM	458+X+Y ^{+0.5} _{-0.0} /MM	440+X/MM	389MM	421MM	10
DMI-802PND 20"	490MM	508+X ^{+0.5} _{-0.0} /MM	508+X+Y ^{+0.5} _{-0.0} /MM	490+X/MM	439MM	471MM	10
DMI-802PND 22"	540MM	558+X ^{+0.5} _{-0.0} /MM	558+X+Y ^{+0.5} _{-0.0} /MM	540+X/MM	489MM	521MM	10


Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

802 INSTALLATION DIAGRAM




1D Handle






1D Adjustable Slide Rail Installation

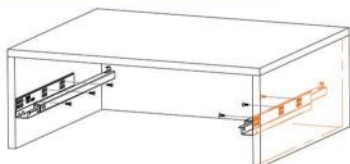

1: Use a Phillips screwdriver to install the slide rail. Use a Phillips screwdriver to install the slide rail.






2: Move the adjustment device. Use a Phillips screwdriver to install the front connector at the bottom of the drawer. Then move the adjustment device back to the designated position and tighten the screws.





3: Place the drawer on the movable rail of the slide rail, and then pull the movable rail to engage with the front connector. The installation is complete.

1D Adjustable Slide Rail Dismantling





Pull the buckle of the front connector, and then pull the drawer outwards to complete the dismantling.



Installation of Slide Rails with Adjusting Screws and Pins



Use a Phillips screwdriver to install the slide rails.





Pull out the movable rail (dynamic rail) from the slide rail, place the drawer on the slide rail, and snap it into the corresponding holes.



Press the fixing pin into the side panel of the drawer, fix the position of the drawer, and then push the drawer into the cabinet body. The installation is complete.

Dismantling of Slide Rails with Adjusting Screws and Pins

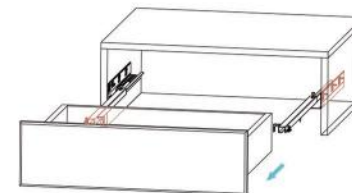

Pull out the fixing pin from the side panel of the drawer, lift the drawer and pull it out of the cabinet body to complete the dismantling.

DMI-803SH






3 Fold full extension soft-closing undermount slide with handle




-  Applicable drawer side panel thickness: 10mm-16mm
-  Maximum load: 35kg~45kg
-  Installation form: Bottom of the drawer
-  Material: Galvanized steel
-  Length: 300mm-550mm (12" -22")
-  Material thickness (upper/middle/lower rail) :1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width
LW=Internal Cabinet Width)

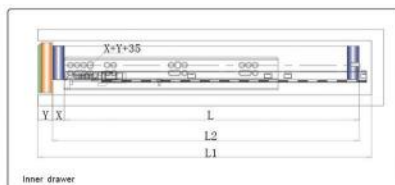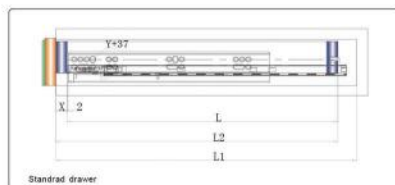

Installation of hole drawings

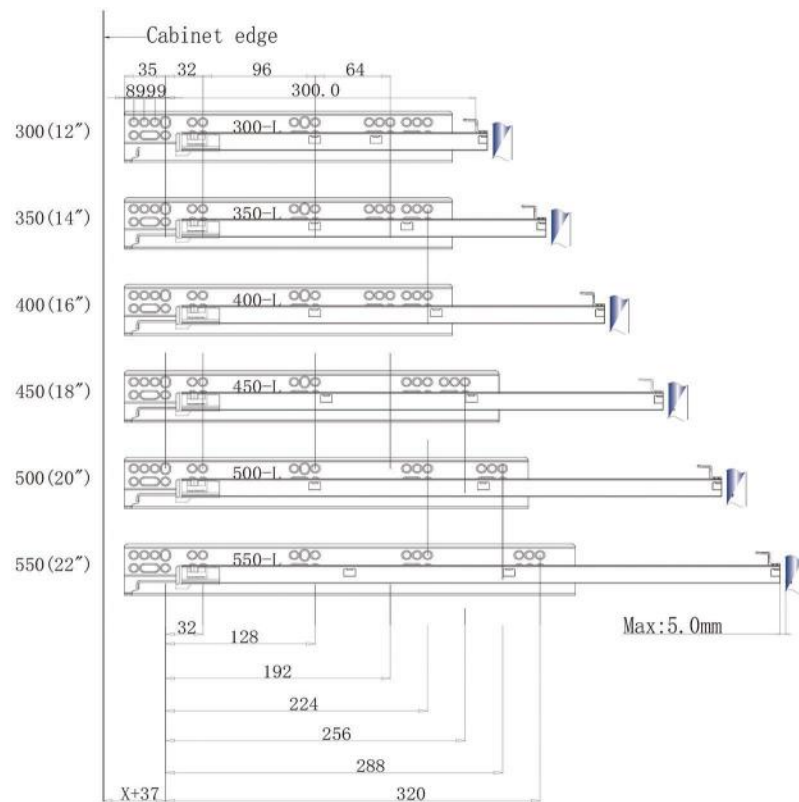

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing/Set/Case
		Standard Drawer	Inner Drawer		
DMI-803SH 12 °	300MM	318±X ^{+0.5} _{-0.0} /MM	318±X+Y ^{+0.5} _{-0.0} /MM	300±X/MM	10
DMI-803SH 14 °	350MM	368±X ^{+0.5} _{-0.0} /MM	368±X+Y ^{+0.5} _{-0.0} /MM	350±X/MM	10
DMI-803SH 16 °	400MM	418±X ^{+0.5} _{-0.0} /MM	418±X+Y ^{+0.5} _{-0.0} /MM	400±X/MM	10
DMI-803SH 18 °	450MM	468±X ^{+0.5} _{-0.0} /MM	468±X+Y ^{+0.5} _{-0.0} /MM	450±X/MM	10
DMI-803SH 20 °	500MM	518±X ^{+0.5} _{-0.0} /MM	518±X+Y ^{+0.5} _{-0.0} /MM	500±X/MM	10
DMI-803SH 22 °	550MM	568±X ^{+0.5} _{-0.0} /MM	568±X+Y ^{+0.5} _{-0.0} /MM	550±X/MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-803SHD






3 Fold full extension soft-closing undermount slide with handle



- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg~45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)


SKW=Internal Drawer Width
LW=Internal Cabinet Width)

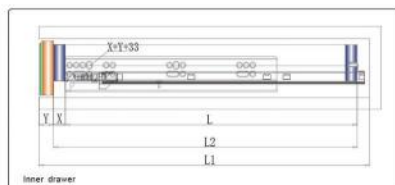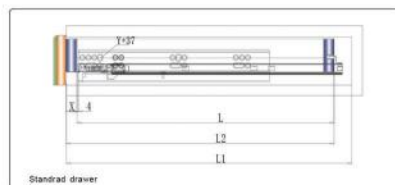

Installation of hole drawings

Location of slide mounting holes(Hole-pattern)

—Cabinet edge

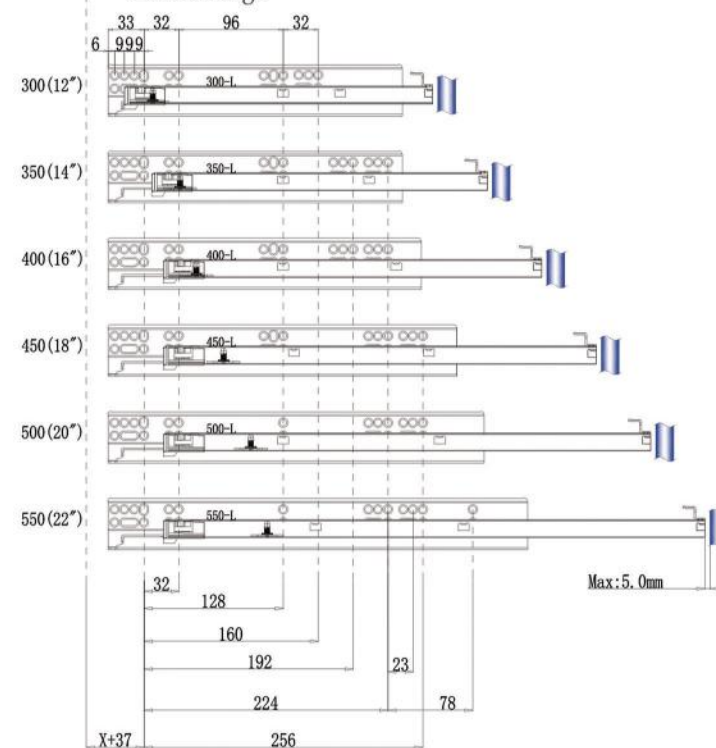

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing/Set/Case
		Standard Drawer	Inner Drawer		
DMI-803SHD 12"	290MM	308+X ^{+0.5} _{-0.0} /MM	300+X+Y ^{+0.5} _{-0.0} /MM	290+X/MM	10
DMI-803SHD 14"	340MM	358+X ^{+0.5} _{-0.0} /MM	358+X+Y ^{+0.5} _{-0.0} /MM	340+X/MM	10
DMI-803SHD 16"	390MM	408+X ^{+0.5} _{-0.0} /MM	408+X+Y ^{+0.5} _{-0.0} /MM	390+X/MM	10
DMI-803SHD 18"	440MM	458+X ^{+0.5} _{-0.0} /MM	458+X+Y ^{+0.5} _{-0.0} /MM	440+X/MM	10
DMI-803SHD 20"	490MM	508+X ^{+0.5} _{-0.0} /MM	508+X+Y ^{+0.5} _{-0.0} /MM	490+X/MM	10
DMI-803SHD 22"	540MM	558+X ^{+0.5} _{-0.0} /MM	558+X+Y ^{+0.5} _{-0.0} /MM	540+X/MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-803SN






3 Fold full extension soft-closing undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

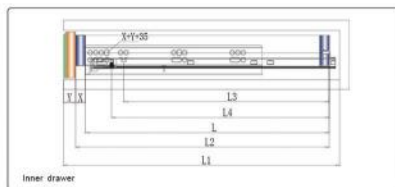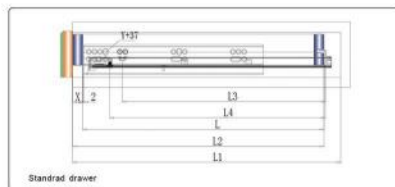

Installation of hole drawings

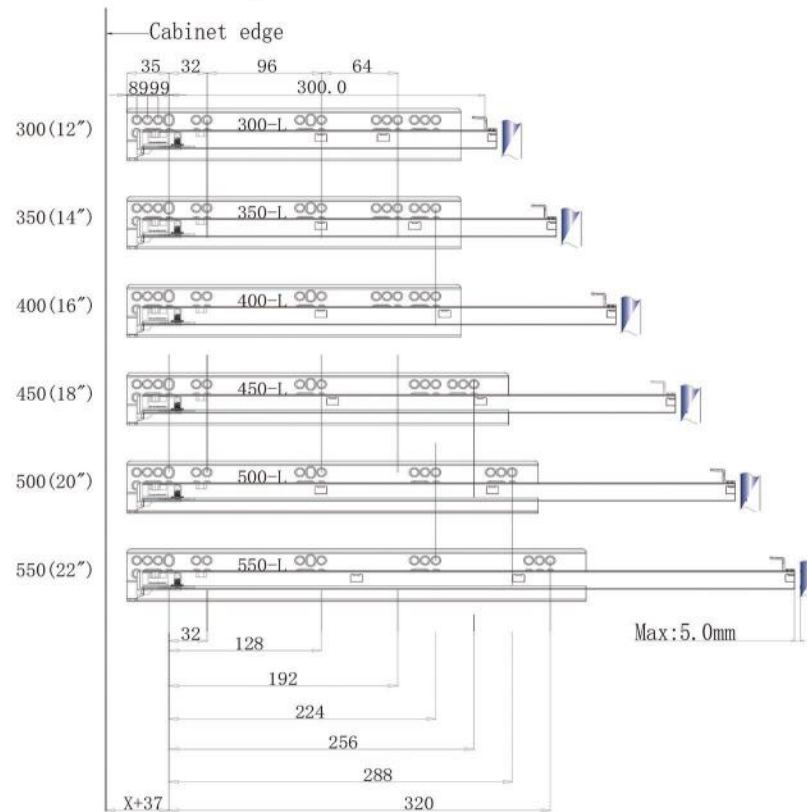

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Pin Hole L3	REGULATE Screw Hole size L4	Pinning (setcrew)
		Standard Drawer	Inner Drawer				
DMI-803SN 12"	300MM	$318+X_{-0.0}^{+0.5}/\text{MM}$	$318+X+Y_{-0.0}^{+0.5}/\text{MM}$	$300+X/\text{MM}$	256MM	236MM	10
DMI-803SN 14"	350MM	$368+X_{-0.0}^{+0.5}/\text{MM}$	$368+X+Y_{-0.0}^{+0.5}/\text{MM}$	$350+X/\text{MM}$	306MM	286MM	10
DMI-803SN 16"	400MM	$418+X_{-0.0}^{+0.5}/\text{MM}$	$418+X+Y_{-0.0}^{+0.5}/\text{MM}$	$400+X/\text{MM}$	356MM	336MM	10
DMI-803SN 18"	450MM	$468+X_{-0.0}^{+0.5}/\text{MM}$	$468+X+Y_{-0.0}^{+0.5}/\text{MM}$	$450+X/\text{MM}$	406MM	386MM	10
DMI-803SN 20"	500MM	$518+X_{-0.0}^{+0.5}/\text{MM}$	$518+X+Y_{-0.0}^{+0.5}/\text{MM}$	$500+X/\text{MM}$	456MM	436MM	10
DMI-803SN 22"	550MM	$568+X_{-0.0}^{+0.5}/\text{MM}$	$568+X+Y_{-0.0}^{+0.5}/\text{MM}$	$550+X/\text{MM}$	506MM	486MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-803SND


3 Fold full extension soft-closing undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)


SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

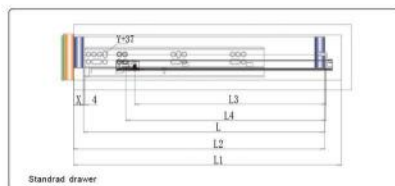


Standard drawer

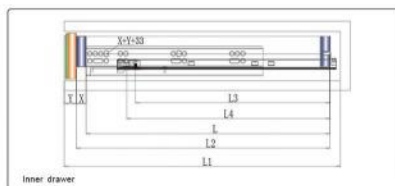


Inner drawer



Cabinet Inside Space




Drilling the hole size of the drawer(mm)



Direction

Installation of hole drawings

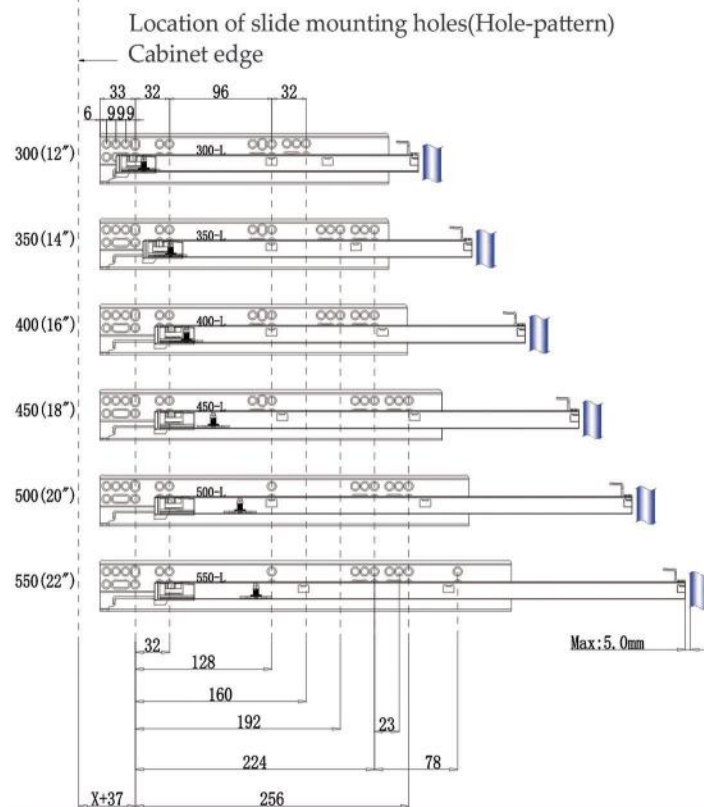

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	REGULATE Screw Hole size L3	Pin Hole L4	Pinning (unit:mm)
		Standard Drawer	Inner Drawer				
DMI-803SND 12"	290MM	308+X ^{+0.5} _{-0.0} /MM	308+X+Y ^{+0.5} _{-0.0} /MM	290+X/MM	245MM	255.5MM	10
DMI-803SND 14"	340MM	358+X ^{+0.5} _{-0.0} /MM	358+X+Y ^{+0.5} _{-0.0} /MM	340+X/MM	270MM	280.5MM	10
DMI-803SND 16"	390MM	408+X ^{+0.5} _{-0.0} /MM	408+X+Y ^{+0.5} _{-0.0} /MM	390+X/MM	305MM	319.5MM	10
DMI-803SND 18"	440MM	458+X ^{+0.5} _{-0.0} /MM	458+X+Y ^{+0.5} _{-0.0} /MM	440+X/MM	330MM	369.5MM	10
DMI-803SND 20"	490MM	508+X ^{+0.5} _{-0.0} /MM	508+X+Y ^{+0.5} _{-0.0} /MM	490+X/MM	355MM	419.5MM	10
DMI-803SND 22"	540MM	558+X ^{+0.5} _{-0.0} /MM	558+X+Y ^{+0.5} _{-0.0} /MM	540+X/MM	390MM	469.5MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-803PH






3 Fold full extension push open undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12"-22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

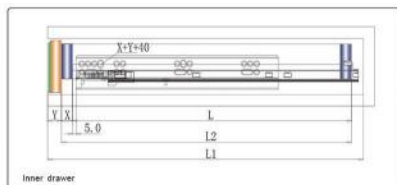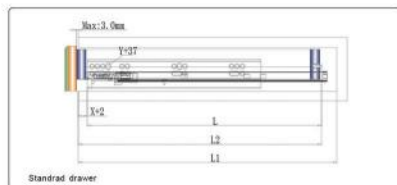

Installation of hole drawings

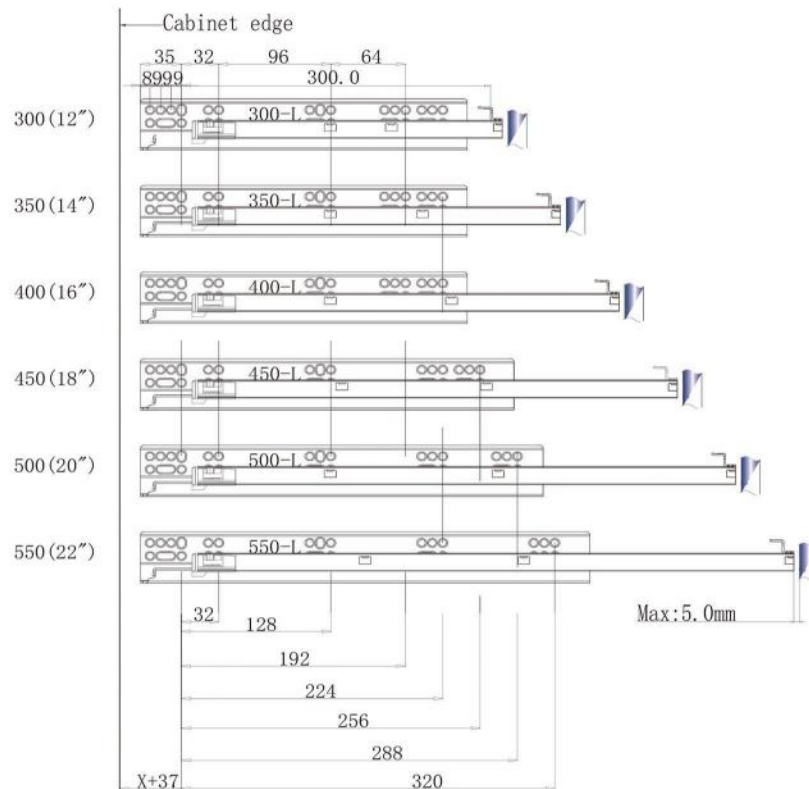

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Cnt)
		Standard Drawer	Inner Drawer		
DMI-803PH 12"	300MM	$318+X^{+0.5}_{-0.0}$ /MM	$318+X+Y^{+0.5}_{-0.0}$ /MM	300+X/MM	10
DMI-803PH 14"	350MM	$368+X^{+0.5}_{-0.0}$ /MM	$368+X+Y^{+0.5}_{-0.0}$ /MM	350+X/MM	10
DMI-803PH 16"	400MM	$418+X^{+0.5}_{-0.0}$ /MM	$418+X+Y^{+0.5}_{-0.0}$ /MM	400+X/MM	10
DMI-803PH 18"	450MM	$468+X^{+0.5}_{-0.0}$ /MM	$468+X+Y^{+0.5}_{-0.0}$ /MM	450+X/MM	10
DMI-803PH 20"	500MM	$518+X^{+0.5}_{-0.0}$ /MM	$518+X+Y^{+0.5}_{-0.0}$ /MM	500+X/MM	10
DMI-803PH 22"	550MM	$568+X^{+0.5}_{-0.0}$ /MM	$568+X+Y^{+0.5}_{-0.0}$ /MM	550+X/MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-803PHD

3 Fold full extension push open undermount slide with handle



- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg~45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm






Installation Dimensions(mm)

SKW=Internal Drawer Width


Y=Drawer plate thickness

LW=Internal Cabinet Width)

X=Drawer plate thickness

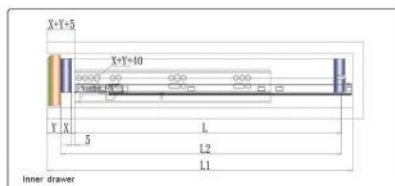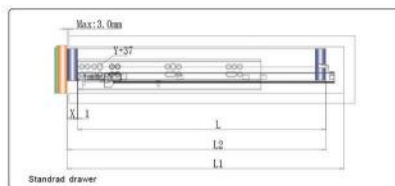

Installation of hole drawings

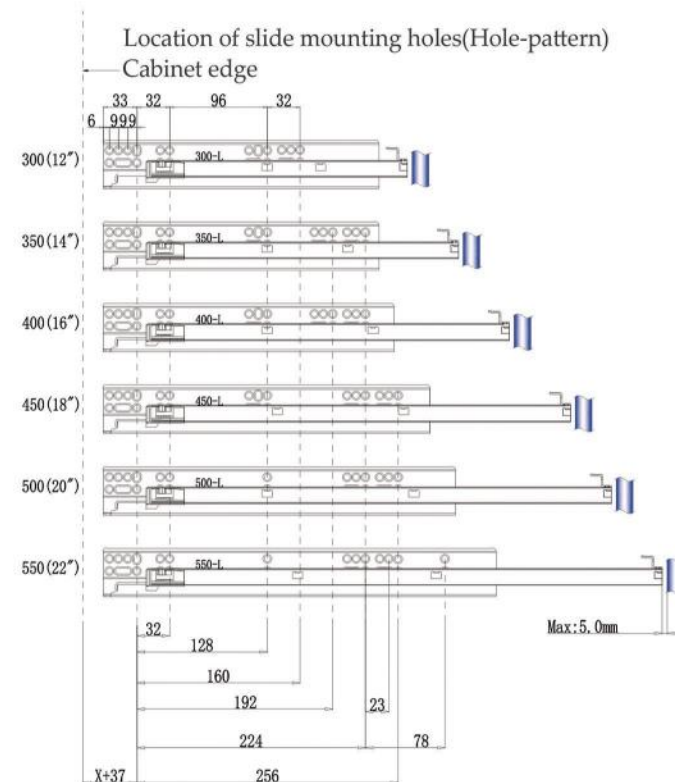

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing/Set/Case
		Standard Drawer	Inner Drawer		
DMI-803PHD 12"	290MM	308+X ^{+0.5} _{-0.0} /MM	308+X+Y ^{+0.5} _{-0.0} /MM	290+X/MM	10
DMI-803PHD 14"	340MM	358+X ^{+0.5} _{-0.0} /MM	358+X+Y ^{+0.5} _{-0.0} /MM	340+X/MM	10
DMI-803PHD 16"	390MM	408+X ^{+0.5} _{-0.0} /MM	408+X+Y ^{+0.5} _{-0.0} /MM	390+X/MM	10
DMI-803PHD 18"	440MM	458+X ^{+0.5} _{-0.0} /MM	458+X+Y ^{+0.5} _{-0.0} /MM	440+X/MM	10
DMI-803PHD 20"	490MM	508+X ^{+0.5} _{-0.0} /MM	508+X+Y ^{+0.5} _{-0.0} /MM	490+X/MM	10
DMI-803PHD 22"	540MM	558+X ^{+0.5} _{-0.0} /MM	558+X+Y ^{+0.5} _{-0.0} /MM	540+X/MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-803PN






3 Fold full extension push open undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

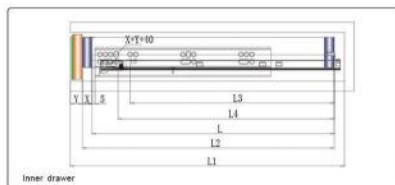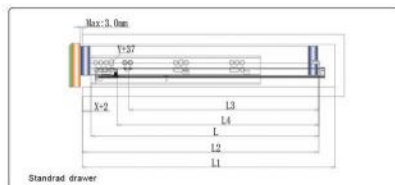

Installation of hole drawings

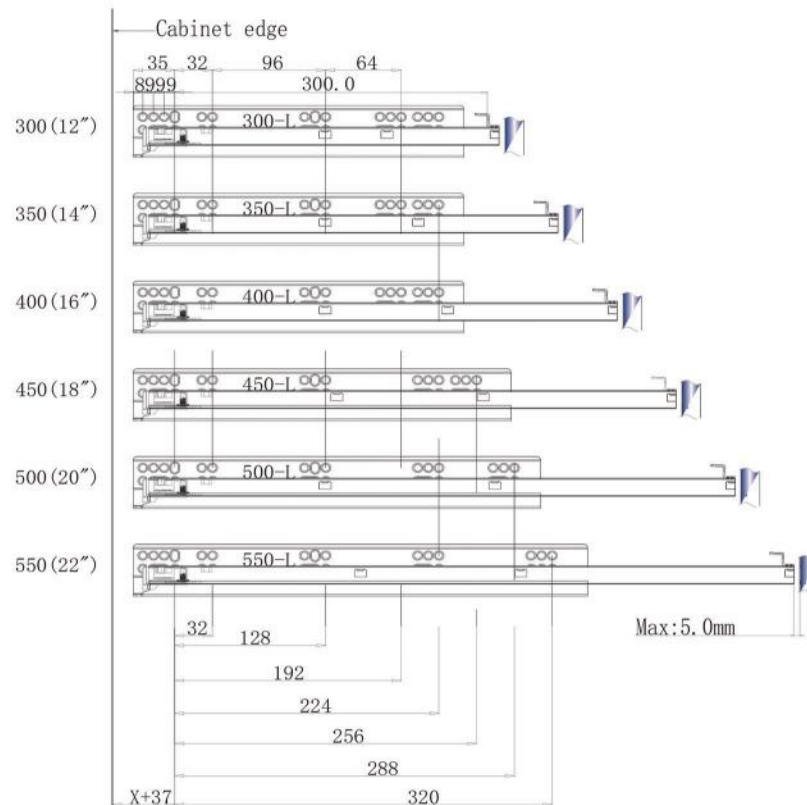

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Pin Hole L3	REGULATE Screw Hole size L4	Pinning (mm)
		Standard Drawer	Inner Drawer				
DMI-803PN 12"	300MM	318+X ^{+0.5} _{-0.0} /MM	318+X+Y ^{+0.5} _{-0.0} /MM	300+X/MM	256MM	236MM	10
DMI-803PN 14"	350MM	368+X ^{+0.5} _{-0.0} /MM	368+X+Y ^{+0.5} _{-0.0} /MM	350+X/MM	306MM	286MM	10
DMI-803PN 16"	400MM	418+X ^{+0.5} _{-0.0} /MM	418+X+Y ^{+0.5} _{-0.0} /MM	400+X/MM	356MM	336MM	10
DMI-803PN 18"	450MM	468+X ^{+0.5} _{-0.0} /MM	468+X+Y ^{+0.5} _{-0.0} /MM	450+X/MM	406MM	386MM	10
DMI-803PN 20"	500MM	518+X ^{+0.5} _{-0.0} /MM	518+X+Y ^{+0.5} _{-0.0} /MM	500+X/MM	456MM	436MM	10
DMI-803PN 22"	550MM	568+X ^{+0.5} _{-0.0} /MM	568+X+Y ^{+0.5} _{-0.0} /MM	550+X/MM	506MM	486MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-803PND






3 Fold full extension push open undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

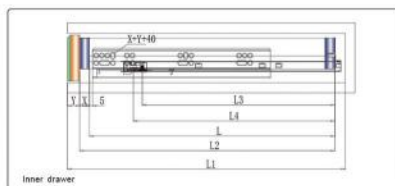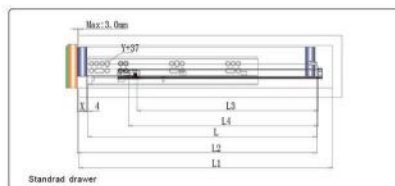

Installation of hole drawings

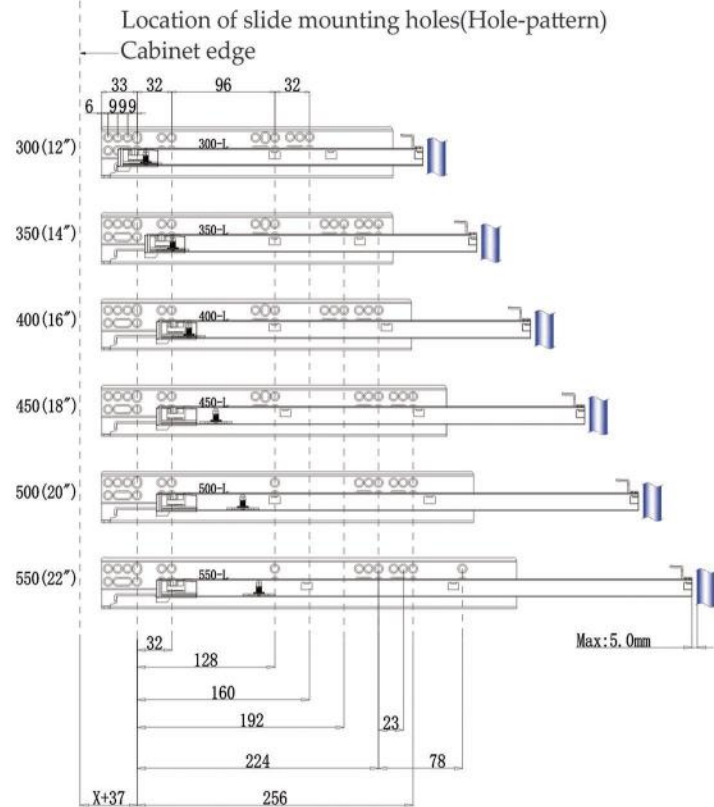

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	REGULATE SCREW Hole size L3	Pin Hole L4	Passing (mm)
		Standard Drawer	Inner Drawer				
DMI-803PND 12"	290MM	$308+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$308+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$290+X / \text{MM}$	245MM	255.5MM	10
DMI-803PND 14"	340MM	$358+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$358+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$340+X / \text{MM}$	270MM	280.5MM	10
DMI-803PND 16"	390MM	$408+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$408+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$390+X / \text{MM}$	305MM	319.5MM	10
DMI-803PND 18"	440MM	$458+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$458+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$440+X / \text{MM}$	330MM	369.5MM	10
DMI-803PND 20"	490MM	$508+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$508+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$490+X / \text{MM}$	355MM	419.5MM	10
DMI-803PND 22"	540MM	$558+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$558+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$540+X / \text{MM}$	390MM	469.5MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-803PND






3 Fold full extension push open undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

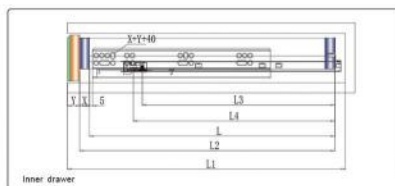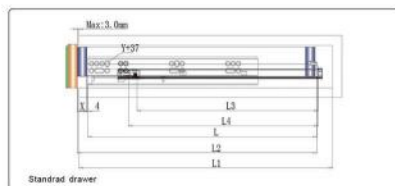

Installation of hole drawings

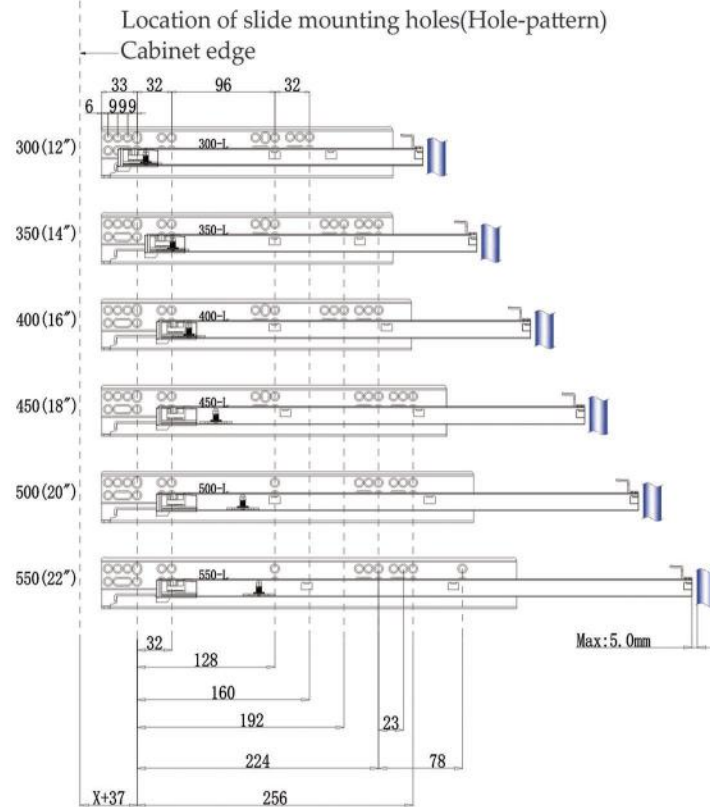

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	REGULATE SCREW Hole size L3	Pin Hole L4	Passing (mm)
		Standard Drawer	Inner Drawer				
DMI-803PND 12"	290MM	$308+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$308+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$290+X / \text{MM}$	245MM	255.5MM	10
DMI-803PND 14"	340MM	$358+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$358+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$340+X / \text{MM}$	270MM	280.5MM	10
DMI-803PND 16"	390MM	$408+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$408+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$390+X / \text{MM}$	305MM	319.5MM	10
DMI-803PND 18"	440MM	$458+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$458+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$440+X / \text{MM}$	330MM	369.5MM	10
DMI-803PND 20"	490MM	$508+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$508+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$490+X / \text{MM}$	355MM	419.5MM	10
DMI-803PND 22"	540MM	$558+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$558+X+Y \begin{smallmatrix} +0.5 \\ -0.0 \end{smallmatrix} / \text{MM}$	$540+X / \text{MM}$	390MM	469.5MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

803 SERIES MATCHING HANDLE

1D Handle



2D Handle




3D Handle




803 SERIES INSTALLATION DIAGRAM

3D Adjustable Slide Rail Installation

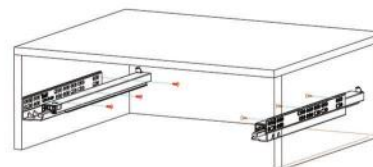

1: Use a Phillips screwdriver to install the slide rails as shown in the product installation diagram.



2: To move the adjustment unit, install the front connector on the bottom of the drawer with a Phillips screwdriver, then move the adjustment unit back to its designated position and lock the screws.



3: Place the drawer on top of the slide's movable rail and push the drawer to carry it into the cabinet. The movable rail snaps into the front connector and the installation is complete.


3D Adjustable Slide Rail Adjustment



Drawer panel up/down adjustment



Drawer panel left/right adjustment



Front and rear drawer adjustment


3D Adjustable Slide Rail Dismantling



Trigger the snap on the front connector and pull the drawer outward to complete removal.




2D Adjustable Slide Rail Installation

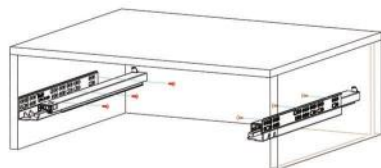

1: Use a Phillips screwdriver to install the slide rails as shown in the product installation diagram.



2: To move the adjustment unit, install the front connector on the bottom of the drawer with a Phillips screwdriver, then move the adjustment unit back to its designated position and lock the screws.

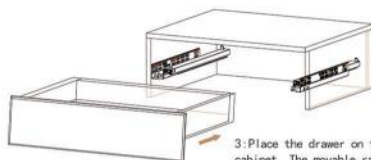

3: Place the drawer on top of the slide's movable rail and push the drawer to carry it into the cabinet. The movable rail snaps into the front connector and the installation is complete.



2D Adjustable Slide Rail Adjustment



Drawer panel up/down adjustment



Drawer panel left/right adjustment


2D Adjustable Slide Rail Dismantling




Trigger the snap on the front connector and pull the drawer outward to complete removal.



1D Adjustable Slide Rail Installation



1: Use a Phillips screwdriver to install the slide rails as shown in the product installation diagram.



2: To move the adjustment unit, install the front connector on the bottom of the drawer with a Phillips screwdriver, then move the adjustment unit back to its designated position and lock the screws.



3: Place the drawer on top of the slide's movable rail and push the drawer to carry it into the cabinet. The movable rail snaps into the front connector and the installation is complete.



1D Adjustable Slide Rail Adjustment



Drawer panel up/down adjustment





Trigger the snap on the front connector and pull the drawer outward to complete removal.




1D Adjustable Slide Rail Dismantling

Installation of Adjusting Nails with Tip Slides




Pull the movable (movable) rail out of the top of the slide. Place the drawer on top of the slide and snap into the corresponding hole.



Press the fixing pins into the side panels of the drawer to secure the drawer in place, then push the drawer into the cabinet to complete the installation.

Removal of Adjusting Nails with Tip Slides



Use a Phillips screwdriver to install the slide according to the mounting schematic.

Pull the fixing pins out of the side panels of the drawer, lift the drawer and pull the drawer out of the cabinet to complete the dismantling of the report.

DMI-806SH


3 Fold full extension soft-closing synchronous undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)


SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

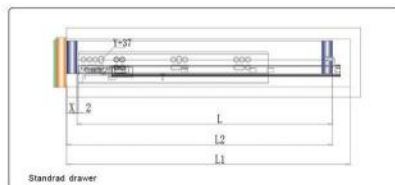


Standard drawer

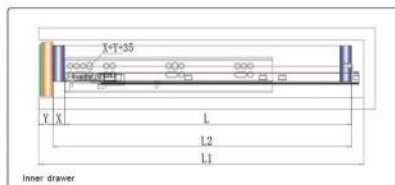


Inner drawer



Cabinet inside Space




Drilling the hole size of the drawer(mm)



Direction

Installation of hole drawings

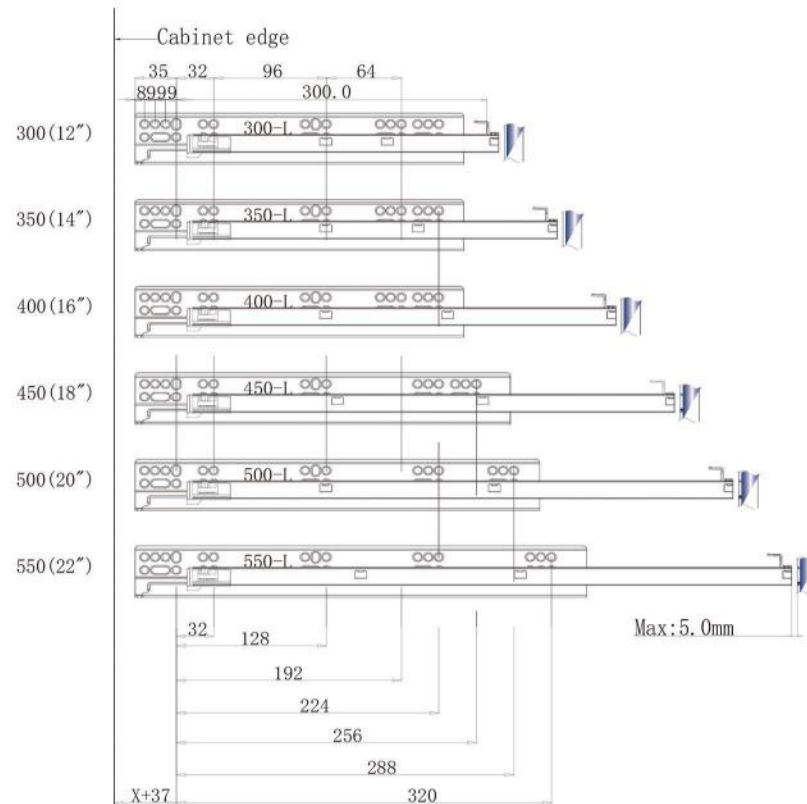

Item No	Normal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Cnt)
		Standard Drawer	Inner Drawer		
DMI-806SH 12 "	300MM	$318+X^{+0.5}_{-0.0}$ /MM	$318+X+Y^{+0.5}_{-0.0}$ /MM	$300+X$ /MM	10
DMI-806SH 14 "	350MM	$368+X^{+0.5}_{-0.0}$ /MM	$368+X+Y^{+0.5}_{-0.0}$ /MM	$350+X$ /MM	10
DMI-806SH 16 "	400MM	$418+X^{+0.5}_{-0.0}$ /MM	$418+X+Y^{+0.5}_{-0.0}$ /MM	$400+X$ /MM	10
DMI-806SH 18 "	450MM	$468+X^{+0.5}_{-0.0}$ /MM	$468+X+Y^{+0.5}_{-0.0}$ /MM	$450+X$ /MM	10
DMI-806SH 20 "	500MM	$518+X^{+0.5}_{-0.0}$ /MM	$518+X+Y^{+0.5}_{-0.0}$ /MM	$500+X$ /MM	10
DMI-806SH 22 "	550MM	$568+X^{+0.5}_{-0.0}$ /MM	$568+X+Y^{+0.5}_{-0.0}$ /MM	$550+X$ /MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-806SHD






3 Fold full extension soft-closing synchronous undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12"-22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

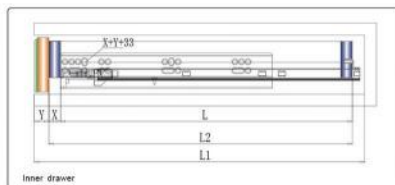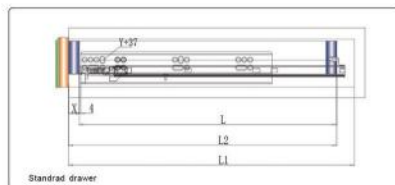

Installation of hole drawings

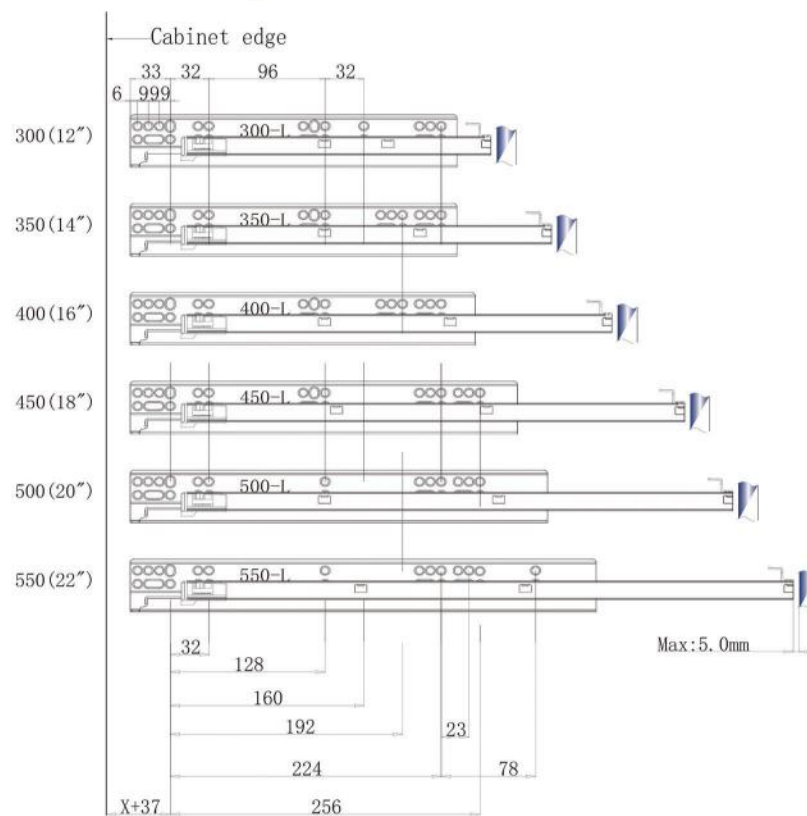

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Cnt)
		Standrad Drawer	Inner Drawer		
DMI-806SHD 12"	290MM	$308+X^{+0.5}_{-0.0}$ /MM	$308+X+Y^{+0.5}_{-0.0}$ /MM	290+X/MM	10
DMI-806SHD 14"	340MM	$358+X^{+0.5}_{-0.0}$ /MM	$358+X+Y^{+0.5}_{-0.0}$ /MM	340+X/MM	10
DMI-806SHD 16"	390MM	$408+X^{+0.5}_{-0.0}$ /MM	$408+X+Y^{+0.5}_{-0.0}$ /MM	390+X/MM	10
DMI-806SHD 18"	440MM	$458+X^{+0.5}_{-0.0}$ /MM	$458+X+Y^{+0.5}_{-0.0}$ /MM	440+X/MM	10
DMI-806SHD 20"	490MM	$508+X^{+0.5}_{-0.0}$ /MM	$508+X+Y^{+0.5}_{-0.0}$ /MM	490+X/MM	10
DMI-806SHD 22"	540MM	$558+X^{+0.5}_{-0.0}$ /MM	$558+X+Y^{+0.5}_{-0.0}$ /MM	540+X/MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-806SN

3 Fold full extension soft-closing synchronous undermount slide with adjustable nail



- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg~45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm






Installation Dimensions(mm)

SKW=Internal Drawer Width


Y=Drawer plate thickness

LW=Internal Cabinet Width)

X=Drawer plate thickness

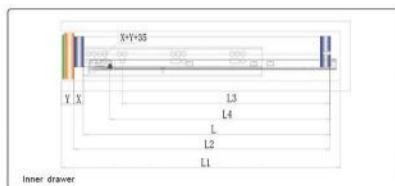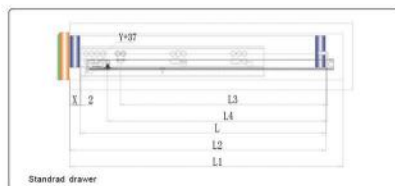

Installation of hole drawings

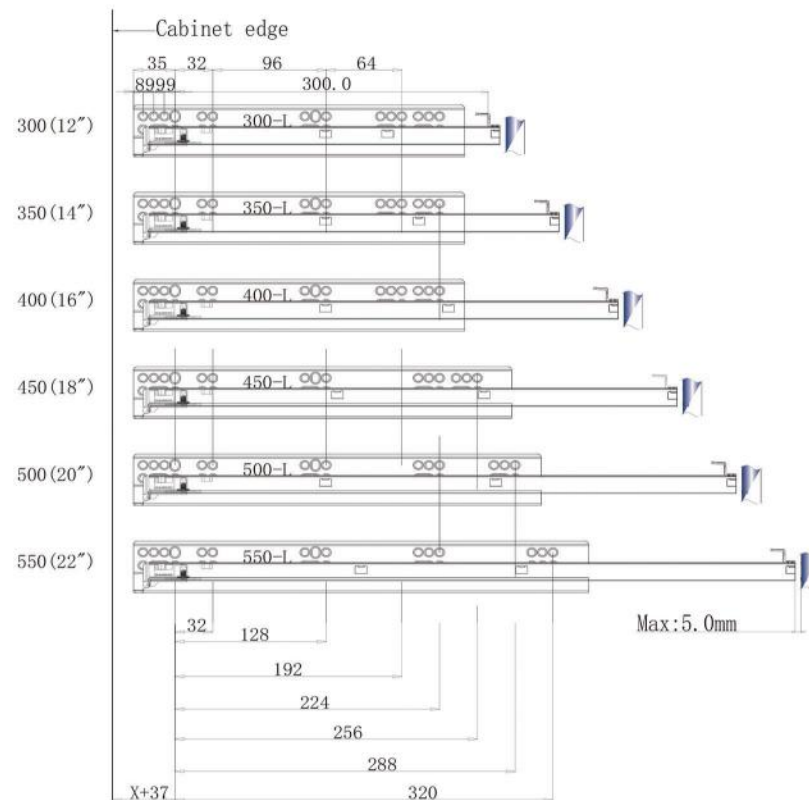

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Pin Hole L3	REGULATE Screw Hole size L4	Pin Hole L5
		Standard Drawer	Inner Drawer				
DMI-806SN 12"	300MM	318+X ^{+0.5 -0.6} /MM	318+X+Y ^{+0.5 -0.6} /MM	300+X/MM	256MM	236MM	10
DMI-806SN 14"	350MM	368+X ^{+0.5 -0.6} /MM	368+X+Y ^{+0.5 -0.6} /MM	350+X/MM	306MM	286MM	10
DMI-806SN 16"	400MM	418+X ^{+0.5 -0.6} /MM	418+X+Y ^{+0.5 -0.6} /MM	400+X/MM	356MM	336MM	10
DMI-806SN 18"	450MM	468+X ^{+0.5 -0.6} /MM	468+X+Y ^{+0.5 -0.6} /MM	450+X/MM	406MM	386MM	10
DMI-806SN 20"	500MM	518+X ^{+0.5 -0.6} /MM	518+X+Y ^{+0.5 -0.6} /MM	500+X/MM	456MM	436MM	10
DMI-806SN 22"	550MM	568+X ^{+0.5 -0.6} /MM	568+X+Y ^{+0.5 -0.6} /MM	550+X/MM	506MM	486MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-806SND


3 Fold full extension soft-closing synchronous undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12"-22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)


SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

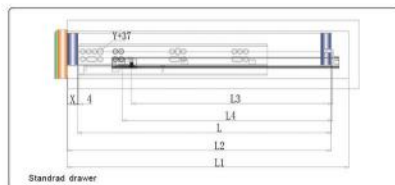


Standard drawer

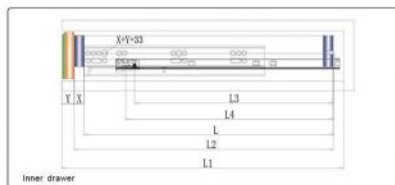


Inner drawer



Cabinet inside Space




Drilling the hole size of the drawer(mm)



Direction

Installation of hole drawings

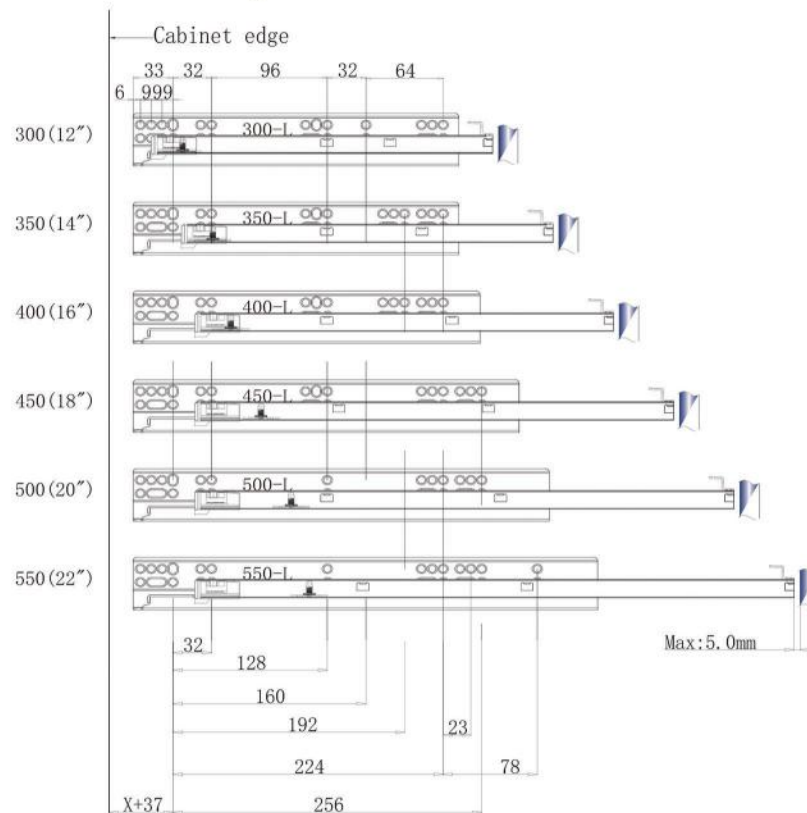

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	REGULATE Screw Hole size L3	Pin Hole L4	Pin Hole L5
		Standard Drawer	Inner Drawer				
DMI-806SND 12"	290MM	308+X ^{+0.5} _{-0.0} /MM	308+X+Y ^{+0.5} _{-0.0} /MM	290+X/MM	245MM	255.5MM	10
DMI-806SND 14"	340MM	358+X ^{+0.5} _{-0.0} /MM	358+X+Y ^{+0.5} _{-0.0} /MM	340+X/MM	270MM	280.5MM	10
DMI-806SND 16"	390MM	408+X ^{+0.5} _{-0.0} /MM	408+X+Y ^{+0.5} _{-0.0} /MM	390+X/MM	305MM	319.5MM	10
DMI-806SND 18"	440MM	458+X ^{+0.5} _{-0.0} /MM	458+X+Y ^{+0.5} _{-0.0} /MM	440+X/MM	330MM	369.5MM	10
DMI-806SND 20"	490MM	508+X ^{+0.5} _{-0.0} /MM	508+X+Y ^{+0.5} _{-0.0} /MM	490+X/MM	355MM	419.5MM	10
DMI-806SND 22"	540MM	558+X ^{+0.5} _{-0.0} /MM	558+X+Y ^{+0.5} _{-0.0} /MM	540+X/MM	390MM	469.5MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-806PH

3 Fold full extension push open synchronous undermount slide with handle



-  Applicable drawer side panel thickness: 10mm-16mm
-  Maximum load: 35kg~45kg
-  Installation form: Bottom of the drawer
-  Material: Galvanized steel
-  Length: 300mm-550mm (12" -22")
-  Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm





Installation Dimensions(mm)

SKW=Internal Drawer Width


Y=Drawer plate thickness

LW=Internal Cabinet Width)

X=Drawer plate thickness

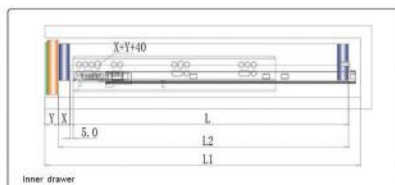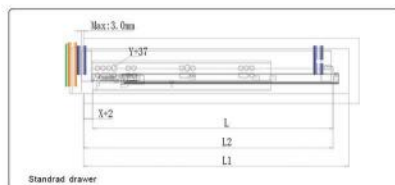

Installation of hole drawings

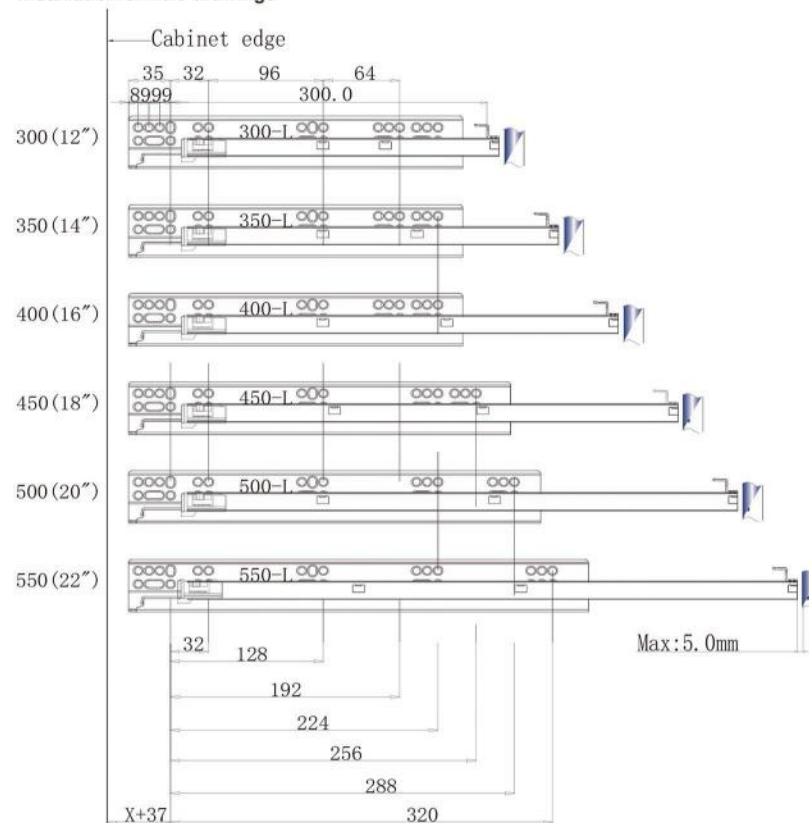

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Con)
		Standrad Drawer	Inner Drawer		
DMI-806PH 12 "	300MM	318+X ^{+0.5 -0.0} /MM	318+X+Y ^{+0.5 -0.0} /MM	300+X/MM	10
DMI-806PH 14 "	350MM	368+X ^{+0.5 -0.0} /MM	368+X+Y ^{+0.5 -0.0} /MM	350+X/MM	10
DMI-806PH 16 "	400MM	418+X ^{+0.5 -0.0} /MM	418+X+Y ^{+0.5 -0.0} /MM	400+X/MM	10
DMI-806PH 18 "	450MM	468+X ^{+0.5 -0.0} /MM	468+X+Y ^{+0.5 -0.0} /MM	450+X/MM	10
DMI-806PH 20 "	500MM	518+X ^{+0.5 -0.0} /MM	518+X+Y ^{+0.5 -0.0} /MM	500+X/MM	10
DMI-806PH 22 "	550MM	568+X ^{+0.5 -0.0} /MM	568+X+Y ^{+0.5 -0.0} /MM	550+X/MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-806PHD





3 Fold full extension push open synchronous undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12"-22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

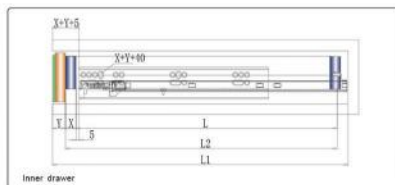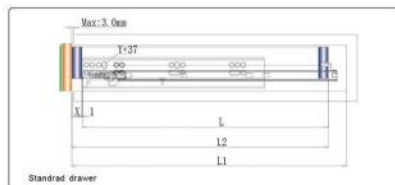

Installation of hole drawings

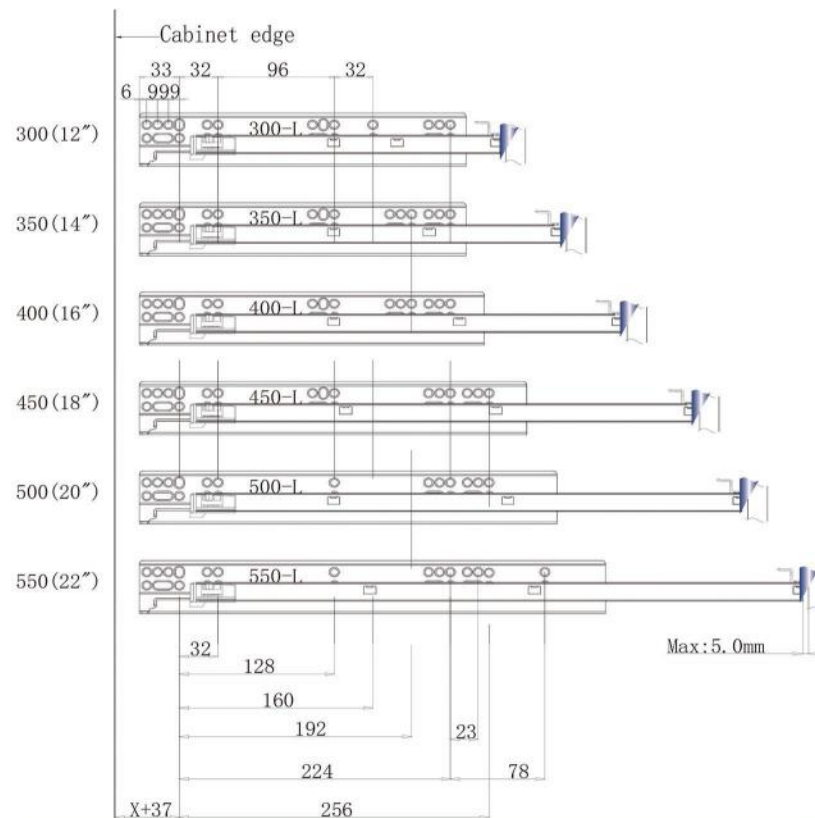

Item No	Normal length L	Cabinet inner Min depth L1		Drawer Hole L2	Packing(Set/Cnt)
		Standard Drawer	Inner Drawer		
DMI-806PHD 12"	290MM	$308+X^{+0.5}_{-0.0}$ /MM	$308+X+Y^{+0.5}_{-0.0}$ /MM	$290+X$ /MM	10
DMI-806PHD 14"	340MM	$358+X^{+0.5}_{-0.0}$ /MM	$358+X+Y^{+0.5}_{-0.0}$ /MM	$340+X$ /MM	10
DMI-806PHD 16"	390MM	$408+X^{+0.5}_{-0.0}$ /MM	$408+X+Y^{+0.5}_{-0.0}$ /MM	$390+X$ /MM	10
DMI-806PHD 18"	440MM	$458+X^{+0.5}_{-0.0}$ /MM	$458+X+Y^{+0.5}_{-0.0}$ /MM	$440+X$ /MM	10
DMI-806PHD 20"	490MM	$508+X^{+0.5}_{-0.0}$ /MM	$508+X+Y^{+0.5}_{-0.0}$ /MM	$490+X$ /MM	10
DMI-806PHD 22"	540MM	$558+X^{+0.5}_{-0.0}$ /MM	$558+X+Y^{+0.5}_{-0.0}$ /MM	$540+X$ /MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-806PN

3 Fold full extension push open synchronous undermount slide with adjustable nail



- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg~45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm






Installation Dimensions(mm)

SKW=Internal Drawer Width


Y=Drawer plate thickness

LW=Internal Cabinet Width)

X=Drawer plate thickness

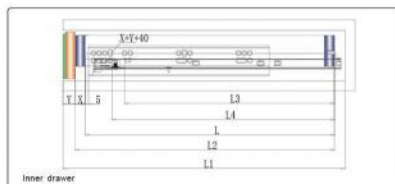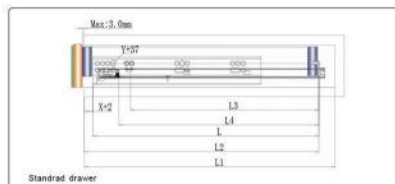

Installation of hole drawings

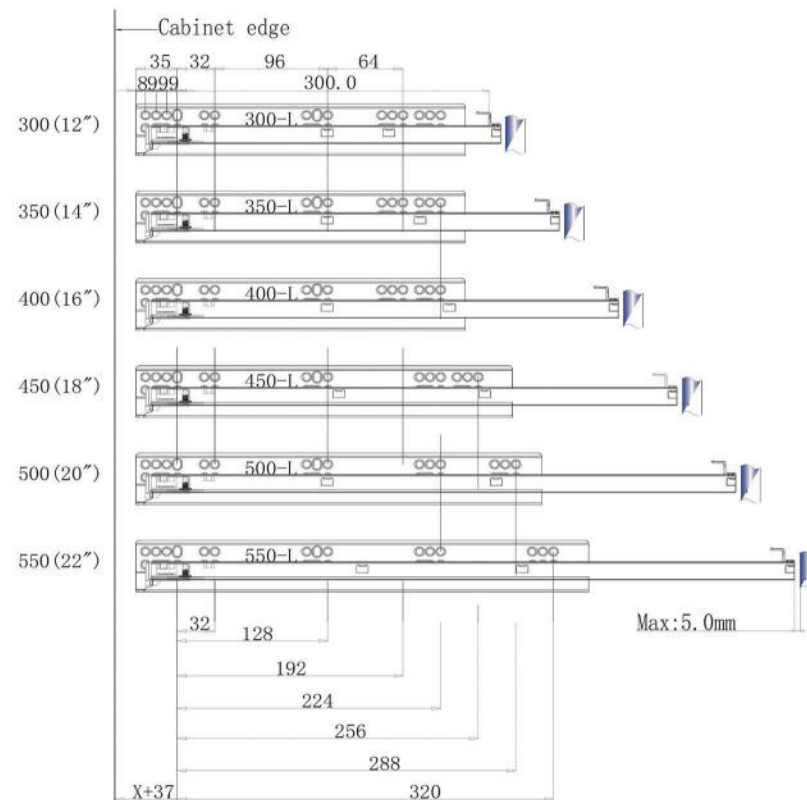

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	Pin Hole L3	REGULATE SCREWS SIZE L4	Pin Hole Depth
		Standard Drawer	Inner Drawer				
DMI-806PN 12"	300MM	318 $\times$ X ^{+0.5 -0.0} /MM	318 $\times$ X+Y ^{+0.5 -0.0} /MM	300 $\times$ X/MM	256MM	236MM	10
DMI-806PN 14"	350MM	368 $\times$ X ^{+0.5 -0.0} /MM	368 $\times$ X+Y ^{+0.5 -0.0} /MM	350 $\times$ X/MM	306MM	286MM	10
DMI-806PN 16"	400MM	418 $\times$ X ^{+0.5 -0.0} /MM	418 $\times$ X+Y ^{+0.5 -0.0} /MM	400 $\times$ X/MM	356MM	336MM	10
DMI-806PN 18"	450MM	468 $\times$ X ^{+0.5 -0.0} /MM	468 $\times$ X+Y ^{+0.5 -0.0} /MM	450 $\times$ X/MM	406MM	386MM	10
DMI-806PN 20"	500MM	518 $\times$ X ^{+0.5 -0.0} /MM	518 $\times$ X+Y ^{+0.5 -0.0} /MM	500 $\times$ X/MM	456MM	446MM	10
DMI-806PN 22"	550MM	568 $\times$ X ^{+0.5 -0.0} /MM	568 $\times$ X+Y ^{+0.5 -0.0} /MM	550 $\times$ X/MM	506MM	486MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-806PND






3 Fold full extension push open synchronous undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 300mm-550mm (12" -22")
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

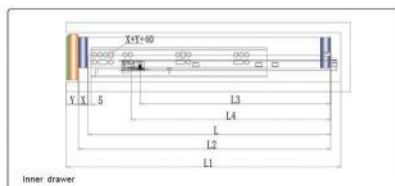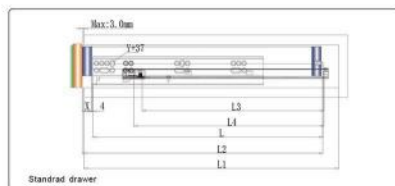

Installation of hole drawings

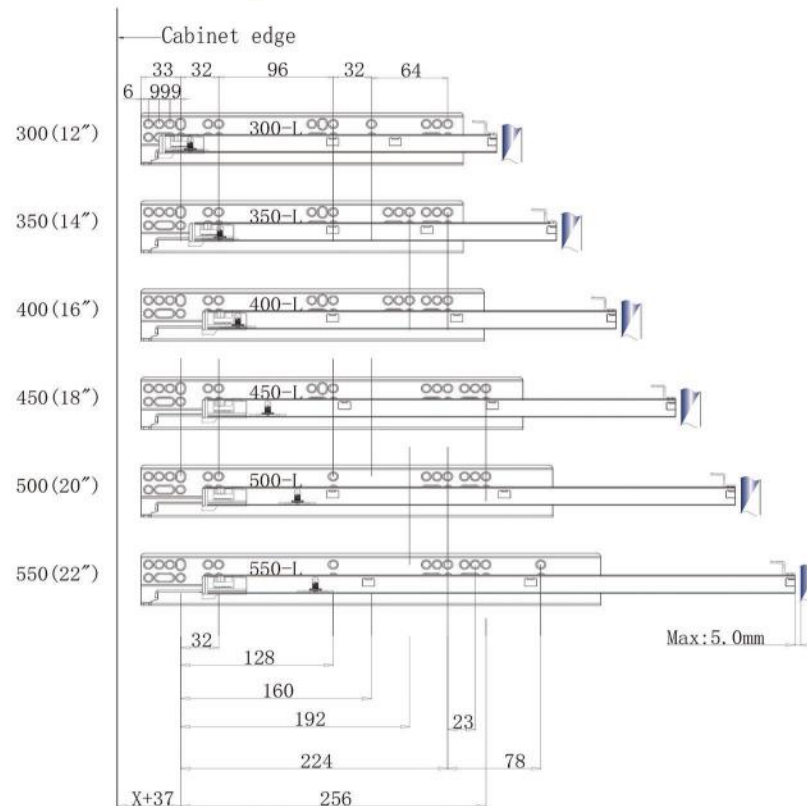

Item No	Nominal length L	Cabinet inner Min depth L1		Drawer Hole L2	REGULATE SCREW Hole size L3	Pin Hole L4	Pin Hole L5
		Standard Drawer	Inner Drawer				
DMI-806PND 12"	290MM	308+X ^{+0.5} _{-0.5} /MM	308+X+Y ^{+0.5} _{-0.5} /MM	290+X/MM	245MM	255.5MM	10
DMI-806PND 14"	340MM	358+X ^{+0.5} _{-0.5} /MM	358+X+Y ^{+0.5} _{-0.5} /MM	340+X/MM	270MM	280.5MM	10
DMI-806PND 16"	390MM	408+X ^{+0.5} _{-0.5} /MM	408+X+Y ^{+0.5} _{-0.5} /MM	390+X/MM	305MM	319.5MM	10
DMI-806PND 18"	440MM	458+X ^{+0.5} _{-0.5} /MM	458+X+Y ^{+0.5} _{-0.5} /MM	440+X/MM	330MM	369.5MM	10
DMI-806PND 20"	490MM	508+X ^{+0.5} _{-0.5} /MM	508+X+Y ^{+0.5} _{-0.5} /MM	490+X/MM	355MM	419.5MM	10
DMI-806PND 22"	540MM	558+X ^{+0.5} _{-0.5} /MM	558+X+Y ^{+0.5} _{-0.5} /MM	540+X/MM	390MM	469.5MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-809SHD






US 3 fold full extension soft closing undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 15" 18" 21" 24"
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

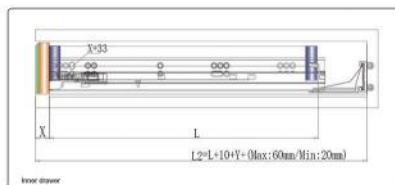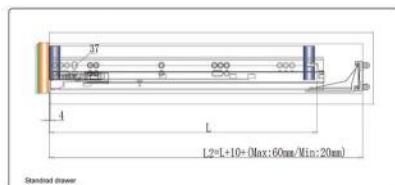

Installation of hole drawings

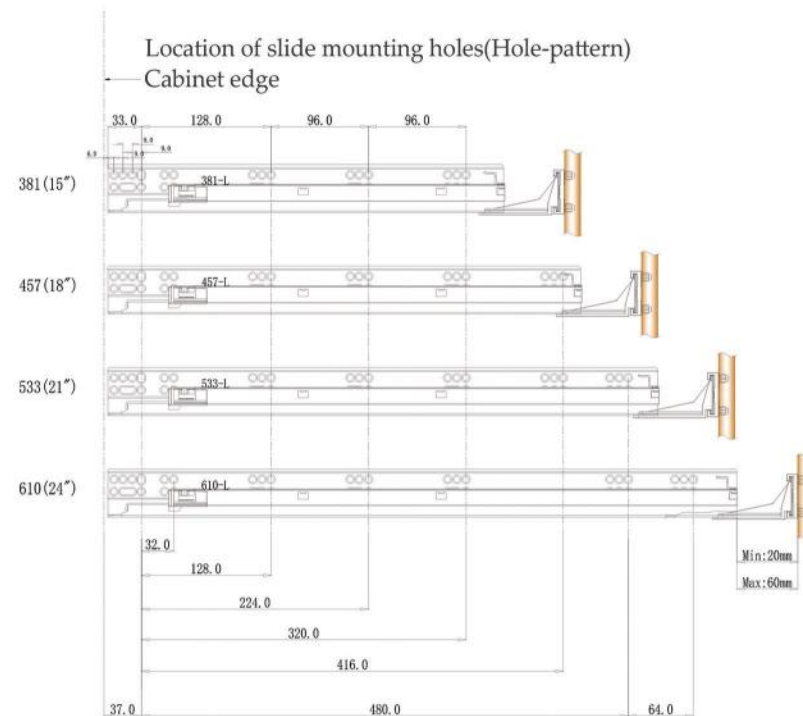

Item No	Nominal length L	Cabinet inner Min depth L2				Drawer Hole L1	Packing/Set/Cnt
		Standard Drawer		Inner Drawer			
		Max	Min	Max	Min		
DMI-809SHD 15"	381MM	451 ^{+0.5} _{-0.0} MM	411 ^{+0.5} _{-0.0} MM	451 ^{+0.5} _{-0.0} MM	411 ^{+0.5} _{-0.0} MM	381.0MM	10
DMI-809SHD 18"	457MM	528 ^{+0.5} _{-0.0} MM	488 ^{+0.5} _{-0.0} MM	528 ^{+0.5} _{-0.0} MM	488 ^{+0.5} _{-0.0} MM	457.0MM	10
DMI-809SHD 21"	533MM	605 ^{+0.5} _{-0.0} MM	563 ^{+0.5} _{-0.0} MM	605 ^{+0.5} _{-0.0} MM	563 ^{+0.5} _{-0.0} MM	533.0MM	10
DMI-809SHD 24"	610MM	680 ^{+0.5} _{-0.0} MM	640 ^{+0.5} _{-0.0} MM	680 ^{+0.5} _{-0.0} MM	640 ^{+0.5} _{-0.0} MM	610.0MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-809SND






US 3 fold full extension soft closing undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 15" 18" 21"
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

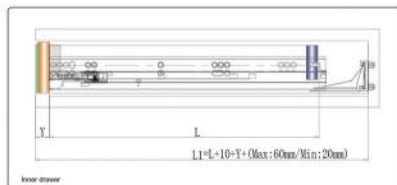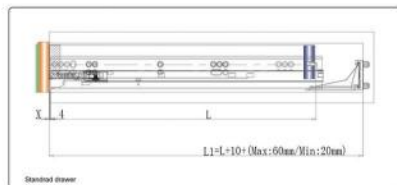

Installation of hole drawings

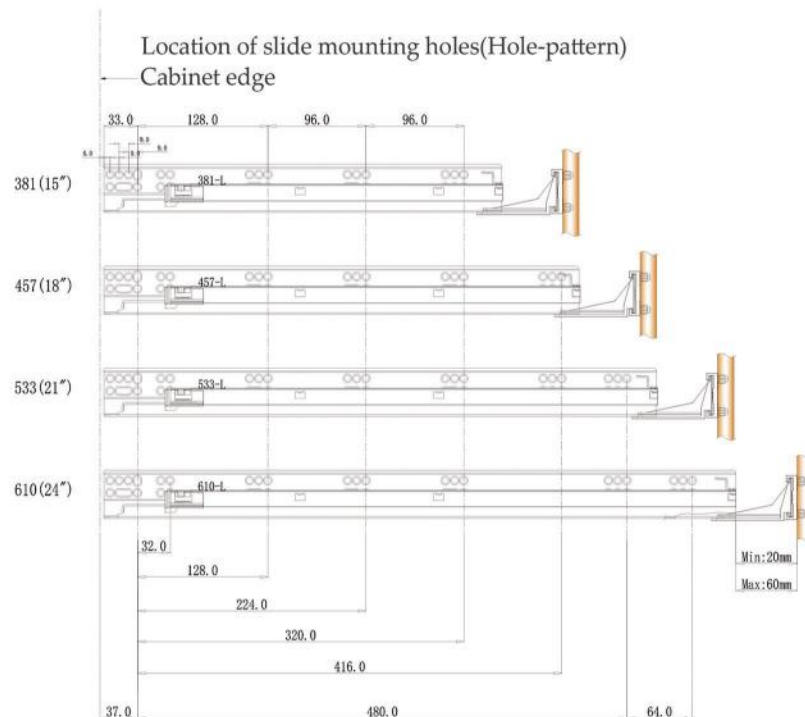

Item No	Nominal length L	Cabinet inner Min depth L1				Nominal length L2	REGULATE screw Max size L3	Fix Hole L4	Parting section
		Standard Drawer		Inner Drawer					
		Max	Min	Max	Min				
DMI-809SND 15"	381MM	451 ^{+0.5} _{-0.0} MM	411 ^{+0.5} _{-0.0} MM	451 ^{+0.5} _{-0.0} MM	411 ^{+0.5} _{-0.0} MM	381MM	315MM	294MM	10
DMI-809SND 18"	457MM	528 ^{+0.5} _{-0.0} MM	488 ^{+0.5} _{-0.0} MM	528 ^{+0.5} _{-0.0} MM	488 ^{+0.5} _{-0.0} MM	457MM	340MM	372MM	10
DMI-809SND 21"	533MM	603 ^{+0.5} _{-0.0} MM	563 ^{+0.5} _{-0.0} MM	603 ^{+0.5} _{-0.0} MM	563 ^{+0.5} _{-0.0} MM	533MM	380MM	448MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-810SHD






US 3 fold full extension soft closing undermount slide with handle




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg~45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 15" 18" 21" 24"
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

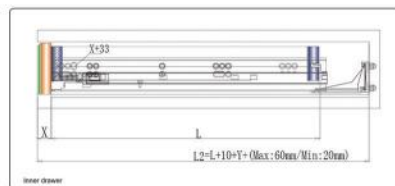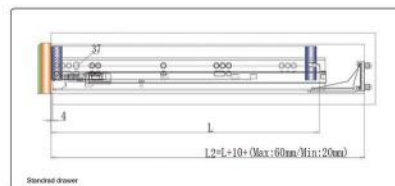

Installation of hole drawings

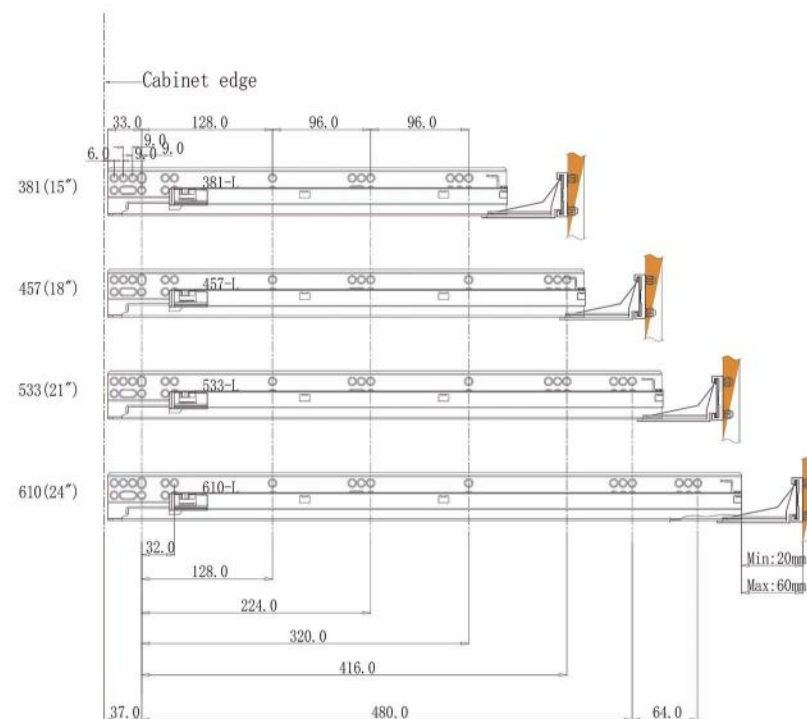

Item No	Nominal length L	Cabinet inner Min depth L2				Drawer Hole L1	Packing(Set/Cnt)
		Standard Drawer		Inner Drawer			
		Max	Min	Max	Min		
DMI-810SHD 15"	381MM	451 ^{+0.5} _{-0.0} MM	411 ^{+0.5} _{-0.0} MM	451 ^{+0.5} _{-0.0} MM	411 ^{+0.5} _{-0.0} MM	381.0MM	10
DMI-810SHD 18"	457MM	528 ^{+0.5} _{-0.0} MM	488 ^{+0.5} _{-0.0} MM	528 ^{+0.5} _{-0.0} MM	488 ^{+0.5} _{-0.0} MM	457.0MM	10
DMI-810SHD 21"	533MM	603 ^{+0.5} _{-0.0} MM	563 ^{+0.5} _{-0.0} MM	603 ^{+0.5} _{-0.0} MM	563 ^{+0.5} _{-0.0} MM	533.0MM	10
DMI-810SHD 24"	610MM	680 ^{+0.5} _{-0.0} MM	640 ^{+0.5} _{-0.0} MM	680 ^{+0.5} _{-0.0} MM	640 ^{+0.5} _{-0.0} MM	610.0MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.

DMI-810SND






US 3 fold full extension soft closing undermount slide with adjustable nail




- Applicable drawer side panel thickness: 10mm-16mm
- Maximum load: 35kg-45kg
- Installation form: Bottom of the drawer
- Material: Galvanized steel
- Length: 15" 18" 21"
- Material thickness (upper/middle/lower rail): 1.2X1.5X1.8mm

Installation Dimensions(mm)

SKW=Internal Drawer Width Y=Drawer plate thickness
LW=Internal Cabinet Width X=Drawer plate thickness

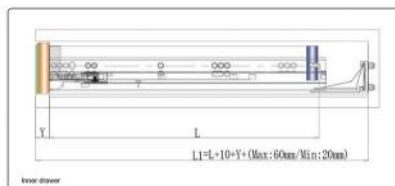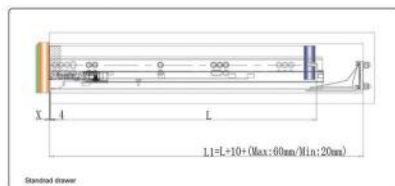

Installation of hole drawings

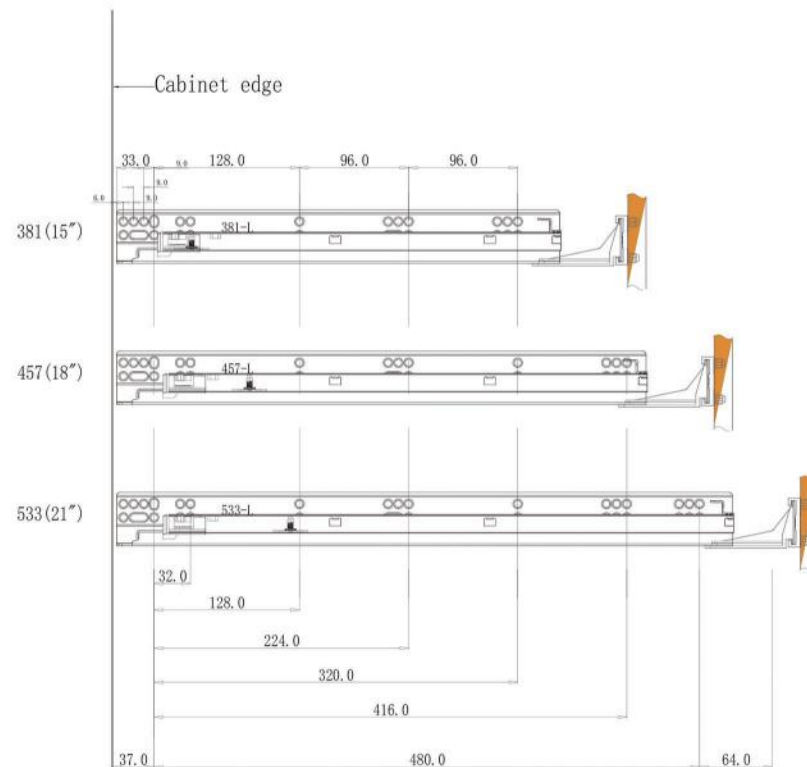

Item No	Nominal length L	Cabinet inner Min depth L1				Nominal length L2	REGULATE Screw Max. Min. L3	Fix Hole L4	Parting Depth
		Standard Drawer		Inner Drawer					
		Max	Min	Max	Min				
DMI-810SND 15"	381MM	451 ^{+0.5} _{-0.0} MM	411 ^{+0.5} _{-0.0} MM	451 ^{+0.5} _{-0.0} MM	411 ^{+0.5} _{-0.0} MM	381MM	315MM	294MM	10
DMI-810SND 18"	457MM	528 ^{+0.5} _{-0.0} MM	488 ^{+0.5} _{-0.0} MM	528 ^{+0.5} _{-0.0} MM	488 ^{+0.5} _{-0.0} MM	457MM	340MM	372MM	10
DMI-810SND 21"	533MM	603 ^{+0.5} _{-0.0} MM	563 ^{+0.5} _{-0.0} MM	603 ^{+0.5} _{-0.0} MM	563 ^{+0.5} _{-0.0} MM	533MM	380MM	448MM	10

Note: This product specification model is more, the parameters are for reference only, the specific data, to prevail in kind.