



序号/Rev.No.	名称/Title	文件编号/File No.
1	XY129 螺丝 (二)	QJ/XYT-2141101
2	XY129 铜方块 (二)	QJ/XYT-2141102
3	XY129V-A 端子	QJ/XYT-2141103
4	XY129V 塑件5.0	QJ/XYT-2141104

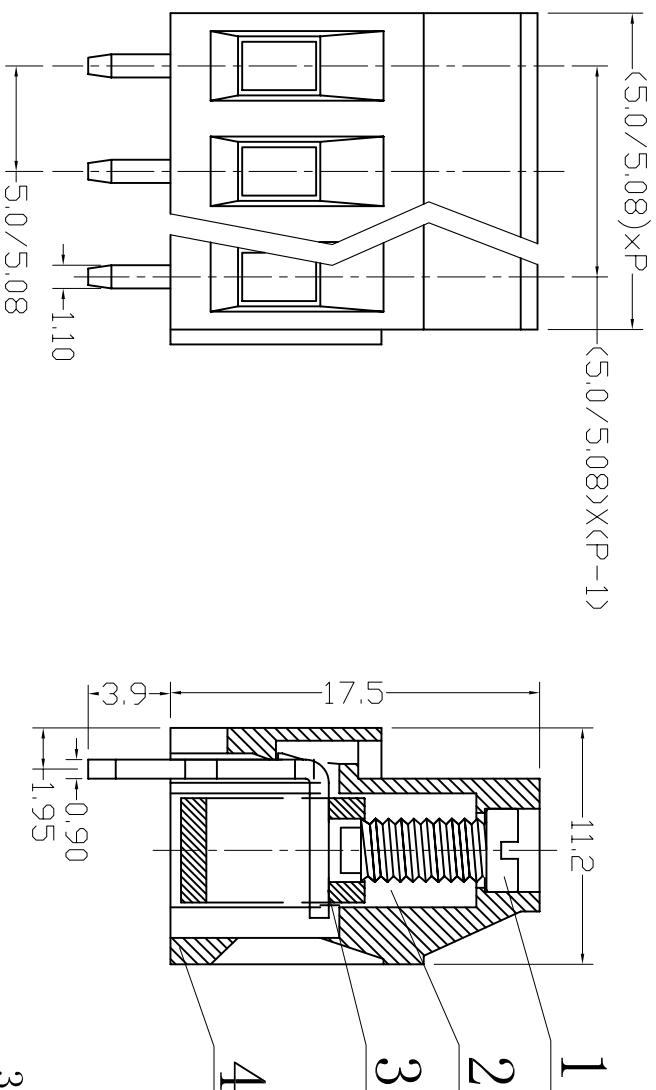

300V 20A 26-12AWG 2.5mm²
 Poles: 2P&3P-24p
 Pitch: 5.0mm (.197")/5.08mm (.200")

Materials
 Housing: PA66 (UL 94V-0)
 Wire Cage: Brass, Nickel Plated
 Solder Pin: Brass, Tin Plated
 Screw: M3, Steel (A3), Zinc Plated
 Torque: 0.5N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X ±0.2 X ±0.1 XX ±0.05 XXX ±0.01



新莱亚电子
 XINLEIYA ELECTRONIC CO., LTD

序号/Rev.No.

更改记录/Revision note

签名/Signature

日期/Date

图名/Title

文件编号/File No.

产品图

页序/Sheet

单位/Unit: mm