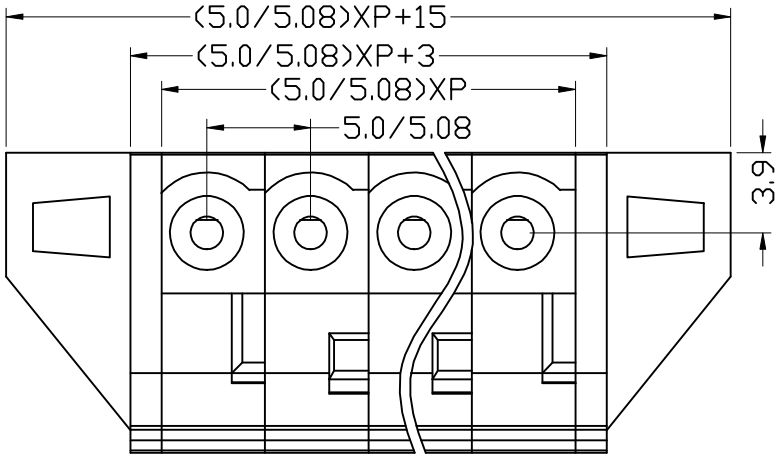

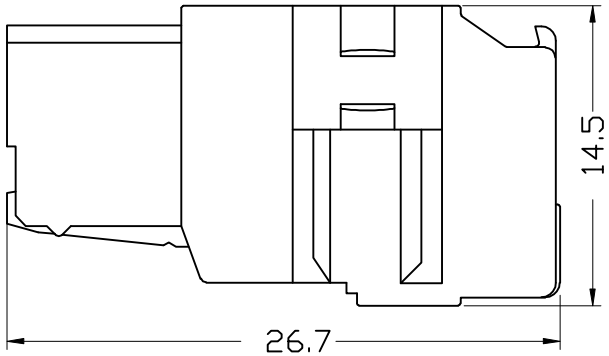

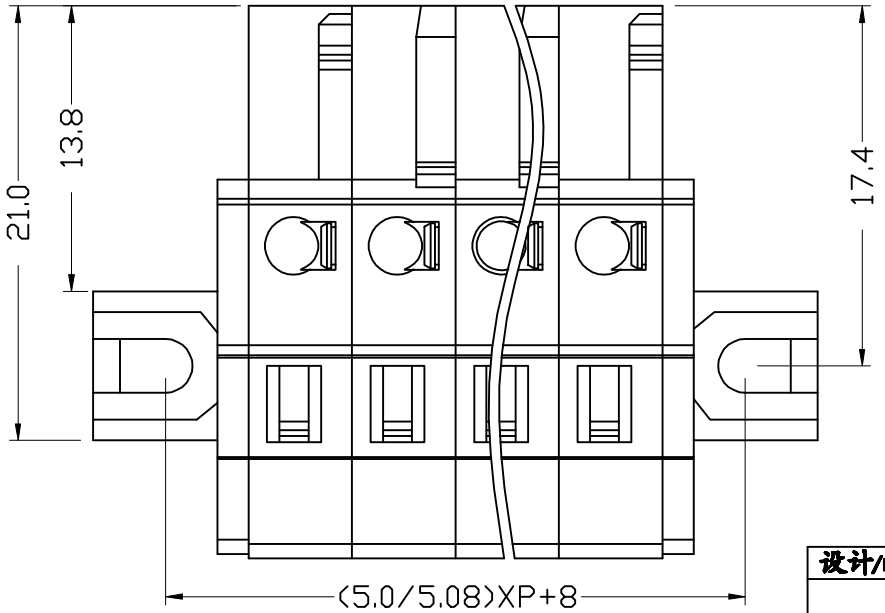

300V 15A 22-14AWG 2.5mm^2
Piles: (2-24P)
Pitch: 5.0mm(.197")/5.08mm(.200")

Material
Housing: PA66(UL 94V-0)
Wire guard: Stainless steel
Contact: Phosphor Bronze

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.° ±2° .x ±0.1 .x° ±1° .xx ±0.05 .xx°±0.5° .xxx ±0.01

新莱亚电子
XINLAIYA ELECTRONIC CO.,LTD

图名/File name	文件编号/File No.
XY2505FMB- 5.0 5.08	
页序/Sheet	
备注/Remark	单位/Units: mm

序号/Revno.	更改记录/Revision note	签名/Signature	日期/Date